
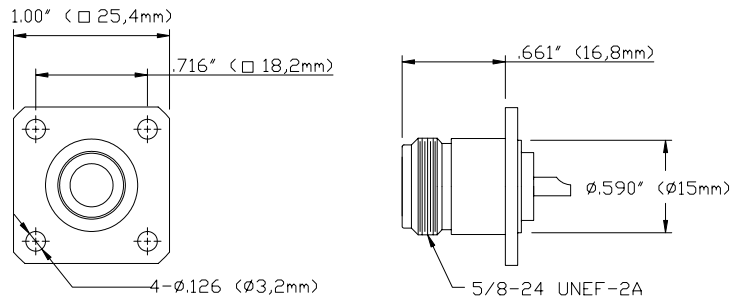


Model 6769
N (F) Panel Mount, 75 Ω



Model 6769 TYPE N (F) Panel Mount, 75 Ω

Use 75 Ω Pomona BNC connectors with panel or box broadcast applications

Features

- True 75 Ω.
- Designed for panel mount applications.
- Precision machined.
- Gold plated (15 micro-inches) contacts.
- Insulation material is PTFE (**not delrin**).

Materials

- Body is machined brass with tarnish resistant nickel plating.
- Female center contact is gold-plated, heat-treated Beryllium copper.
- Body made from precision machined high quality brass (not die cast).
- High quality machined PTFE dielectric.

Ordering Information

Model: 6769

Specifications

Nominal impedance	75 Ω
Frequency	0-3 GHz
VSWR	1.10 max. 0-1 GHz 1.35 max. 1-3 GHz
Center / outer contact Resistance	1.5 / 1.0 mΩ
Number of insertions	500
Dielectric withstand voltage	1500 Vrms
Ratings: Voltage: 500 Vrms Operating temperature: -85 °F to +329 °F (-65 °C to +165 °C) Max.	

USA: Sales: 800-490-2361 Technical Support: 800-241-2060 Fax: 888-403-3360

Europe: 31-(0) 40 2675 150 International: 425-446-5500

e-mail: technicalsupport@pomonatest.com

Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.