

2.0×1.6mm for Consumer Products/ Mobile Communications/ Automotive



RoHS Compliant

**Features**

- Crystal unit for Consumer Products
- Ultra-miniature and low profile (2.0×1.6×0.40mm)
- Ceramic package
- Reflow compatible
- AEC-Q200 qualified (Please contact us for Automotive use)

**Applications**

- Digital Electronics
- Consumer Products
- Mobile Communications, Bluetooth®, Wireless LAN
- Car Electronics

\* Bluetooth® Trademarks are owned by Bluetooth SIG Inc.

**How to Order**

CX2016DB 27000

- ① Series (CX2016DB)
- ② Frequency
- ③ Load Capacitance    ④ Frequency Tolerance
- ⑤ Operating Temp. Range    ⑥ Frequency Temp. Stability
- ⑦ Individual Specification

<b>D0</b>	8 pF	<b>G</b>	±15×10 <sup>-6</sup>
<b>EJ</b>	-10 to +70°C		±15×10 <sup>-6</sup>
<b>LJ</b>	-30 to +85°C		±15×10 <sup>-6</sup>
<b>SS</b>	-40 to +125°C		±50×10 <sup>-6</sup>

Packaging (Tape & Reel 1000/ 3000 pcs./ reel)

**Specifications**

Item	Symbol	Specification	Units	Remarks
Frequency Range	f <sub>nom</sub>	16000 to 60000	kHz	
Overtone Order	OT	Fundamental	—	
Load Capacitance	CL	8	pF	Please contact us for other Load Capacitance.
Frequency Tolerance	f <sub>tol</sub>	±15	×10 <sup>-6</sup>	25°C±3°C
Motional Series Resistance	R1	Table 1	ohm	
Drive Level	DL	Table 2	μW	
Operating Temp. Range	T <sub>use</sub>	-10 to +70    -30 to +85    -40 to +125	°C	
Storage Temp. Range	T <sub>stg</sub>	-40 to +85    -40 to +125	°C	
Frequency Temp. Characteristics	f <sub>tem</sub>	±15    ±50	×10 <sup>-6</sup>	Freq. deviation from the value at 25°C

Please contact us for other specifications.

**Table1 Motional Series Resistance**


Frequency Range	Motional Series Resistance
16000≤f <sub>nom</sub> <18000kHz	200Ω max.
18000≤f <sub>nom</sub> <26000kHz	150Ω max.
26000≤f <sub>nom</sub> <40000kHz	60Ω max.
40000≤f <sub>nom</sub> ≤60000kHz	50Ω max.

**Table2 Level of Drive**

Frequency Range	Level of Drive
16000≤f <sub>nom</sub> ≤60000kHz	10μW (100μW max.)

**Dimensions**

(Unit: mm)

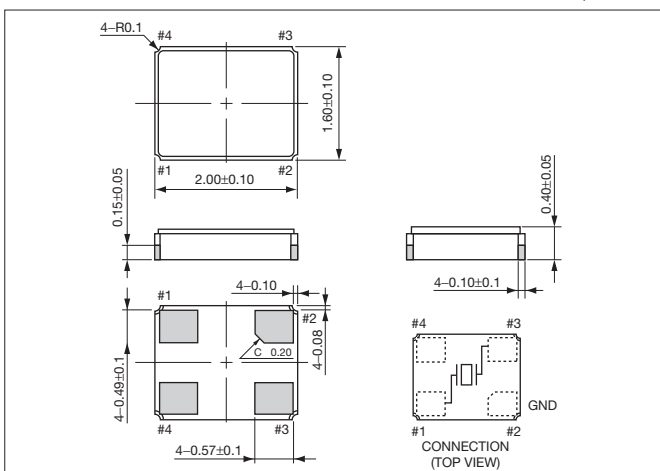

**Recommended Land Pattern**

(Unit: mm)

