


TLC Series



Tantalum Solid Electrolytic Chip Capacitors Consumer Series

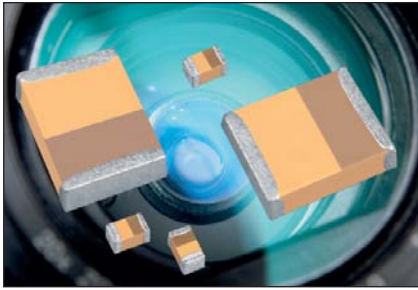


FEATURES

- High capacitance vs. voltage ratio
- Super high volumetric efficiency
- CV range: 0.47-220µF / 2-35V
- 12 case sizes available
- Consumer applications (portable handheld electronics, cellular phones, digital equipments etc.)



APPLICATIONS

- Consumer portable applications with space limitations

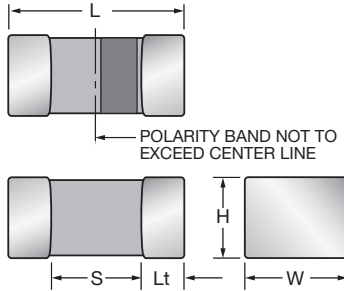


CASE DIMENSIONS: millimeters (inches)

| Code | EIA Code | EIA Metric | L+0.20 (0.008) -0.00 (0.000) | W+0.15 (0.006) -0.00 (0.000) | H+0.15 (0.006) -0.00 (0.000) | Termination Spacing(S) | Minimum Termination Length (Lt) |
|------|----------|------------|---------------------------------|--|--|------------------------|---------------------------------|
| D | 1206 | 3216-06 | 3.20 ± 0.20 (0.126 ± 0.008) | 1.60 ± 0.20 (0.063 ± 0.008) | 0.60 (0.024) max | 1.80 (0.071) min | 0.15 (0.006) |
| E* | 0201 | 0603-03 | 0.60 ± 0.12 (0.024 ± 0.005) | 0.33 ± 0.02 (0.013 ± 0.001) | 0.33 ± 0.02 (0.013 ± 0.001) | 0.20 (0.008) min | 0.10 (0.004) |
| H | 0805 | 2012-10 | 2.00 (0.079) | 1.35 (0.053) | 1.00 (0.039) max | 0.70 (0.028) min | 0.15 (0.006) |
| J | 0603 | 1608-08 | 1.60 (0.063) | 0.85 (0.033) | 0.75 (0.030) max | 0.55 (0.022) min | 0.15 (0.006) |
| K | 0402 | 1005-07 | 1.00 (0.039) | 0.50 ^{+0.20} _{-0.00} (0.020 -0.000) | 0.50 ^{+0.20} _{-0.00} (0.020 -0.000) | 0.40 (0.016) min | 0.10 (0.004) |
| L | 0603 | 1608-10 | 1.60 (0.063) | 0.85 (0.033) | 0.85 (0.033) | 0.55 (0.022) min | 0.15 (0.006) |
| M | 0803 | 2008-10 | 2.00 (0.079) | 0.85 (0.033) | 0.85 (0.033) | 0.70 (0.028) min | 0.15 (0.006) |
| R | 0805 | 2012-15 | 2.00 (0.079) | 1.35 (0.053) | 1.35 (0.053) | 0.70 (0.028) min | 0.15 (0.006) |
| T | 1210 | 3528-12 | 3.50 ± 0.20 (0.138 ± 0.008) | 2.80 ^{+0.20} _{-0.10} (0.110 -0.004) | 1.20 (0.047) max | 2.00 (0.079) min | 0.15 (0.006) |
| U | 0805 | 2012-06 | 2.00 (0.079) | 1.35 (0.053) | 0.60 (0.024) max | 0.70 (0.028) min | 0.15 (0.006) |
| V | 1206 | 3216-08 | 3.20 ± 0.20 (0.126 ± 0.008) | 1.60 ± 0.20 (0.063 ± 0.008) | 0.75 (0.030) max | 1.80 (0.071) min | 0.15 (0.006) |
| Z | 0602 | 1605-07 | 1.60 (0.063) | 0.50 ^{+0.20} _{-0.00} (0.020 -0.000) | 0.50 ^{+0.20} _{-0.00} (0.020 -0.000) | 0.55 (0.022) min | 0.15 (0.006) |


*Please contact AVX, availability upon request

MARKING

D, H, J, K, L, M, R, T, U, V, Z CASE



E CASE



HOW TO ORDER

TLC

Type

L

Case Size
See table above

226

Capacitance Code
pF code: 1st two digits represent significant figures, 3rd digit represents multiplier (number of zeros to follow)

M

Tolerance
M=±20%

006

Rated DC Voltage
002=2Vdc
003=3Vdc
004=4Vdc
006=6.3Vdc
008=8Vdc
010=10Vdc
016=16Vdc
020=20Vdc
025=25Vdc
035=35Vdc

R

Packaging
R, P = 7" Standard Tin Termination Plastic Tape
X, Q = 4 1/4" Standard Tin Termination Plastic Tape
A, M = 7" Gold Termination Plastic Tape
F, N = 4 1/4" Gold Termination Plastic Tape
H = Chip Tray (waffle) Only case E

TA

Standard Suffix
OR

4000

ESR in mΩ

TECHNICAL SPECIFICATIONS

| | | | | | | | | | | | | |
|----------------------------|---|-----|-----|-----|-----|-----|----|-----|----|------|------|--|
| Technical Data: | All technical data relate to an ambient temperature of +25°C | | | | | | | | | | | |
| Capacitance Range: | 0.47 μ F to 220 μ F | | | | | | | | | | | |
| Capacitance Tolerance: | $\pm 20\%$ | | | | | | | | | | | |
| Rated Voltage (V_R) | -55°C \leq +40°C: | 2 | 3 | 4 | 6.3 | 8 | 10 | 16 | 20 | 25 | 35 | |
| Category Voltage (V_C) | at 85°C: | 1 | 1.5 | 2 | 3.2 | 4 | 5 | 8 | 10 | 12.5 | 17.5 | |
| Category Voltage (V_C) | at 125°C: | 0.4 | 0.6 | 0.8 | 1.3 | 1.6 | 2 | 3.2 | 4 | 5 | 7 | |
| Temperature Range: | -55°C to +125°C with category voltage | | | | | | | | | | | |
| Reliability: | 0.2% per 1000 hours at 85°C, 0.5x V_R with 0.1 Ω /V series impedance with 60% confidence level | | | | | | | | | | | |

CAPACITANCE AND RATED VOLTAGE RANGE (LETTER DENOTES CASE SIZE)


| Capacitance | | Voltage Rating DC (V_R) to 40°C | | | | | | | | | |
|-------------|------|-------------------------------------|------|-------|-----------------|----|-----|-----|-----|-----|-----|
| μ F | Code | 2.0V | 3.0V | 4.0V | 6.3V | 8V | 10V | 16V | 20V | 25V | 35V |
| 0.47 | 474 | | | | E* | | | K | | | |
| 1.0 | 105 | | | | E* | | | K | | L | R |
| 2.2 | 225 | | | | | | K | | H | R | |
| 3.3 | 335 | | | | | | | L | | | |
| 4.7 | 475 | | | K | K/U | | J | | | | |
| 6.8 | 685 | | K | K | | | U | | | | |
| 10 | 106 | | K | J/K/Z | J/K/Z | | U | V | R | | |
| 15 | 156 | K | | K | | | H/L | | | | |
| 22 | 226 | J | J | U | L/U | | L/M | | | | |
| 33 | 336 | | | L/U | H/L/L(4000)/U/V | L | H | | | | |
| 47 | 476 | L | L/R | H/L | H/L/R/V | D | H/R | | | | |
| 68 | 686 | | | R | R | | | | | | |
| 100 | 107 | | | R | R/T | | T | | | | |
| 150 | 157 | | | | | | | | | | |
| 220 | 227 | | | T | | | | | | | |

Released ratings, (ESR ratings in mOhms in parentheses)

[Engineering samples - please contact AVX](#)

*Please contact AVX, availability upon request

Note: Voltage ratings are minimum values. AVX reserves the right to supply higher voltage ratings in the same case size, to the same reliability standards.

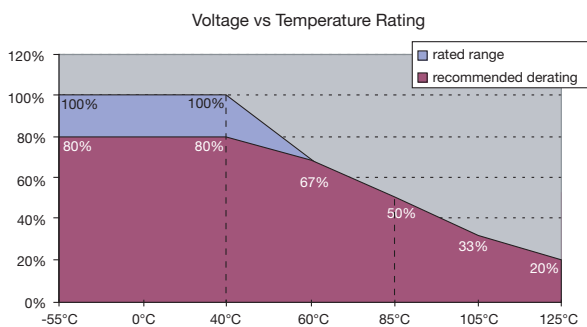

TLC Series



Tantalum Solid Electrolytic Chip Capacitors Consumer Series

RATINGS & PART NUMBER REFERENCE

| AVX Part No. | Case Size | Capacitance (µF) | Rated Voltage (V) | Rated Temperature (°C) | Category Voltage (V) | Category Temperature (°C) | DCL Max. (µA) | ESR Max. @ 100kHz (Ω) | 100kHz RMS Current (mA) | | | MSL |
|------------------------|-----------|------------------|-------------------|------------------------|----------------------|---------------------------|---------------|-----------------------|-------------------------|------|-------|-----|
| | | | | | | | | | 25°C | 85°C | 125°C | |
| 2 Volt @ 40°C | | | | | | | | | | | | |
| TLCK156M002#TA | K | 15 | 2 | 40 | 0.4 | 125 | 0.5 | 15 | 32 | 28 | 13 | 3 |
| TLCJ226M002#TA | J | 22 | 2 | 40 | 0.4 | 125 | 0.5 | 7.5 | 52 | 46 | 21 | 3 |
| TLCL476M002#TA | L | 47 | 2 | 40 | 0.4 | 125 | 0.9 | 7.5 | 58 | 52 | 23 | 3 |
| 3 Volt @ 40°C | | | | | | | | | | | | |
| TLCK685M003#TA | K | 6.8 | 3 | 40 | 0.6 | 125 | 0.5 | 15 | 32 | 28 | 13 | 3 |
| TLCK106M003#TA | K | 10 | 3 | 40 | 0.6 | 125 | 0.5 | 15 | 32 | 28 | 13 | 3 |
| TLCJ226M003#TA | J | 22 | 3 | 40 | 0.6 | 125 | 0.7 | 7.5 | 52 | 46 | 21 | 3 |
| TLCL476M003#TA | L | 47 | 3 | 40 | 0.6 | 125 | 1.4 | 7.5 | 58 | 52 | 23 | 3 |
| TLCR476M003#TA | R | 47 | 3 | 40 | 0.6 | 125 | 3.0 | 7.5 | 77 | 70 | 31 | 3 |
| 4 Volt @ 40°C | | | | | | | | | | | | |
| TLCK475M004#TA | K | 4.7 | 4 | 40 | 0.8 | 125 | 0.5 | 15 | 32 | 28 | 13 | 3 |
| TLCK685M004#TA | K | 6.8 | 4 | 40 | 0.8 | 125 | 0.5 | 15 | 32 | 28 | 13 | 3 |
| TLCJ106M004#TA | J | 10 | 4 | 40 | 0.8 | 125 | 0.5 | 7.5 | 52 | 46 | 21 | 3 |
| TLCK106M004#TA | K | 10 | 4 | 40 | 0.8 | 125 | 0.5 | 15 | 32 | 28 | 13 | 3 |
| TL CZ106M004#TA | Z | 10 | 4 | 40 | 0.8 | 125 | 0.5 | 15 | 37 | 33 | 15 | 3 |
| TLCK156M004#TA | K | 15 | 4 | 40 | 0.8 | 125 | 3.0 | 15 | 32 | 28 | 13 | 3 |
| TL CU226M004#TA | U | 22 | 4 | 40 | 0.8 | 125 | 0.9 | 12 | 54 | 49 | 22 | 3 |
| TLCL336M004#TA | L | 33 | 4 | 40 | 0.8 | 125 | 1.3 | 7.5 | 58 | 52 | 23 | 3 |
| TL CU336M004#TA | U | 33 | 4 | 40 | 0.8 | 125 | 2.6 | 9 | 62 | 56 | 25 | 3 |
| TLCH476M004#TA | H | 47 | 4 | 40 | 0.8 | 125 | 1.9 | 5 | 89 | 80 | 36 | 3 |
| TLCL476M004#TA | L | 47 | 4 | 40 | 0.8 | 125 | 1.9 | 7.5 | 58 | 52 | 23 | 3 |
| TL CR686M004#TA | R | 68 | 4 | 40 | 0.8 | 125 | 2.7 | 5 | 95 | 85 | 38 | 3 |
| TL CR107M004#TA | R | 100 | 4 | 40 | 0.8 | 125 | 4.0 | 5 | 95 | 85 | 38 | 3 |
| TLCT227M004#TA | T | 220 | 4 | 40 | 0.8 | 125 | 8.8 | 1 | 200 | 180 | 80 | 3 |
| 6.3 Volt @ 40°C | | | | | | | | | | | | |
| TLCE474M006HTA* | E | 0.47 | 6.3 | 40 | 1.3 | 125 | 1.0 | 60 | 13 | 12 | 5 | 3 |
| TLCE105M006HTA* | E | 1 | 6.3 | 40 | 1.3 | 125 | 1.0 | 60 | 13 | 12 | 5 | 3 |
| TLCK475M006#TA | K | 4.7 | 6.3 | 40 | 1.3 | 125 | 0.5 | 15 | 32 | 28 | 13 | 3 |
| TL CU475M006#TA | U | 4.7 | 6.3 | 40 | 1.3 | 125 | 0.5 | 5 | 84 | 75 | 33 | 3 |
| TLCJ106M006#TA | J | 10 | 6.3 | 40 | 1.3 | 125 | 0.6 | 7.5 | 52 | 46 | 21 | 3 |
| TLCK106M006#TA | K | 10 | 6.3 | 40 | 1.3 | 125 | 3.1 | 15 | 32 | 28 | 13 | 3 |
| TL CZ106M006#TA | Z | 10 | 6.3 | 40 | 1.3 | 125 | 0.6 | 15 | 37 | 33 | 15 | 3 |
| TLCL226M006#TA | L | 22 | 6.3 | 40 | 1.3 | 125 | 1.4 | 7.5 | 58 | 52 | 23 | 3 |
| TL CU226M006#TA | U | 22 | 6.3 | 40 | 1.3 | 125 | 2.8 | 12 | 54 | 49 | 22 | 3 |
| TLCH336M006#TA | H | 33 | 6.3 | 40 | 1.3 | 125 | 2.0 | 5 | 89 | 80 | 36 | 3 |
| TLCL336M006#TA | L | 33 | 6.3 | 40 | 1.3 | 125 | 2.1 | 7.5 | 58 | 52 | 23 | 3 |
| TLCL336M006#4000 | L | 33 | 6.3 | 40 | 1.3 | 125 | 2.1 | 4 | 79 | 71 | 32 | 3 |
| TL CU336M006#TA | U | 33 | 6.3 | 40 | 1.3 | 125 | 10.4 | 7.5 | 68 | 61 | 27 | 3 |
| TL CV336M006#TA | V | 33 | 6.3 | 40 | 1.3 | 125 | 4.2 | 5 | 84 | 75 | 33 | 3 |
| TLCH476M006#TA | H | 47 | 6.3 | 40 | 1.3 | 125 | 3.0 | 5 | 89 | 80 | 36 | 3 |
| TLCL476M006#TA | L | 47 | 6.3 | 40 | 1.3 | 125 | 29.6 | 10 | 50 | 45 | 20 | 3 |
| TL CR476M006#TA | R | 47 | 6.3 | 40 | 1.3 | 125 | 6.0 | 5 | 95 | 85 | 38 | 3 |
| TL CV476M006#TA | V | 47 | 6.3 | 40 | 1.3 | 125 | 6.0 | 15 | 48 | 43 | 19 | 3 |
| TL CR686M006#TA | R | 68 | 6.3 | 40 | 1.3 | 125 | 4.3 | 5 | 95 | 85 | 38 | 3 |
| TL CR107M006#TA | R | 100 | 6.3 | 40 | 1.3 | 125 | 6.0 | 5 | 95 | 85 | 38 | 3 |
| TLCT107M006#TA | T | 100 | 6.3 | 40 | 1.3 | 125 | 31.5 | 15 | 52 | 46 | 21 | 3 |
| 8 Volt @ 40°C | | | | | | | | | | | | |
| TLCL336M008#TA | L | 33 | 8 | 40 | 1.6 | 125 | 26.4 | 10 | 50 | 45 | 20 | 3 |
| TLCD476M008#TA | D | 47 | 8 | 40 | 1.6 | 125 | 18.8 | 7 | 71 | 64 | 28 | 3 |
| 10 Volt @ 40°C | | | | | | | | | | | | |
| TLCK225M010#TA | K | 2.2 | 10 | 40 | 2 | 125 | 0.5 | 15 | 32 | 28 | 13 | 3 |
| TL CJ475M010#TA | J | 4.7 | 10 | 40 | 2 | 125 | 0.5 | 10 | 45 | 40 | 18 | 3 |
| TL CU685M010#TA | U | 6.8 | 10 | 40 | 2 | 125 | 0.7 | 5 | 84 | 75 | 33 | 3 |
| TL CU106M010#TA | U | 10 | 10 | 40 | 2 | 125 | 1.0 | 5 | 84 | 75 | 33 | 3 |
| TLCH156M010#TA | H | 15 | 10 | 40 | 2 | 125 | 1.5 | 5 | 58 | 52 | 23 | 3 |
| TLCL156M010#TA | L | 15 | 10 | 40 | 2 | 125 | 1.5 | 7.5 | 89 | 80 | 36 | 3 |
| TLCL226M010#TA | L | 22 | 10 | 40 | 2 | 125 | 11 | 10 | 50 | 45 | 20 | 3 |
| TL CM226M010#TA | M | 22 | 10 | 40 | 2 | 125 | 2.2 | 7.5 | 63 | 57 | 25 | 3 |
| TLCH336M010#TA | H | 33 | 10 | 40 | 2 | 125 | 3.3 | 5 | 89 | 80 | 36 | 3 |
| TLCH476M010#TA | H | 47 | 10 | 40 | 2 | 125 | 23.5 | 7.5 | 73 | 66 | 29 | 3 |
| TL CR476M010#TA | R | 47 | 10 | 40 | 2 | 125 | 4.7 | 5 | 95 | 85 | 38 | 3 |
| TLCT107M010#TA | T | 100 | 10 | 40 | 2 | 125 | 10 | 1 | 200 | 180 | 80 | 3 |
| 16 Volt @ 40°C | | | | | | | | | | | | |
| TLCK474M016#TA | K | 0.47 | 16 | 40 | 3.2 | 125 | 0.5 | 15 | 32 | 28 | 13 | 3 |
| TLCK105M016#TA | K | 1 | 16 | 40 | 3.2 | 125 | 0.8 | 15 | 32 | 28 | 13 | 3 |
| TLCL335M016#TA | L | 3.3 | 16 | 40 | 3.2 | 125 | 0.5 | 7.5 | 58 | 52 | 23 | 3 |
| TL CV106M016#TA | V | 10 | 16 | 40 | 3.2 | 125 | 1.6 | 2 | 132 | 119 | 53 | 3 |

TLC Series



Tantalum Solid Electrolytic Chip Capacitors Consumer Series

RATINGS & PART NUMBER REFERENCE

| AVX Part No. | Case Size | Capacitance (μF) | Rated Voltage (V) | Rated Temperature (°C) | Category Voltage (V) | Category Temperature (°C) | DCL Max. (μA) | ESR Max. @ 100kHz (Ω) | 100kHz RMS Current (mA) | | | MSL |
|-----------------------|-----------|------------------|-------------------|------------------------|----------------------|---------------------------|---------------|-----------------------|-------------------------|------|-------|-----|
| | | | | | | | | | 25°C | 85°C | 125°C | |
| 20 Volt @ 40°C | | | | | | | | | | | | |
| TLCH225M020#TA | H | 2.2 | 20 | 40 | 4 | 125 | 0.5 | 7.5 | 89 | 80 | 36 | 3 |
| TLCR106M020#TA | R | 10 | 20 | 40 | 4 | 125 | 0.6 | 5 | 95 | 85 | 38 | 3 |
| 25 Volt @ 40°C | | | | | | | | | | | | |
| TLCL105M025#TA | L | 1.0 | 25 | 40 | 5 | 125 | 0.5 | 7.5 | 58 | 85 | 23 | 3 |
| TLCR225M025#TA | R | 2.2 | 25 | 40 | 5 | 125 | 0.6 | 5 | 95 | 85 | 38 | 3 |
| 35 Volt @ 40°C | | | | | | | | | | | | |
| TLCR105M035#TA | R | 1.0 | 35 | 40 | 7 | 125 | 0.5 | 5 | 95 | 85 | 38 | 3 |

*Please contact AVX, availability upon request

Moisture Sensitivity Level (MSL) is defined according to J-STD-020.

All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5V RMS with a maximum DC bias of 2.2 volts. DCL is measured at rated voltage after 5 minutes.

DCL allowed to move up to 2.00 times the limit post mounting.

For typical weight and composition see page 261.

NOTE: AVX reserves the right to supply higher voltage ratings or tighter tolerance part in the same case size, to the same reliability standards.

QUALIFICATION TABLE

| TEST | TLC series (Temperature range -55°C to +125°C) | | | | | | | | | | | |
|-----------------------|--|---------------|----------------|-----------------------|--------------------|------------------------------|-------|-------|-------|-------|--------|-------|
| | Condition | | | | Characteristics | | | | | | | |
| Endurance | Apply rated voltage (Ur) at 40°C and / or category voltage (Uc) at 85°C for 2000 hours through a circuit impedance of ≤0.1Ω/V. Stabilize at room temperature for 1-2 hours before measuring. | | | | Visual examination | no visible damage | | | | | | |
| | | | | | DCL | 1.25 x initial limit | | | | | | |
| | | | | | ΔC/C | within ±30% of initial value | | | | | | |
| | | | | | ESR | 1.5 x initial limit | | | | | | |
| Humidity | Store at 40°C and 90-95% relative humidity for 56 days, with no applied voltage. Stabilize at room temperature and humidity for 1-2 hours before measuring. | | | | Visual examination | no visible damage | | | | | | |
| | | | | | DCL | 2 x initial limit | | | | | | |
| | | | | | ΔC/C | ±30% of initial value | | | | | | |
| | | | | | ESR | 1.25 x initial limit | | | | | | |
| Temperature Stability | Step | Temperature°C | Duration (min) | Voltage Applied | | | | | | | | |
| | 1 | +20 | 15 | N/A | +20°C | -55°C | +20°C | +40°C | +60°C | +85°C | +125°C | +20°C |
| | 2 | -55 | 15 | N/A | DCL | | | | | | | IL* |
| | 3 | +20 | 15 | N/A | | | | | | | | IL* |
| | 4 | +40 | 15 | V _R | ΔC/C | | | | | | | n/a |
| | 5 | +60 | 15 | 0.66 x V _R | | | | | | | | n/a |
| | 6 | +85 | 15 | 0.50 x V _R | ESR | | | | | | | IL* |
| | 7 | +125 | 15 | 0.20 x V _R | | | | | | | | IL* |
| 8 | +20 | 15 | N/A | | | | | | | | | |
| Surge Voltage | Apply 1.3x rated voltage (Ur) at 40°C for 1000 cycles of duration 6 min (30 sec charge, 5 min 30 sec discharge) through a charge / discharge resistance of 1000Ω | | | | Visual examination | no visible damage | | | | | | |
| | | | | | DCL | 2 x initial limit | | | | | | |
| | | | | | ΔC/C | within ±30% of initial value | | | | | | |
| | | | | | ESR | 1.25 x initial limit | | | | | | |


*Initial Limit

TLC Series




Tantalum Solid Electrolytic Chip Capacitors Consumer Series

AVX SOLID ELECTROLYTIC CAPACITOR ROADMAP

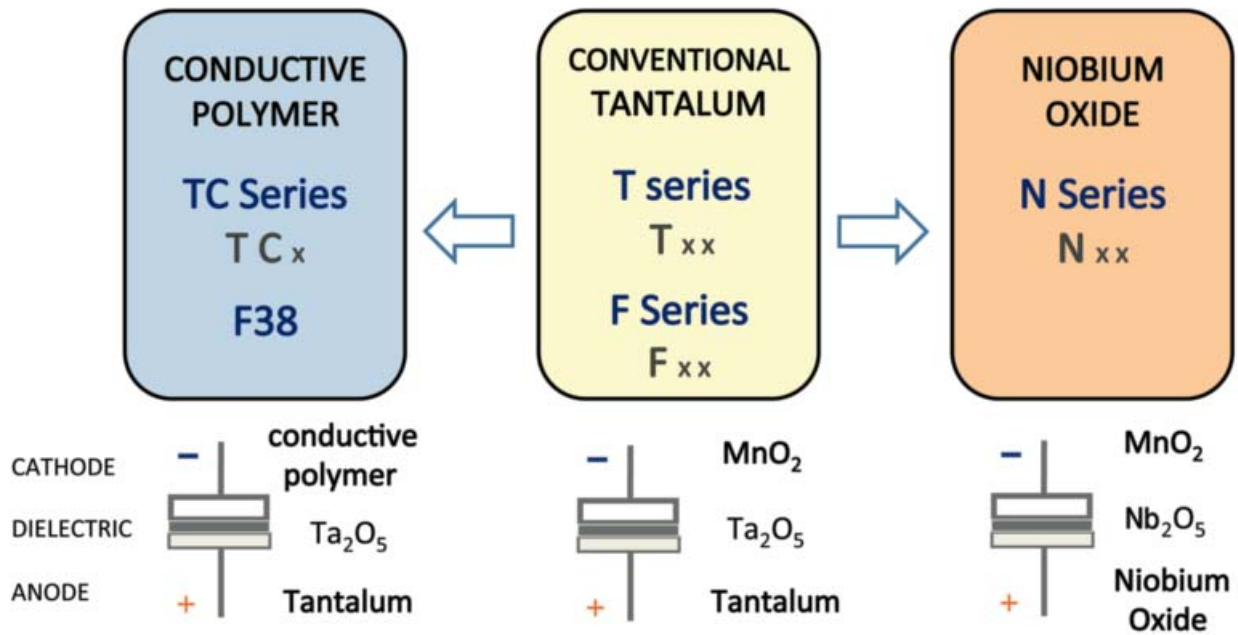

Five Capacitor Construction Styles

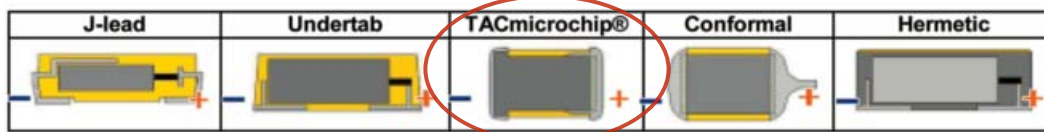

SERIES LINE UP: CONVENTIONAL SMD MnO₂

