

5.0×3.2mm for Consumer Products



RoHS Compliant

Features

- Crystal unit for Consumer Products
- Small and low profile (T=1.1mm max.) (5.0×3.2×1.0mm)
- Ceramic package
- Reflow compatible

Applications

- Digital Electronics
- Consumer Products

How to Order

CX5032GB 27000
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series
- ② Frequency
- ③ Load Capacitance
- ④ Frequency Tolerance
- ⑤ Operating Temp. Range
- ⑥ Frequency Temp. Stability
- ⑦ Individual Specification

HO 12 pF **H** ±20×10⁻⁶

EQ -10 to +70°C ±30×10⁻⁶

Packaging (Tape & Reel 1000/ 3000 pcs./ reel)

Specifications

Item	Symbol	Specification	Units	Remarks
Frequency Range	f _{nom}	7372.8 to 54000	kHz	
Overtone Order	OT	Fundamental	—	
Load Capacitance	CL	12	pF	Please contact us for other Load Capacitance.
Frequency Tolerance	f _{tol}	±20	×10 ⁻⁶	25°C±3°C
Motional Series Resistance	R1	Table 1	ohm	
Drive Level	DL	Table 2	μW	
Operating Temp. Range	T _{use}	-10 to +70	°C	
Storage Temp. Range	T _{stg}	-40 to +85	°C	
Frequency Temp. Characteristics	f _{tem}	±30	×10 ⁻⁶	Freq. deviation from the value at 25°C

Please contact us for other specifications.

Table1 Motional Series Resistance


Frequency Range	Motional Series Resistance
7372.8≤f _{nom} < 9500kHz	300Ω max.
9500≤f _{nom} <10000kHz	200Ω max.
10000≤f _{nom} <14000kHz	150Ω max.
14000≤f _{nom} <20000kHz	100Ω max.
20000≤f _{nom} <30000kHz	70Ω max.
30000≤f _{nom} ≤54000kHz	50Ω max.

Table2 Level of Drive

Frequency Range	Level of Drive
7372.8≤f _{nom} <16000kHz	10μW (500μW max.)
16000≤f _{nom} <25000kHz	10μW (300μW max.)
25000≤f _{nom} ≤54000kHz	10μW (100μW max.)

Dimensions

(Unit: mm)

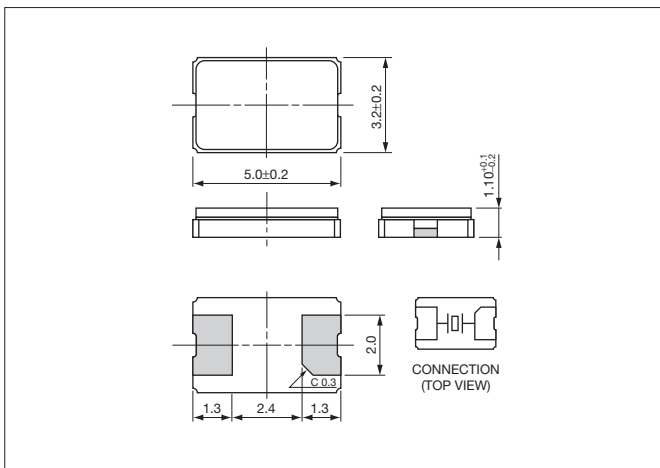

Recommended Land Pattern

(Unit: mm)

