



This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be distributed, reproduced or used, in whole or in part, without the prior consent of Amphenol Corporation. Amphenol Corporation will not be held liable for any errors or omissions in this document or to use any information in this document.

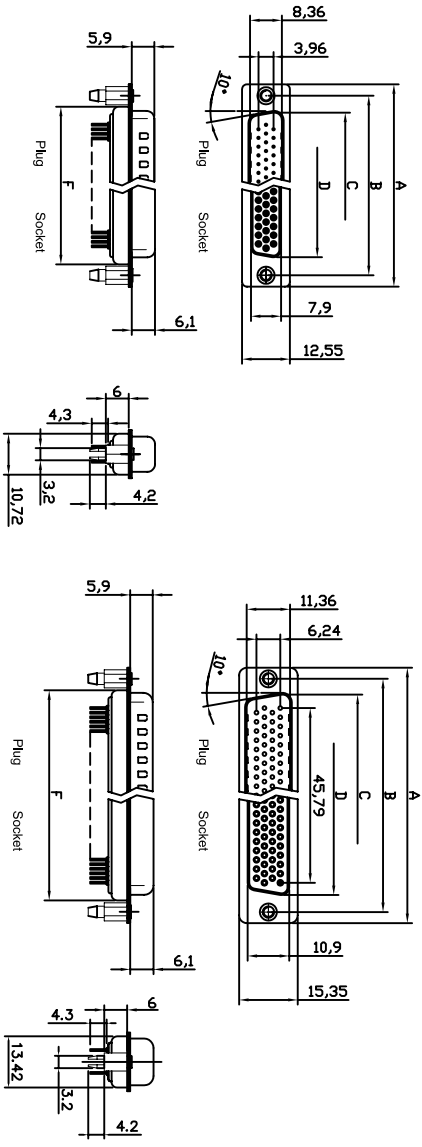

Dimensions

Positions	A	B	C	D	E	F
15	30.81	24.99	16.92	16.33	2.29	19.20
26	39.14	33.32	25.50	24.66	2.29	27.70
44	53.04	47.04	38.96	38.38	2.29	41.10
62	69.32	63.50	55.42	54.84	2.41	57.30
78	66.90	61.11	52.86	52.20	2.41	55.10

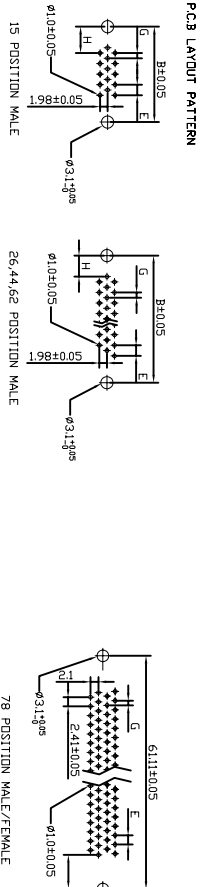

Positions	G	H
15M/F	1.14	7.04
26M/F	1.14	6.88
44M/F	1.14	6.88
62M/F	1.25	7.00
78M/F	1.20	7.65



REVISIONS

S/N	EDN	DESCRIPTION	DATE	APPROVED
B			12/01/07	

D-SUB TECHNICAL DATA

Product Specification

Material and Finish
 Insulator: PBT + Glass-filled thermoplastic, UL-94V-0 rated.
 Male Contact: Brass per QQ-B-626, selected gold over full tin.
 Female Contact: Phosphor Bronze per QQB-750, selected gold over full tin.
 Metal Shell: Carbon steel per ASTM-A-109, tin over nickel.
 Boardlock: Copper alloy, tin over nickel.
 Screwlock: Brass per QQ-B-626, tin over nickel.

Electrical


Contact Resistance: 25 milliohms max. At 1 ampere Dc.
 Insulation Resistance: 5000 megohms at 500 VDC.
 Dielectric Withstanding Voltage: 1000 VAC/rms 60Hz for one minute.
 Current Rating: 1 amperes per contact.
 Voltage Rating: 250 VAC/rms 60Hz.

Environmental

Operating Temperature: -55C to +105C.
 Humidity: 24hours at 40C/95%R.H.

PRODUCT CODE

L717HDE 15P OL2

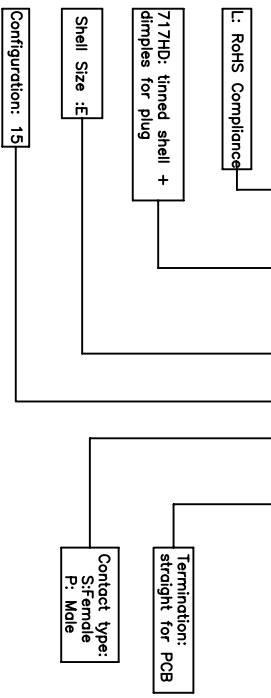

UNLESS OTHERWISE SPECIFIED

TOLERANCES	U.S.	METRIC	APPROVAL	DATE
XX	±0.50		DRAWN	LEON TUI/2/06/07
XX	±0.30		CHECKED	ERIC HZ/06/07
XX	±0.20			

FOR MATERIALS AND FINISHES REMOVE SHARP EDGES

DIMENSIONS	ANGLES OF PROJECTION	SIZE	DRAWING NO.	SCALE	SHEET	REV.
TH	TH	A4	C	L717HDE15POL2	1	B
METRIC	METRIC	NONE			1	

TITLE
D-SUB contacts, HD series

Amphenol