


CONFIGURATION	PART NUMBER	LENGTH
MINI, DN, THIN, M-STR, F-STR	MN57A4AD02Mxxx	TBD

## DIMENSIONS

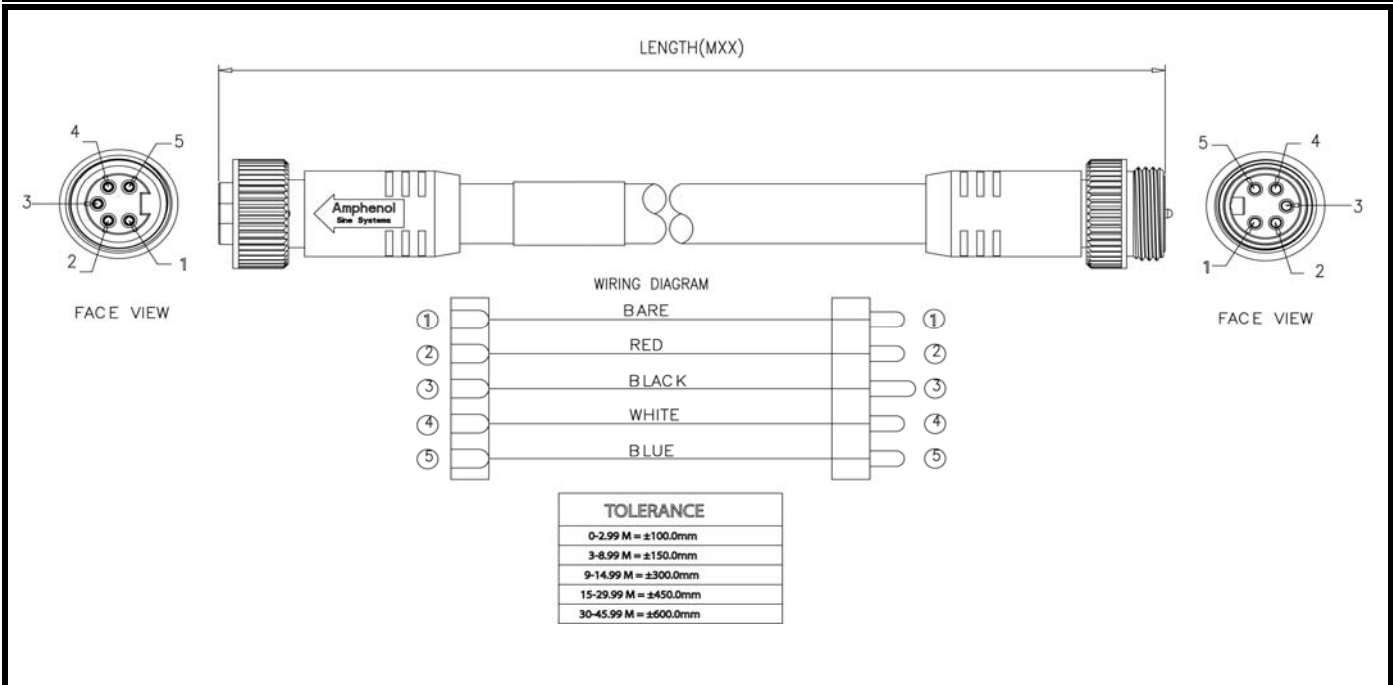

## TECHNICAL DATA

<b>TEMPERATURE RANGE:</b>	-20C to +105C
<b>PROTECTION:</b>	IP 68, NEMA 6P
<b>VOLTAGE RATING:</b>	600VAC/600VDC
<b>AMPERAGE:</b>	8A
<b>BODY:</b>	OIL RESISTANT PVC
<b>CONTACTS:</b>	COPPER ALLOY
<b>CONTACT PLATING:</b>	5 INCHES (MIN) GOLD, OVER 25 INCHES (MIN) NICKEL
<b>CONNECTOR FACE:</b>	PVC
<b>COUPLER:</b>	MACHINED ALUMINUM, ANODIZED
<b>CABLE TYPE:</b>	DEVICE NET, THICK, UL TYPE CL2 OR PLTC
<b>RECEPTACLE HOUSING:</b>	MACHINED ALUMINUM, ANODIZED

## NOTES

--	--