


| CONFIGURATION             | PART NUMBER    | LENGTH |
|---------------------------|----------------|--------|
| MINI, 3 PIN, M-STR, F-STR | MN33A4AC01Mxxx | TBD    |

## DIMENSIONS

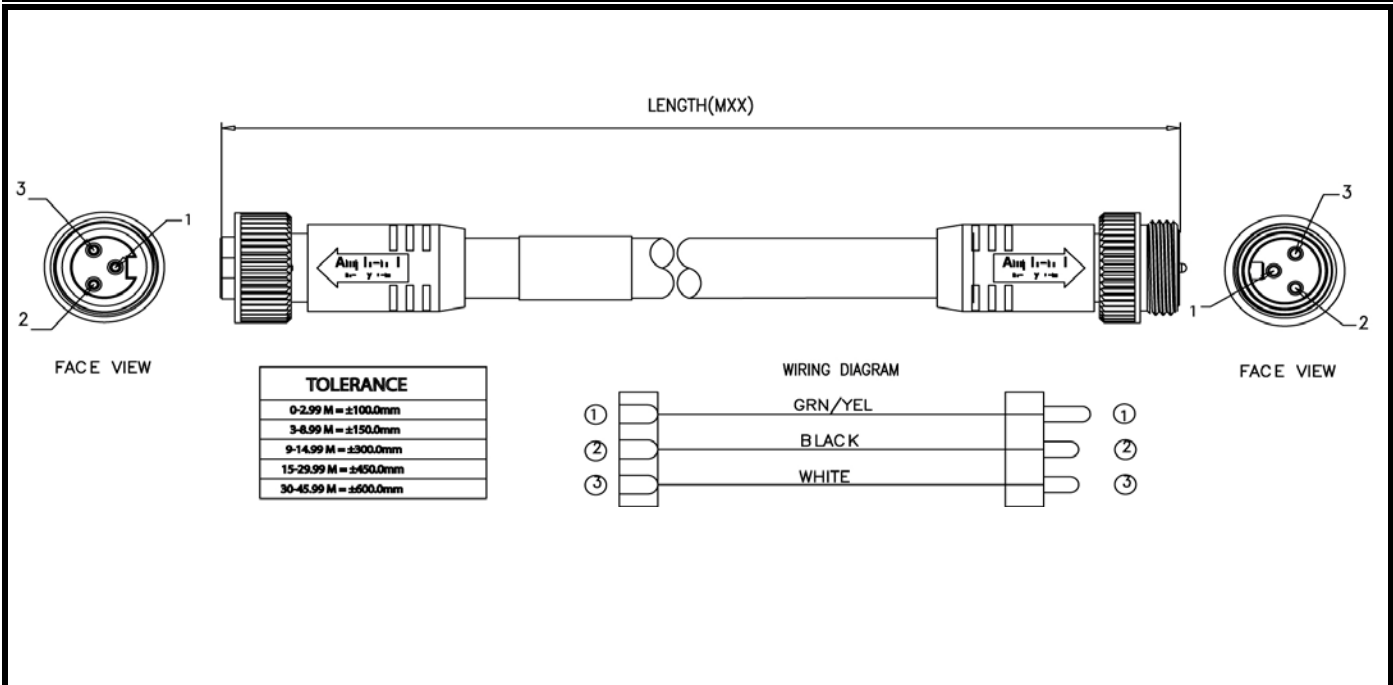

## TECHNICAL DATA

|                            |  |
|----------------------------|--|
| <b>TEMPERATURE RANGE:</b>  | -20C to +105C                                    |
| <b>PROTECTION:</b>         | IP 68, NEMA 6P                                   |
| <b>VOLTAGE RATING:</b>     | 600VAC/600VDC                                    |
| <b>AMPERAGE:</b>           | 10A  |
| <b>BODY:</b>               | OIL RESISTANT PVC                                |
| <b>CONTACTS:</b>           | COPPER ALLOY                                     |
| <b>CONTACT PLATING:</b>    | 5 INCHES (MIN) GOLD, OVER 25 INCHES (MIN) NICKEL |
| <b>CONNECTOR FACE:</b>     | PVC  |
| <b>COUPLER:</b>            | MACHINED ALUMINUM, ANODIZED                      |
| <b>RECEPTACLE HOUSING:</b> | MACHINED ALUMINUM, ANODIZED                      |

## NOTES