

NOTES:

1. MATERIALS AND FINISHES:
 BODY - BRASS, NICKEL PLATING
 CONTACT - BERYLLIUM COPPER, SILVER PLATING
 INSULATOR - PTFE
2. ELECTRICAL:
 A. IMPEDANCE: 50 OHM
 B. FREQUENCY RANGE: DC - 2 GHz
3. MECHANICAL:
 A. DURABILITY: 500 CYCLES MIN.
 B. TEMPERATURE RANGE: -65° C TO +165° C
4. MAX. PANEL THICKNESS=6.35mm


THIRD ANGLE PROJ.

REVISIONS


REV	DESCRIPTION	DATE	ECO	APPR
P	STAMP "AMPHENOL " WAS "74868 " \RD-DM12033001R3	12 Feb 12	48876	

4±0.03
[.157±.0012]


∅9.7±0.05
[.382±.002]



SCALE 5.000
RECOMMENDED
MOUNTING HOLE

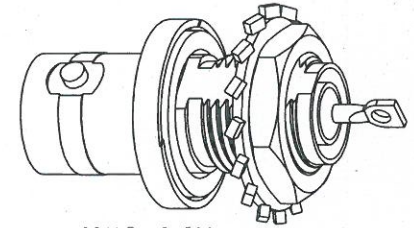

SCALE 2.500

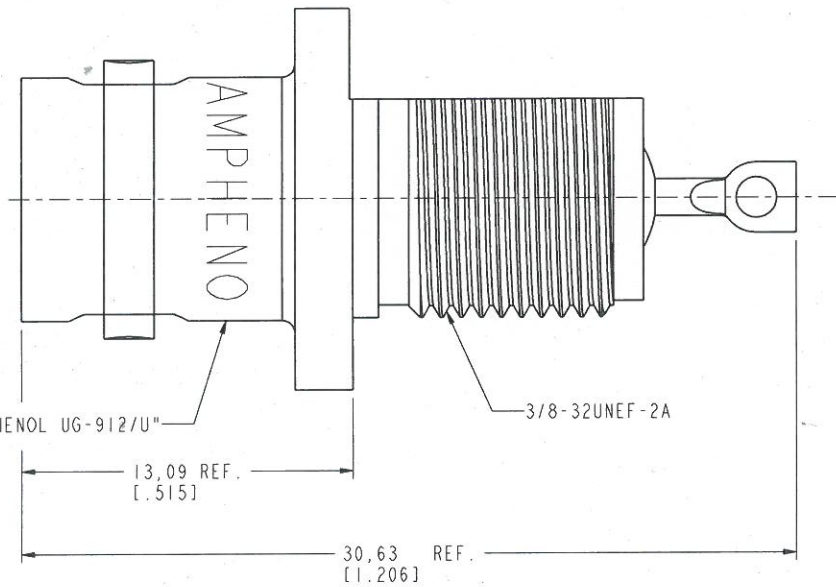

STAMP "AMPHENOL UG-912/U"


13,09 REF.
[.515]

30,63 REF.
[1.206]

3/8-32UNEF-2A

1,57 REF.
[.062]


∅13,28 REF.
[.523]

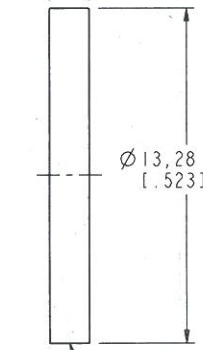

GASKET



LOCKWASHER



12.7 HEX

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE:
 <0.5mm ±0.05mm 0.5 - 6mm ±0.1mm 6 - 30mm ±0.2mm 30 - 120mm ±0.3mm ANGLES ±1°

NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

MATERIAL	DRAWN R. MAO	DATE 06-Mar-12	TITLE TYPE BNC RECEPTACLE PRESSURIZED UG-912/U		Amphenol RF www.amphenolrf.com
REFERENCE EAR # AND CONFIGURATION LEVEL: □□□□	ENGINEER T. AUBIN	DATE 06-Mar-12	DRAWING NO. 31-238		
FINISH	APPROVED S. HSIEH	DATE 06-Mar-12	SCALE: 5.0:1.0	SHEET 2 OF 2	ITEM NO. 31-238
	CAD FILE		DWG SIZE B	REV P	PART NO. 31-238