

FOR REFERENCE ONLY

SPECIFICATIONS:

AC RATING: 10 AMPS @115VAC (RESISTIVE LOAD)
 5 AMPS @115VAC (INDUCTIVE LOAD)
 3 AMPS @115VAC (LAMP LOAD)

DC RATING: 10 AMPS @28VDC (RESISTIVE LOAD)
 5 AMPS @28VDC (INDUCTIVE LOAD)
 3 AMPS @28VDC (LAMP LOAD)

TYPE 7 CONTACT ARRANGEMENTS:
 1/2 AMPERAGE LOADS SHOWN ABOVE

MECHANICAL LIFE: 500,000 CYCLES
 ACTION: MOMENTARY SNAP OR PUSH PULL

OPERATING FORCE:
 SERIES 20 & 30: 3 TO 5 POUNDS MOMENTARY
 1/2 TO 2 POUNDS PUSH-PULL

SERIES 22 & 32: 2 TO 3 POUNDS MOMENTARY
 WEIGHT: .050 POUNDS MAXIMUM



CASE: ALUMINUM ALLOY 2011-T3,
 CLEAR ANODIZED IAW MIL-A-8625

PLUNGER: GLASS FILLED NYLON

BODY: DIALLYL PHTHALATE IAW MIL-M-14

TERMINALS: THREADED #2-56 NC-2B

B NX321AB1B-XX

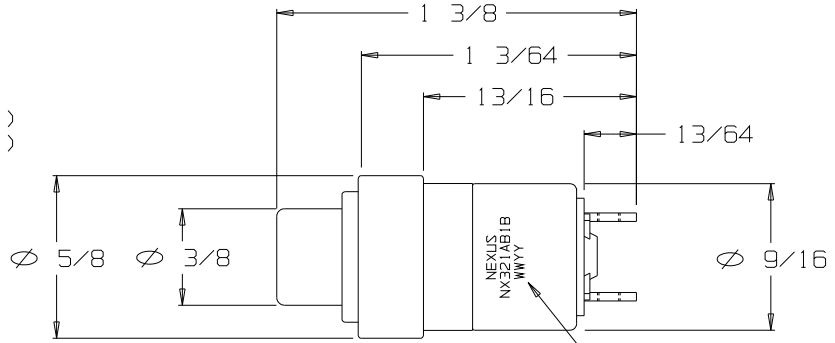

"WWYY" IS THE DATE CODE

DESCRIPTION

DUSTPROOF "SERIES 32" MOMENTARY SWITCH
 CONTACTS SPNO - SINGLE POLE NORMALLY OPEN
 ADAPTER TYPE "A", COLOR BLACK
 BUTTON #1, COLOR BLACK

ORDERING INFORMATION:

NX321AB1B-00 SWITCH ONLY
 NX321AB1B-01 SWITCH, TERNIMAL HARDWARE
 NX321AB1B-00EU SWITCH (ROHS) ONLY
 NX321AB1B-01EU SWITCH (ROHS), TERNIMAL HARDWARE



SW-200-23
 TERMINAL
 (2)



SW-200-25
 #2 LOCKWASHER
 (2)



SW-200-72
 #2-56 SCREW
 (2)

TERMINAL
 HARDWARE

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF NEXUS, INCORPORATED AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR ANY PURPOSE WITHOUT THE WRITTEN CONSENT OF NEXUS.

DWN. BY	EWT	DATE	11/14/06	MATERIAL	N/A
CHECKED BY		DATE		FINISH	N/A
APPR. BY		DATE		WEIGHT	—
				SCALE	N/A
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON				TITLE SWITCH SPNO MOMENTARY 2 LB	
.XX .XXX ANGLES				SIZE B	
— ±.003 ±.5°				DWG. NO. NX321AB1B-XX	
LET.	REVISION	CN #	DATE	CHK.	DO NOT SCALE DWG. SHEET 1 OF 1

NEXUS
 STAMFORD, CONN

SIZE **B** DWG. NO. NX321AB1B-XX