unimec™ 16310 - 16315

Technical Data

- Max. 250mA/120V/9W AC/6W DC
- 2 pole
- momentary or alternate
- 8 contact functions
- temperature range:
  low temp: -40/+75°C
  high temp: -40/+160°C
- through-hole version

Dimensions (through-hole)

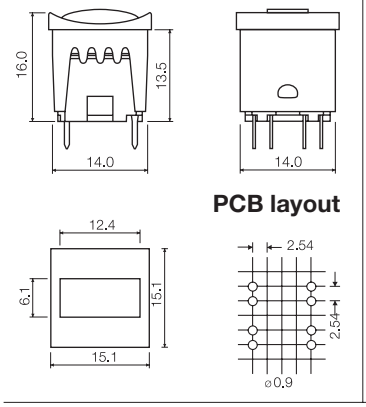

Dimensions (w/LED)

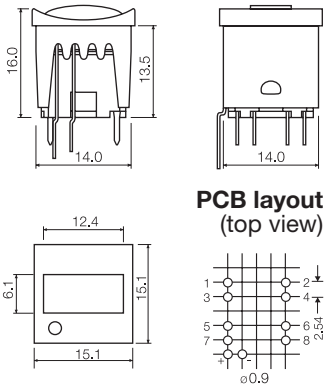

Dimensions (w/LED)

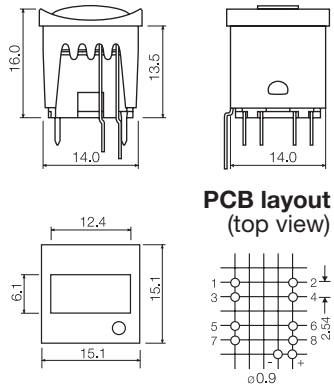

Dimensions (w/4 LEDs)

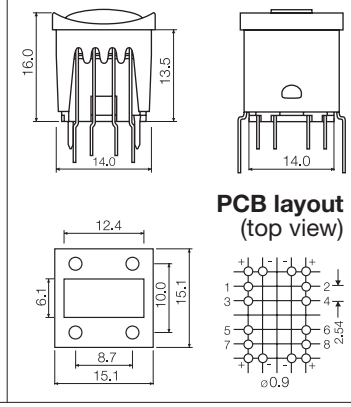

How to order

1 5	+	1 6 3 0 0	+	1 6 3 1 0
Switch		**Cap**		**Bezel**
15501 mom. silver		**00** blue		**00** blue
15551 alt. silver		**01** brown		**01** brown
15502 mom. gold		**02** green		**02** green
15552 alt. gold		**03** grey		**03** grey
15500 silent silver		**04** yellow		**04** yellow
15401 mom. silver high temp.		**05** golden		**05** golden
15402 mom. gold high temp.		**06** white		**06** white
15420 silent gold high temp.		**07** orange		**07** orange
15451 alt. silver high temp.		**08** red		**08** red
		09 black		**09** black

For 16300 and 16310 only
30 ultra blue
40 dusty blue
42 aqua blue
32 mint green
33 tele grey
34 melon
38 noble red
50 metal dark blue
53 metal light grey
57 metal dark grey
58 metal bordeaux

1 5	+	1 6 3 0 0	+		+	1 6 9 2 1
Switch		**Cap**		**Bezel 16311**		**LED 16921** **02** green
						04 yellow
						08 red
					+	1 6 9 2 0
				Bezel 16312		**LED 16920** **02** green
						04 yellow
						08 red
				Bezel 16314		**LED 16920** 1 required **LED 16921** 1 required
				Bezel 16315		**LED 16920** 2 required **LED 16921** 2 required

Ordering example: 15501 + 1630003 + 1631408 + 1692008 + 1692108

For updates of products and/or changes of specifications please see **www.mec.dk**