

# MW173KB

Universal 20 – 32 Watt Series

Medical Switch-Mode Power Supply



3 Year Warranty

- 100-240VAC Universal Input
- Desktop Style
- 5V to 24V Single Output Models, up to 32W
- Modified and Custom Designs
- Regulated Output with Low Ripple
- Impact-Resistant Polycarbonate Enclosure
- No load Power Consumption < 0.50W
- Designed to meet EISA Requirements (see page 3 for details).



International Safety Standard Approvals



## Specifications

All Specifications are typical at nominal input, full load at 25°C unless otherwise stated.

### Output Specifications

<b>Line and Load Voltage Regulation</b>	Excluding Cord	Line: +/-1% Load: +/-5%
<b>Ripple</b>		1% Vp-p max.
<b>Transient Response</b>		0.5mS for 50% Load Change, typical.
<b>Protection</b>		Overcurrent Protection (Hiccup). Short Circuit Protection

### Input Specifications

<b>Input Voltage Range</b>	Universal Input	100-240VAC, -10%, +10%
<b>Line Frequency</b>		47-63Hz
<b>Input Current</b>	90 VAC	1.0A, max.
<b>Protection</b>		Internal Primary Current Fuse, Inrush Limiting

### Environmental Specifications

<b>Thermal Performance</b>	Operating Temperature	0° C to 40° C full load, no derating, convection cooling, Non-vented case
<b>Relative Humidity</b>	Non-condensing	5% to 95%
<b>Altitude</b>		0 to 10,000 feet

### General Specifications

<b>Topology</b>	Switching - Fixed Frequency Flyback
<b>Efficiency</b>	Designed to meet EISA Requirements - see page 3
<b>Hold-up Time</b>	@ 115VAC 18mS, min.
<b>Dielectric Withstand</b>	4,000VAC or 5,656VDC Primary-Secondary; 1,500VAC or 2,150VDC Primary - F.G; 500VDC Secondary - F.G.
<b>Storage Temp.</b>	-30° C to 85° C
<b>Approvals and Safety Standards</b>	UL60601-1 IEC/EN60601-1 EMC: EN60601-1-2/ EN55024
<b>MTBF</b>	100,000 Calculated Hours
<b>Case and Dimensions</b>	Desktop Style: 3.74"L x 2.13"W x 1.26"H 95mm L x 54mm W x 33mm H
<b>Case Material</b>	Black 94V0 Polycarbonate
<b>Cord and Connectors</b>	18AWG, 1,800mm 2 conductor. (5V, 6V model: 1,500mm). Ault #3 connector. Other connectors are available.

# MW173KB

Universal 20-32 Watt Series



Medical Switch Mode Power Supply


3 Year Warranty

OUTPUT PARAMETERS				
Model Number	Volts (V)	Output Current (max)	Max Watts	Ripple (Vp-p max)
MW173KB0503F01	5 V	4.00 A	20.0 W	50mV
MW173KB0603F01	7.5 V	3.00 A	22.5 W	75mV
MW173KB0903F01	9 V	3.00 A	27.0 W	90mV
MW173KB1203F01	12 V	2.50 A	30.0 W	120mV
MW173KB1503F01	15 V	2.00 A	30.0 W	150mV
MW173KB1803F01	18 V	1.67 A	30.0 W	180mV
MW173KB2403F01	24 V	1.33 A	32.0 W	240mV

Note: Part numbers above include #3 output connector and IEC320 C14 grounded input receptacle. See below for other options.

### Model Number Key

**MW173 K B 05 03 F 01**

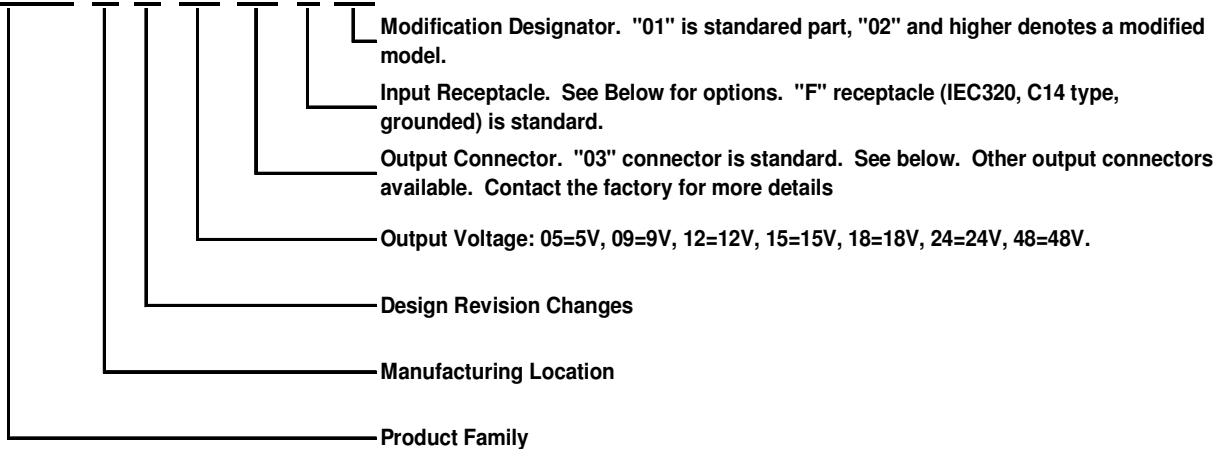

### AC Input Receptacle Options

Desktop			Wall-Plug
IEC320 - C14 Class I Grounded (F)	IEC320 - C18 Class II Ungrounded (Q)	IEC320 - C8 Class II "Shaver" (N)	N. America Japan Fixed (B)

# MW173KB

Universal 20-32 Watt Power Supply

Medical Switch Mode Power Supply



3 Year Warranty

## 2007 Energy Independence and Security Act - EISA

The Energy Independence and Security Act of 2007 was passed in December of 2007 and addresses minimum efficiency standards and standby levels for Class A external power supplies that are 250 Watts and under. This law stipulates that external power supplies manufactured on July 1, 2008 and beyond meet certain minimum efficiency and standby criteria as defined below.

### Minimum Efficiency Criteria:

Active mode is defined as when a power supply's input is connected to a line voltage AC and it's output is connected to a DC or AC load, drawing a portion of the product's power output. Depending upon the power rating for the power supply, it must meet the minimum efficiency criteria outlined below.

### Energy-Efficiency Criteria for Active Mode:


<u>Output Power on Adapter Label</u>	<u>Minimum Average Efficiency Percentage</u>
0 to < 1 Watt	$\geq 0.50 * \text{output power on the label}$
> 1 watt to $\leq 51$ watts	$\geq [0.09 * \ln(\text{output power on adapter label})] + 0.50$
> 51 watts	$\geq 0.85$

### Energy Consumption Criteria for No Load Mode:

The power supply must also meet a requirement for when its input is connected to line voltage AC but its output is not connected to a load. Depending upon the power output of the supply, it must keep its energy consumption below the following values:

<u>Output Power on Adapter Label</u>	<u>Maximum Power Consumption in No-Load Mode</u>
0 to < 250 Watts	$\leq 0.50$ watts

## Output Connector Information

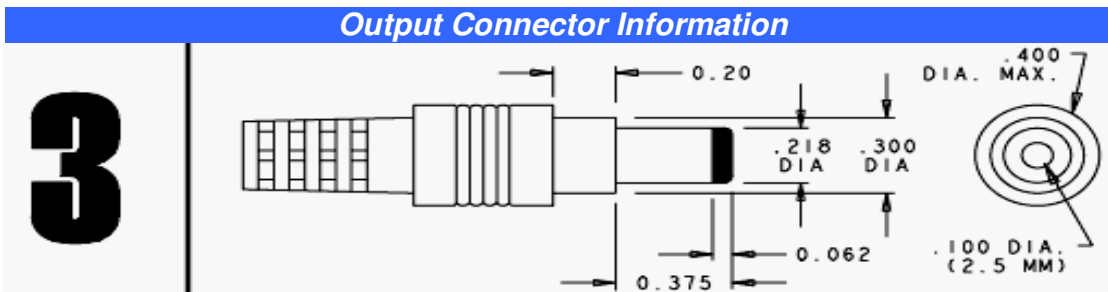

- Notes:
1. Center Contact = Positive
  2. Connector is Switchcraft 760 plug or equivalent.
  3. Suggested Mating Connector is Switchcraft 712A jack or equivalent.
  4. Other output connector options are available. Contact your local representative for details.