

MGA-565P8

20 dBm P_{sat} High Isolation Buffer Amplifier



Data Sheet

Description


The MGA-565P8 is designed for use in LO chains to drive high dynamic range passive mixers. It provides high isolation, high gain, and consistent output power. It is a GaAs MMIC, fabricated using Avago Technologies' cost effective, reliable enhancement mode PHEMT (Pseudomorphic High Electron Mobility Transistor)^[1] process. This device is housed in the LPCC 2x2 mm package. This package offers good thermal dissipation and RF characteristics.

MGA-565P8 features a saturated power of 20 dBm (with 0 dBm input power) and reverse isolation in excess of 40 dB at 2 GHz. The saturated output power can be set between 9 dBm and 20 dBm using an external resistor, with a corresponding adjustment in current consumption.


Notes:

1. Enhancement mode technology employs a single positive V_{gs} , eliminating the need of negative gate voltage associated with conventional depletion mode devices.
2. Conform to JEDEC reference outline MO229 for DRP-N

Pin Connections and Package Marking

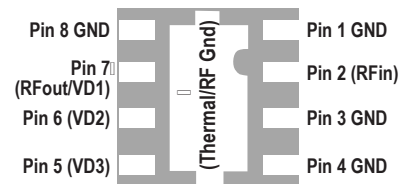

Bottom View



Top View

Note:

Package marking provides orientation and identification

"1B" = Device Code

"x" = Data code indicates the month of manufacture.

Features

- Up to 3.5 GHz operating frequency
- 2:1 VSWR input and output at 2GHz
- Small package size:
2.0 x 2.0 x 0.75 mm LPCC^[3]
- MSL-1 and lead-free
- Tape-and-reel packaging option available

Specifications


@ 2 GHz, $V_d = 5V$, $P_{in} = 0$ dBm

- $P_{sat} = 20$ dBm
- $I_{dsat} = 67$ mA
- Isolation = 42 dB
- Small Signal Gain = 22 dB

Applications

- VCO buffer amplifier for Cellular/PCS or other wireless infrastructures

Simplified Schematic

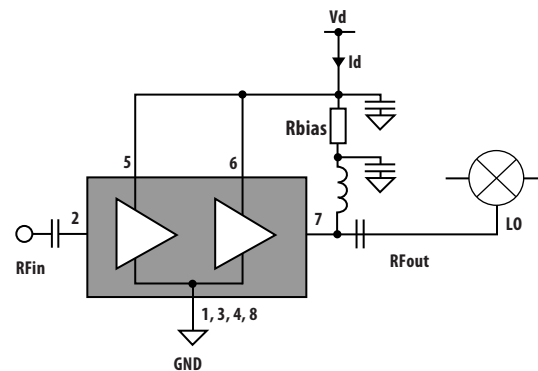

Attention: Observe precautions for handling electrostatic sensitive devices.

ESD Machine Model (Class A)
ESD Human Body Model (Class 0)
Refer to Avago Application Note A004R:
Electrostatic Discharge Damage and Control.

MGA-565P8 Absolute Maximum Ratings^[1]

| Symbol | Parameter | Units | Absolute Maximum |
|-----------------|--|-------|------------------|
| V_d | DC Supply Voltage | V | 8 |
| P_{diss} | Total Power Dissipation ^[2] | mW | 448 |
| $P_{in\ max.}$ | RF Input Power ($V_d = 5V$) | dBm | 15 |
| T_{CH} | Channel Temperature | °C | 150 |
| T_{STG} | Storage Temperature | °C | -65 to 150 |
| $\theta_{ch,b}$ | Thermal Resistance ^[3] | °C/W | 91 |
| | ESD (Human Body Model) | V | 100 |
| | ESD (Machine Model) | V | 30 |

Notes:

1. Operation of this device in excess of any one of these parameters may cause permanent damage.
2. Board (package belly) temperature T_b is 25°C. Derate 11 mW/°C for $T_b > 109^\circ\text{C}$.
3. Channel-to-board thermal resistance measured using 150°C Liquid Crystal Measurement method.

Electrical Specifications

$T_A = 25^\circ\text{C}$, Frequency = 2 GHz, $R_{bias} = 0\Omega$ (unless specified otherwise)

| Symbol | Parameter and Test Condition | Units | Min. | Typ. | Max. |
|--------------------|--|--------------------------------|-------------|------------|------|
| P_{sat} | Saturated Power at 0 dBm input | $V_d = 5V^{[1]}$ $V_d = 3V$ | 18.5 dBm | 20 dBm | |
| I_{dsat} | Saturation Current | $V_d = 5V^{[1]}$ $V_d = 3V$ | 58 mA | 67 mA | 45 |
| ISL ^[1] | Reverse Isolation | | 42 | 50 | |
| Gain | Small Signal Gain | $V_d = 5V^{[1]}$ $V_d = 3V$ | 20 | 21.8 20 | 23.5 |
| I_{ds} | Small Signal Current ($P_{in} = -10\text{ dBm}$) | $V_d = 5V^{[1]}$ $V_d = 3V$ | 33 | 37 27 | |
| RL ^[1] | Return Loss | Input Output | | -8 -10 | |

Notes:

1. Typical value determined from a sample size of 500 parts from 3 wafers.
2. Measurement obtained using production test board described in the block diagram below. Circuit losses have been de-embedded from actual measurements.

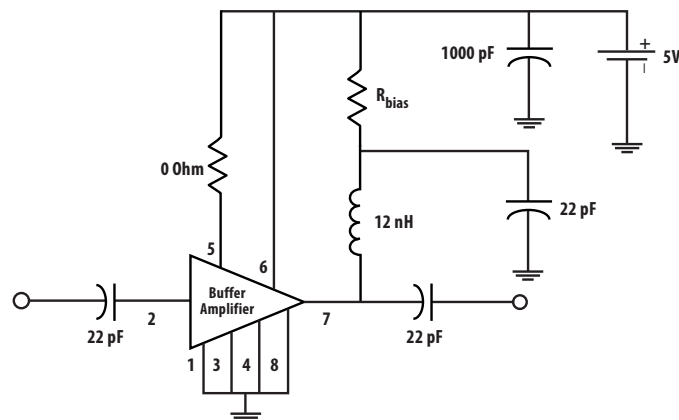


Figure 1. Production Test Circuit Schematic at 2 GHz.

Product Consistency Distribution Charts at 2 GHz^[1, 2]

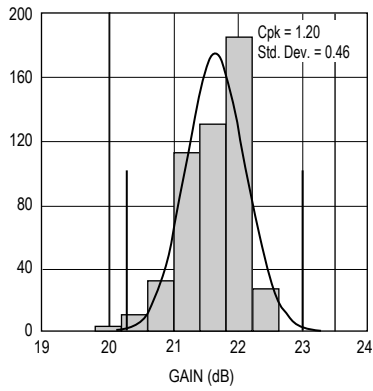


Figure 2. Gain Distribution.[]
LSL = 20.0 dB, USL = 23.5 dB.

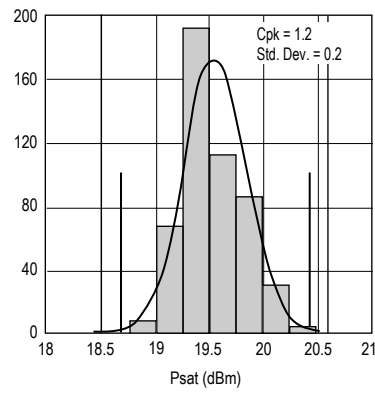


Figure 3. Psat Distribution.[]
LSL = 18.5 dBm, USL = 20.6

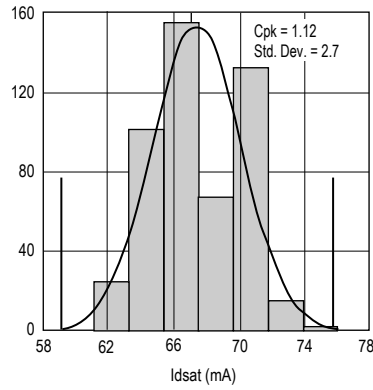


Figure 4. Idsat Distribution.[]
LSL = 58.0 dBm, USL = 78.0 dBm.

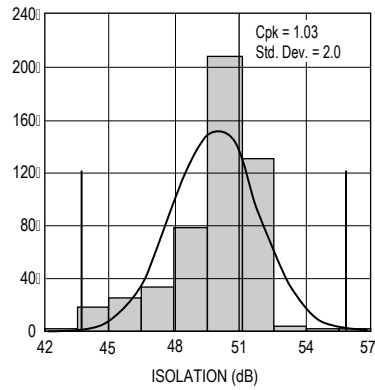


Figure 5. Isolation Distribution.[]
LSL = 42.0 dB, USL = 56.0 dB.

Notes:

1. Statistical distribution determined from a sample size of 500 parts from 3 wafers.
2. Future wafers allocated to this product may have typical values anywhere between the minimum and maximum specification limits.

MGA-565P8 Typical Performance Curves (at 25°C, 2 GHz, $R_{bias} = 0\Omega$, unless specified otherwise)

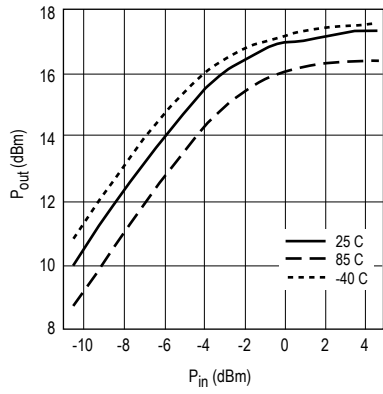


Figure 6. P_{out} vs. P_{in} , $V_d = 3V$.

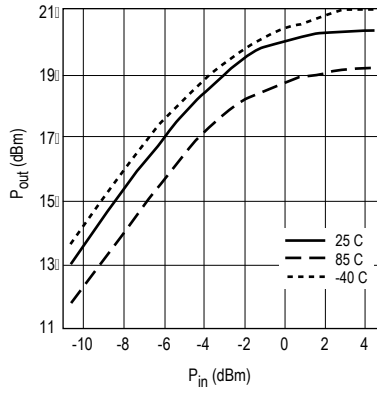


Figure 7. P_{out} vs. P_{in} , $V_d = 5V$.

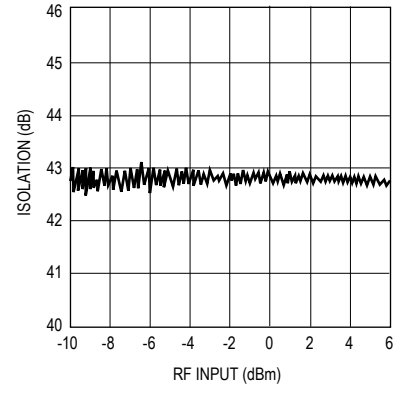


Figure 8. Isolation vs. P_{in} , $V_d = 3V$.

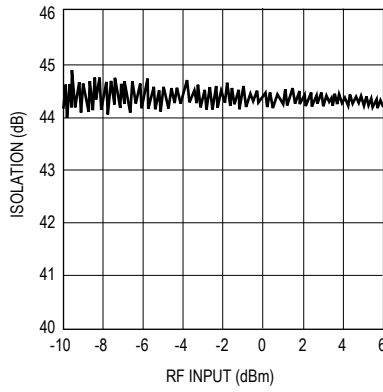


Figure 9. Isolation vs. P_{in} , $V_d = 5V$.

MGA-565P8 Typical Performance Curves ($R_{bias} = 0\Omega$, temperature variation)

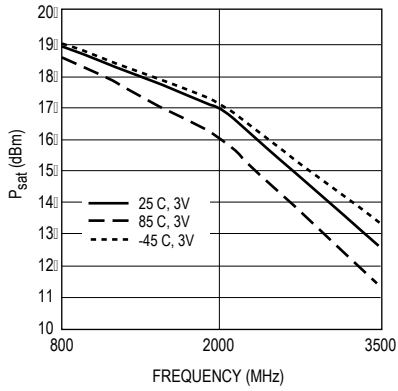


Figure 10. P_{sat} vs. Frequency. □
($P_{in} = 0$ dBm, $V_d = 3$ V)

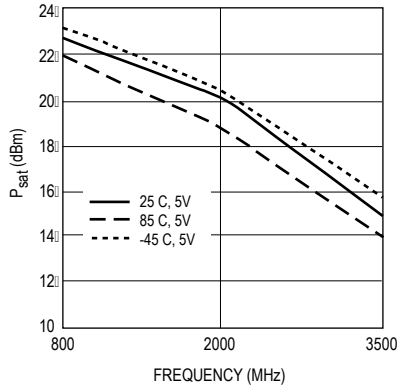


Figure 11. P_{sat} vs. Frequency. □
($P_{in} = 0$ dBm, $V_d = 5$ V)

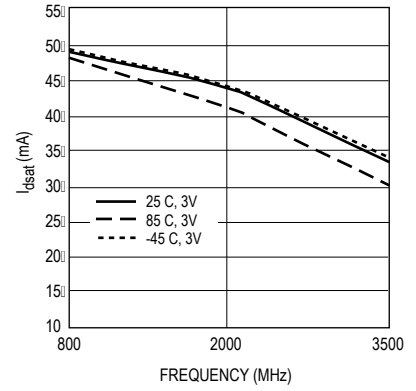


Figure 12. I_{dsat} vs. Frequency. □
($P_{in} = 0$ dBm, $V_d = 3$ V)

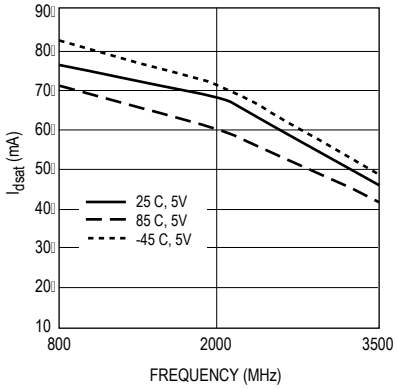


Figure 13. I_{dsat} vs. Frequency. □
($P_{in} = 0$ dBm, $V_d = 5$ V)

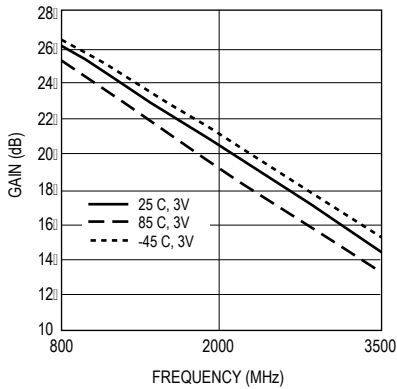


Figure 14. Gain vs. Frequency. □
($P_{in} = -10$ dBm, $V_d = 3$ V)

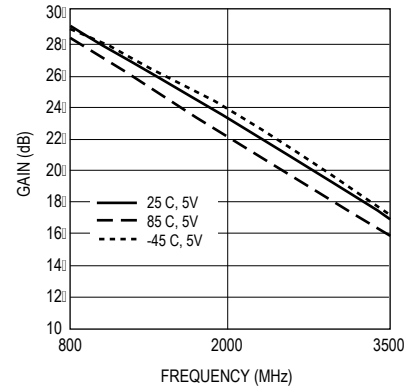


Figure 15. Gain vs. Frequency. □
($P_{in} = -10$ dBm, $V_d = 5$ V)

MGA-565P8 Typical Performance Curves ($R_{bias} = 0\Omega$, temperature variation), continued

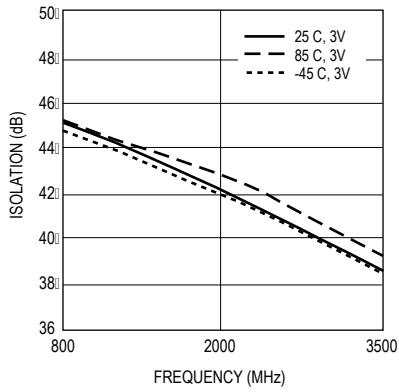


Figure 16. Isolation vs. Frequency. □
($P_{in} = -10$ dBm, $V_d = 3$ V)

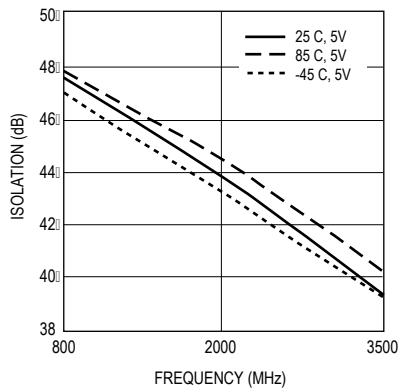


Figure 17. Isolation vs. Frequency. □
($P_{in} = -10$ dBm, $V_d = 5$ V)

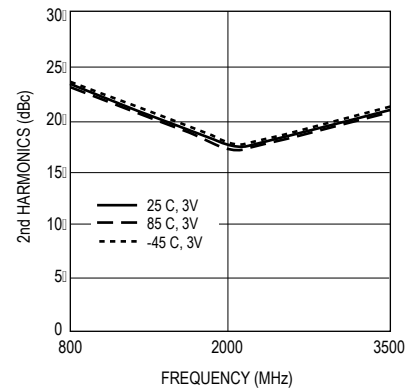


Figure 18. Second Harmonics vs. Frequency.
($P_{in} = 0$ dBm, $V_d = 3$ V)

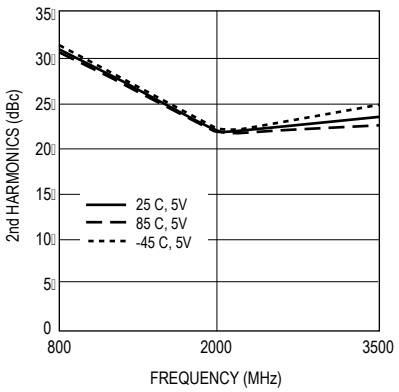


Figure 19. Second Harmonics vs. Frequency. □
($P_{in} = 0$ dBm, $V_d = 5$ V)

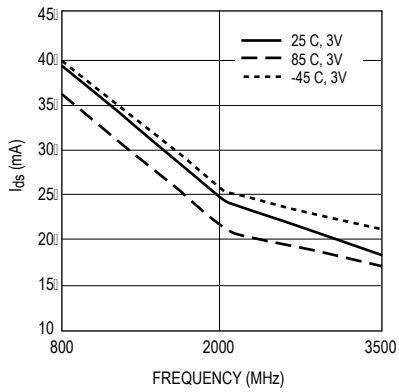


Figure 20. I_{ds} vs. Frequency. □
($P_{in} = -10$ dBm, $V_d = 3$ V)

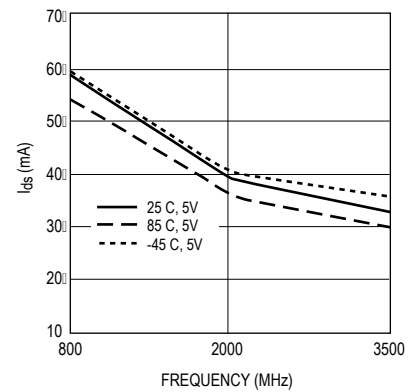


Figure 21. I_{ds} vs. Frequency. □
($P_{in} = -10$ dBm, $V_d = 5$ V)

MGA-565P8 Typical Performance Curves (at 25°C, 2 GHz, unless specified otherwise)

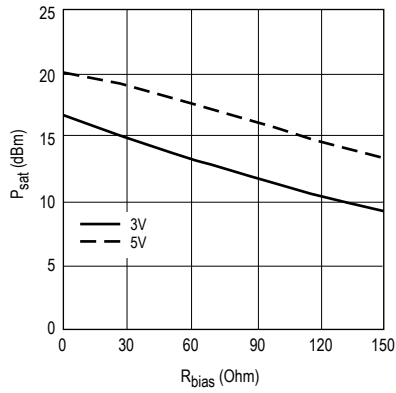


Figure 22. P_{sat} vs. R_{bias}.
P_{in} = 0 dBm for V_d = 3V and 5V.

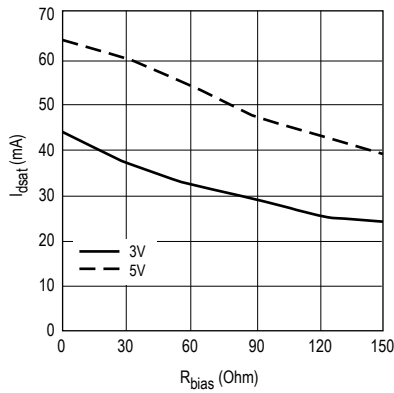


Figure 23. I_{dsat} vs. R_{bias}.
P_{in} = 0 dBm for V_d = 3V and 5V.

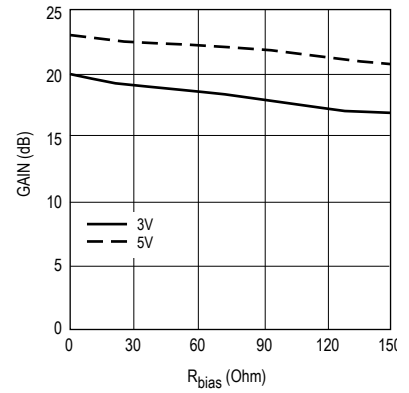


Figure 24. Gain vs. R_{bias}.
P_{in} = -10 dBm for V_d = 3V and 5V.

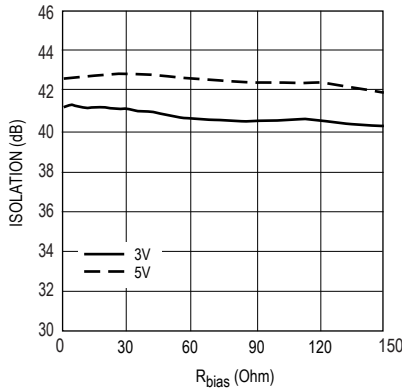


Figure 25. Isolation vs. R_{bias}.
P_{in} = -10 dBm for V_d = 3V and 5V.

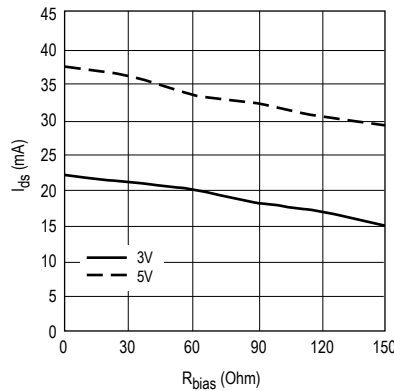


Figure 26. I_{ds} vs. R_{bias}.
P_{in} = -10 dBm for V_d = 3V and 5V.

MGA-565P8 Typical Scattering Parameters (at 25°C, $V_d = 5V$, $I_d = 35\text{ mA}$, $R_{bias} = 0\Omega$)

| Freq. GHz | S_{11} | | | S_{21} | | | S_{12} | | | S_{22} | | K |
|--------------|----------|--------|------|----------|--------|-------|----------|--------|------|----------|------|---|
| | Mag. | Ang. | dB | Mag. | Ang. | dB | Mag. | Ang. | Mag. | Ang. | | |
| 0.1 | 0.48 | -82.9 | 33.7 | 48.51 | 20.3 | -66.0 | 0.001 | 96.5 | 0.46 | -27.5 | 12.7 | |
| 0.2 | 0.19 | -136.9 | 33.9 | 49.83 | -21.5 | -60.1 | 0.001 | 86.2 | 0.43 | -34.8 | 8.1 | |
| 0.3 | 0.08 | 127.4 | 33.5 | 47.25 | -48.8 | -56.0 | 0.002 | 61.1 | 0.40 | -49.9 | 5.6 | |
| 0.4 | 0.14 | 54.5 | 32.3 | 41.22 | -70.5 | -53.1 | 0.002 | 39.3 | 0.38 | -61.2 | 4.6 | |
| 0.5 | 0.20 | 23.2 | 32.2 | 40.90 | -90.8 | -52.6 | 0.002 | 26.6 | 0.36 | -77.0 | 4.3 | |
| 0.6 | 0.25 | 0.2 | 31.5 | 37.47 | -109.9 | -51.6 | 0.003 | 13.3 | 0.34 | -89.5 | 4.1 | |
| 0.7 | 0.29 | -18.7 | 30.8 | 34.58 | -127.1 | -50.6 | 0.003 | 1.3 | 0.33 | -101.8 | 4.0 | |
| 0.8 | 0.33 | -36.0 | 30.1 | 32.04 | -143.8 | -49.5 | 0.003 | -9.5 | 0.32 | -114.5 | 3.7 | |
| 0.9 | 0.36 | -54.3 | 29.3 | 29.32 | -161.1 | -48.0 | 0.004 | -25.4 | 0.31 | -129.7 | 3.3 | |
| 1.0 | 0.36 | -71.0 | 28.4 | 26.32 | -176.0 | -48.1 | 0.004 | -44.9 | 0.27 | -141.3 | 3.9 | |
| 1.1 | 0.36 | -85.0 | 27.7 | 24.18 | 170.1 | -48.6 | 0.004 | -56.7 | 0.25 | -149.8 | 4.5 | |
| 1.2 | 0.37 | -98.1 | 27.1 | 22.60 | 156.4 | -48.7 | 0.004 | -66.7 | 0.24 | -159.4 | 4.9 | |
| 1.3 | 0.37 | -111.5 | 26.4 | 21.01 | 142.3 | -48.7 | 0.004 | -75.9 | 0.24 | -169.0 | 5.2 | |
| 1.4 | 0.37 | -124.1 | 25.8 | 19.56 | 129.1 | -48.7 | 0.004 | -85.4 | 0.23 | -178.8 | 5.6 | |
| 1.5 | 0.38 | -135.9 | 25.3 | 18.36 | 116.2 | -48.6 | 0.004 | -94.0 | 0.22 | 171.5 | 6.0 | |
| 1.6 | 0.38 | -148.7 | 24.8 | 17.36 | 102.6 | -48.5 | 0.004 | -102.9 | 0.22 | 161.7 | 6.2 | |
| 1.7 | 0.38 | -160.8 | 24.2 | 16.26 | 89.5 | -48.5 | 0.004 | -111.9 | 0.21 | 151.9 | 6.6 | |
| 1.8 | 0.38 | -172.4 | 23.7 | 15.28 | 76.8 | -48.4 | 0.004 | -120.6 | 0.21 | 142.2 | 7.0 | |
| 1.9 | 0.38 | 176.3 | 23.2 | 14.43 | 64.4 | -48.3 | 0.004 | -129.1 | 0.20 | 132.2 | 7.4 | |
| 2.0 | 0.38 | 165.0 | 22.8 | 13.73 | 51.9 | -48.3 | 0.004 | -137.0 | 0.20 | 122.5 | 7.7 | |
| 2.1 | 0.37 | 153.7 | 22.3 | 12.99 | 39.3 | -48.1 | 0.004 | -143.4 | 0.19 | 113.1 | 8.1 | |
| 2.2 | 0.37 | 143.3 | 21.8 | 12.33 | 27.3 | -46.8 | 0.005 | -151.2 | 0.19 | 105.0 | 7.4 | |
| 2.3 | 0.37 | 131.1 | 21.5 | 11.86 | 15.1 | -47.0 | 0.004 | -168.4 | 0.19 | 93.0 | 7.8 | |
| 2.4 | 0.37 | 119.5 | 21.1 | 11.31 | 2.6 | -47.5 | 0.004 | -177.2 | 0.19 | 82.3 | 8.7 | |
| 2.5 | 0.36 | 108.2 | 20.7 | 10.80 | -9.6 | -47.5 | 0.004 | 174.1 | 0.18 | 71.7 | 9.2 | |
| 2.6 | 0.36 | 96.8 | 20.3 | 10.33 | -21.5 | -47.4 | 0.004 | 165.1 | 0.18 | 61.5 | 9.5 | |
| 2.7 | 0.35 | 85.6 | 19.9 | 9.91 | -33.7 | -47.4 | 0.004 | 155.8 | 0.18 | 51.0 | 10.0 | |
| 2.8 | 0.34 | 74.0 | 19.6 | 9.50 | -45.9 | -47.3 | 0.004 | 144.5 | 0.17 | 40.0 | 10.4 | |
| 2.9 | 0.34 | 62.5 | 19.2 | 9.13 | -58.1 | -47.5 | 0.004 | 131.2 | 0.17 | 28.7 | 11.1 | |
| 3.0 | 0.32 | 51.1 | 18.8 | 8.70 | -70.3 | -49.6 | 0.003 | 112.5 | 0.16 | 16.0 | 15.2 | |
| 3.1 | 0.32 | 43.0 | 18.4 | 8.33 | -81.6 | -50.7 | 0.003 | 131.5 | 0.16 | 8.4 | 18.0 | |
| 3.2 | 0.32 | 31.4 | 18.1 | 8.08 | -93.5 | -49.1 | 0.004 | 123.9 | 0.16 | -0.7 | 15.4 | |
| 3.3 | 0.31 | 19.7 | 17.8 | 7.78 | -105.6 | -48.8 | 0.004 | 113.8 | 0.16 | -11.8 | 15.5 | |
| 3.4 | 0.30 | 8.1 | 17.5 | 7.49 | -117.6 | -48.9 | 0.004 | 105.4 | 0.16 | -21.8 | 16.4 | |
| 3.5 | 0.30 | -3.7 | 17.2 | 7.22 | -129.7 | -48.8 | 0.004 | 97.3 | 0.16 | -31.9 | 16.8 | |
| 3.6 | 0.29 | -16.1 | 16.8 | 6.93 | -142.1 | -49.3 | 0.003 | 87.8 | 0.17 | -42.7 | 18.8 | |
| 3.7 | 0.27 | -29.6 | 16.4 | 6.61 | -153.3 | -49.7 | 0.003 | 93.0 | 0.16 | -68.1 | 20.8 | |
| 3.8 | 0.25 | -43.8 | 16.1 | 6.37 | -165.9 | -49.3 | 0.003 | 87.1 | 0.14 | -70.2 | 21.0 | |
| 3.9 | 0.22 | -59.0 | 15.5 | 5.96 | -178.3 | -48.7 | 0.004 | 90.2 | 0.13 | -77.6 | 21.5 | |
| 4.0 | 0.14 | -64.5 | 14.7 | 5.44 | 171.9 | -45.6 | 0.005 | 91.4 | 0.14 | -84.1 | 16.9 | |
| 4.1 | 0.16 | -41.6 | 14.6 | 5.37 | 165.1 | -43.9 | 0.006 | 68.4 | 0.15 | -95.7 | 13.8 | |
| 4.2 | 0.22 | -56.0 | 14.8 | 5.50 | 153.7 | -43.7 | 0.007 | 42.7 | 0.15 | -111.2 | 12.9 | |
| 4.3 | 0.23 | -73.2 | 14.7 | 5.42 | 141.0 | -44.0 | 0.006 | 19.5 | 0.15 | -124.9 | 13.6 | |
| 4.4 | 0.22 | -87.9 | 14.4 | 5.26 | 128.9 | -44.3 | 0.006 | 7.6 | 0.15 | -137.1 | 14.5 | |
| 4.5 | 0.21 | -99.6 | 14.1 | 5.06 | 117.2 | -45.1 | 0.006 | -21.7 | 0.14 | -153.5 | 16.5 | |
| 4.6 | 0.20 | -110.4 | 13.7 | 4.86 | 106.0 | -47.2 | 0.004 | -55.1 | 0.13 | -168.4 | 22.2 | |
| 4.7 | 0.19 | -111.2 | 13.6 | 4.77 | 96.6 | -48.8 | 0.004 | -176.2 | 0.09 | -170.7 | 27.6 | |
| 4.8 | 0.23 | -127.2 | 13.6 | 4.76 | 83.4 | -44.0 | 0.006 | 32.8 | 0.12 | -175.4 | 15.6 | |
| 4.9 | 0.22 | -140.4 | 13.2 | 4.59 | 72.3 | -47.0 | 0.004 | 5.6 | 0.11 | 170.3 | 22.9 | |
| 5.0 | 0.21 | -153.3 | 13.0 | 4.48 | 60.8 | -46.4 | 0.005 | -11.0 | 0.11 | 160.7 | 22.1 | |
| 5.1 | 0.21 | -165.3 | 12.8 | 4.37 | 49.3 | -46.9 | 0.005 | -22.0 | 0.11 | 152.2 | 24.0 | |
| 5.2 | 0.20 | -177.2 | 12.6 | 4.25 | 37.7 | -47.5 | 0.004 | -28.1 | 0.11 | 142.3 | 26.3 | |
| 5.3 | 0.20 | 170.5 | 12.3 | 4.14 | 26.2 | -47.8 | 0.004 | -30.1 | 0.11 | 132.3 | 28.3 | |
| 5.4 | 0.19 | 158.7 | 12.1 | 4.02 | 14.7 | -47.4 | 0.004 | -25.1 | 0.12 | 124.4 | 27.7 | |
| 5.5 | 0.19 | 146.7 | 11.8 | 3.90 | 3.4 | -44.5 | 0.006 | -27.6 | 0.13 | 113.5 | 20.3 | |
| 5.6 | 0.18 | 135.4 | 11.6 | 3.79 | -8.0 | -42.6 | 0.007 | -47.1 | 0.13 | 100.8 | 16.8 | |
| 5.7 | 0.18 | 123.7 | 11.3 | 3.68 | -19.4 | -42.5 | 0.008 | -66.0 | 0.14 | 88.9 | 17.1 | |
| 5.8 | 0.18 | 111.4 | 11.0 | 3.56 | -30.5 | -43.2 | 0.007 | -80.4 | 0.14 | 77.2 | 19.3 | |
| 5.9 | 0.18 | 100.4 | 10.8 | 3.45 | -41.7 | -44.2 | 0.006 | -85.9 | 0.14 | 70.6 | 22.1 | |
| 6.0 | 0.18 | 88.9 | 10.4 | 3.32 | -52.7 | -44.1 | 0.006 | -88.2 | 0.16 | 62.3 | 22.6 | |

MGA-565P8 Typical Scattering Parameters (at 25°C, $V_d = 3V$, $I_d = 20\text{ mA}$, $R_{bias} = 0\Omega$)

| Freq. GHz | S_{11} | | | S_{21} | | | S_{12} | | | S_{22} | | K |
|--------------|----------|--------|------|----------|--------|-------|----------|--------|------|----------|------|---|
| | Mag. | Ang. | dB | Mag. | Ang. | dB | Mag. | Ang. | Mag. | Ang. | | |
| 0.1 | 0.53 | -75.3 | 30.8 | 34.87 | 27.3 | -62.9 | 0.001 | 105.7 | 0.48 | -27.5 | 11.2 | |
| 0.2 | 0.17 | -116.2 | 31.1 | 35.82 | -21.4 | -55.2 | 0.002 | 89.1 | 0.45 | -34.4 | 6.3 | |
| 0.3 | 0.00 | 162.6 | 30.6 | 34.07 | -47.6 | -52.3 | 0.002 | 61.2 | 0.43 | -53.8 | 5.0 | |
| 0.4 | 0.12 | 26.9 | 29.4 | 29.48 | -71.1 | -50.5 | 0.003 | 36.9 | 0.40 | -72.6 | 4.7 | |
| 0.5 | 0.18 | 3.8 | 29.4 | 29.43 | -89.6 | -48.9 | 0.004 | 25.1 | 0.38 | -83.5 | 3.9 | |
| 0.6 | 0.24 | -13.8 | 28.6 | 26.95 | -108.7 | -47.9 | 0.004 | 10.7 | 0.36 | -97.1 | 3.8 | |
| 0.7 | 0.28 | -30.1 | 27.9 | 24.85 | -126.0 | -47.0 | 0.004 | -3.0 | 0.34 | -111.3 | 3.7 | |
| 0.8 | 0.31 | -45.9 | 27.2 | 22.90 | -142.7 | -46.2 | 0.005 | -16.6 | 0.32 | -125.3 | 3.6 | |
| 0.9 | 0.33 | -61.5 | 26.4 | 20.95 | -159.2 | -45.7 | 0.005 | -30.3 | 0.30 | -138.5 | 3.7 | |
| 1.0 | 0.34 | -75.5 | 25.6 | 19.15 | -174.2 | -45.4 | 0.005 | -43.6 | 0.27 | -150.8 | 4.0 | |
| 1.1 | 0.35 | -89.0 | 24.9 | 17.63 | 171.4 | -45.3 | 0.005 | -55.7 | 0.25 | -162.2 | 4.3 | |
| 1.2 | 0.36 | -101.9 | 24.3 | 16.46 | 157.5 | -45.2 | 0.005 | -67.1 | 0.24 | -173.9 | 4.5 | |
| 1.3 | 0.37 | -114.8 | 23.7 | 15.30 | 143.4 | -45.2 | 0.005 | -77.7 | 0.22 | -175.0 | 4.9 | |
| 1.4 | 0.37 | -127.0 | 23.1 | 14.25 | 130.1 | -45.2 | 0.006 | -88.0 | 0.21 | 164.8 | 5.2 | |
| 1.5 | 0.37 | -138.4 | 22.5 | 13.38 | 117.2 | -45.1 | 0.006 | -97.1 | 0.19 | 155.1 | 5.6 | |
| 1.6 | 0.38 | -150.8 | 22.1 | 12.67 | 103.7 | -45.0 | 0.006 | -106.8 | 0.19 | 144.7 | 5.8 | |
| 1.7 | 0.37 | -162.4 | 21.5 | 11.89 | 90.4 | -45.0 | 0.006 | -116.1 | 0.18 | 134.0 | 6.2 | |
| 1.8 | 0.37 | -173.8 | 21.0 | 11.20 | 77.8 | -44.9 | 0.006 | -125.0 | 0.16 | 124.2 | 6.6 | |
| 1.9 | 0.37 | 175.2 | 20.5 | 10.59 | 65.3 | -44.9 | 0.006 | -134.0 | 0.16 | 114.5 | 6.9 | |
| 2.0 | 0.37 | 164.3 | 20.1 | 10.09 | 52.7 | -44.8 | 0.006 | -142.2 | 0.15 | 104.7 | 7.2 | |
| 2.1 | 0.37 | 153.2 | 19.6 | 9.57 | 40.0 | -44.7 | 0.006 | -150.0 | 0.14 | 94.9 | 7.6 | |
| 2.2 | 0.37 | 142.9 | 19.1 | 9.05 | 27.9 | -43.8 | 0.006 | -157.7 | 0.14 | 87.3 | 7.3 | |
| 2.3 | 0.37 | 131.2 | 18.8 | 8.75 | 15.6 | -43.8 | 0.006 | -172.5 | 0.13 | 76.1 | 7.5 | |
| 2.4 | 0.36 | 119.9 | 18.4 | 8.35 | 3.1 | -44.1 | 0.006 | 178.3 | 0.12 | 64.7 | 8.2 | |
| 2.5 | 0.35 | 108.8 | 18.1 | 7.99 | -9.2 | -44.2 | 0.006 | 169.9 | 0.12 | 53.6 | 8.7 | |
| 2.6 | 0.35 | 97.8 | 17.7 | 7.65 | -21.2 | -44.1 | 0.006 | 161.0 | 0.11 | 43.9 | 9.0 | |
| 2.7 | 0.35 | 86.8 | 17.3 | 7.34 | -33.5 | -44.0 | 0.006 | 151.0 | 0.11 | 34.0 | 9.3 | |
| 2.8 | 0.34 | 75.7 | 17.0 | 7.04 | -45.8 | -43.8 | 0.006 | 140.5 | 0.10 | 23.2 | 9.7 | |
| 2.9 | 0.33 | 64.4 | 16.6 | 6.76 | -58.0 | -43.9 | 0.006 | 128.6 | 0.10 | 12.0 | 10.2 | |
| 3.0 | 0.32 | 53.6 | 16.2 | 6.45 | -70.2 | -45.1 | 0.006 | 115.1 | 0.10 | -0.7 | 12.5 | |
| 3.1 | 0.32 | 44.9 | 15.9 | 6.20 | -81.7 | -45.5 | 0.005 | 119.6 | 0.09 | -8.0 | 13.5 | |
| 3.2 | 0.32 | 33.7 | 15.6 | 6.00 | -93.8 | -44.6 | 0.006 | 111.0 | 0.09 | -15.5 | 12.6 | |
| 3.3 | 0.31 | 22.3 | 15.2 | 5.78 | -106.0 | -44.4 | 0.006 | 101.1 | 0.09 | -26.4 | 12.9 | |
| 3.4 | 0.31 | 11.3 | 14.9 | 5.56 | -118.0 | -44.5 | 0.006 | 91.5 | 0.08 | -34.8 | 13.5 | |
| 3.5 | 0.30 | -0.1 | 14.6 | 5.35 | -130.0 | -44.5 | 0.006 | 82.2 | 0.09 | -43.1 | 14.2 | |
| 3.6 | 0.29 | -11.9 | 14.2 | 5.15 | -142.1 | -45.1 | 0.006 | 72.4 | 0.10 | -54.3 | 15.8 | |
| 3.7 | 0.28 | -24.4 | 14.0 | 5.00 | -154.1 | -45.1 | 0.006 | 76.0 | 0.10 | -92.6 | 16.4 | |
| 3.8 | 0.27 | -37.4 | 13.6 | 4.79 | -166.8 | -44.5 | 0.006 | 63.6 | 0.06 | -97.0 | 16.1 | |
| 3.9 | 0.25 | -51.6 | 13.1 | 4.53 | -179.4 | -44.9 | 0.006 | 56.0 | 0.05 | -99.7 | 18.2 | |
| 4.0 | 0.20 | -66.7 | 12.5 | 4.21 | 168.6 | -45.2 | 0.006 | 58.1 | 0.05 | -100.9 | 20.6 | |
| 4.1 | 0.13 | -63.3 | 11.7 | 3.85 | 159.7 | -43.6 | 0.007 | 61.7 | 0.06 | -101.1 | 19.3 | |
| 4.2 | 0.18 | -48.6 | 11.8 | 3.87 | 152.0 | -43.5 | 0.007 | 39.9 | 0.06 | -115.6 | 18.7 | |
| 4.3 | 0.21 | -64.6 | 11.8 | 3.89 | 140.0 | -43.2 | 0.007 | 13.8 | 0.06 | -132.4 | 17.7 | |
| 4.4 | 0.22 | -80.1 | 11.6 | 3.80 | 127.7 | -43.6 | 0.007 | 2.6 | 0.06 | -143.7 | 18.9 | |
| 4.5 | 0.21 | -91.4 | 11.3 | 3.66 | 116.0 | -44.3 | 0.006 | -23.8 | 0.06 | -165.6 | 21.2 | |
| 4.6 | 0.21 | -102.3 | 10.9 | 3.52 | 104.7 | -44.2 | 0.006 | -50.6 | 0.05 | 172.5 | 22.0 | |
| 4.7 | 0.20 | -105.6 | 10.7 | 3.42 | 95.0 | -44.9 | 0.006 | -115.3 | 0.02 | 156.2 | 24.6 | |
| 4.8 | 0.24 | -120.3 | 10.6 | 3.41 | 82.1 | -44.4 | 0.006 | 4.5 | 0.04 | -175.3 | 23.0 | |
| 4.9 | 0.23 | -133.3 | 10.3 | 3.28 | 71.1 | -44.6 | 0.006 | -34.5 | 0.03 | 166.0 | 24.5 | |
| 5.0 | 0.22 | -146.0 | 10.1 | 3.20 | 59.8 | -43.8 | 0.006 | -47.7 | 0.03 | 164.1 | 23.1 | |
| 5.1 | 0.22 | -158.0 | 9.8 | 3.10 | 48.4 | -44.1 | 0.006 | -61.1 | 0.03 | 166.9 | 24.6 | |
| 5.2 | 0.22 | -170.0 | 9.6 | 3.01 | 37.0 | -44.8 | 0.006 | -72.7 | 0.03 | 162.5 | 27.4 | |
| 5.3 | 0.21 | 177.7 | 9.3 | 2.92 | 25.6 | -45.9 | 0.005 | -82.5 | 0.04 | 157.3 | 32.4 | |
| 5.4 | 0.21 | 165.5 | 9.0 | 2.82 | 14.3 | -48.1 | 0.004 | -84.1 | 0.04 | 153.6 | 43.1 | |
| 5.5 | 0.20 | 152.8 | 8.7 | 2.73 | 3.4 | -48.1 | 0.004 | -64.4 | 0.06 | 139.9 | 44.3 | |
| 5.6 | 0.20 | 142.6 | 8.5 | 2.66 | -7.4 | -44.2 | 0.006 | -70.4 | 0.06 | 125.5 | 29.2 | |
| 5.7 | 0.20 | 131.3 | 8.2 | 2.58 | -18.6 | -43.0 | 0.007 | -90.9 | 0.07 | 111.2 | 26.2 | |
| 5.8 | 0.20 | 118.6 | 8.0 | 2.50 | -29.4 | -43.7 | 0.007 | -109.0 | 0.08 | 97.5 | 29.4 | |
| 5.9 | 0.19 | 106.8 | 7.7 | 2.43 | -40.0 | -45.6 | 0.005 | -115.0 | 0.09 | 89.2 | 37.4 | |
| 6.0 | 0.19 | 94.9 | 7.5 | 2.36 | -50.3 | -46.4 | 0.005 | -106.5 | 0.12 | 73.1 | 42.2 | |


Device Models

Refer to the Avago Technologies Web Site

Ordering Information

| Part Number | No. of Devices | Container |
|---------------|----------------|----------------|
| MGA-565P8-TR1 | 3000 | 7" Reel |
| MGA-565P8-TR2 | 10000 | 13" Reel |
| MGA-565P8-BLK | 100 | antistatic bag |


2 x 2 LPCC (JEDEC DFP-N) Package Dimensions

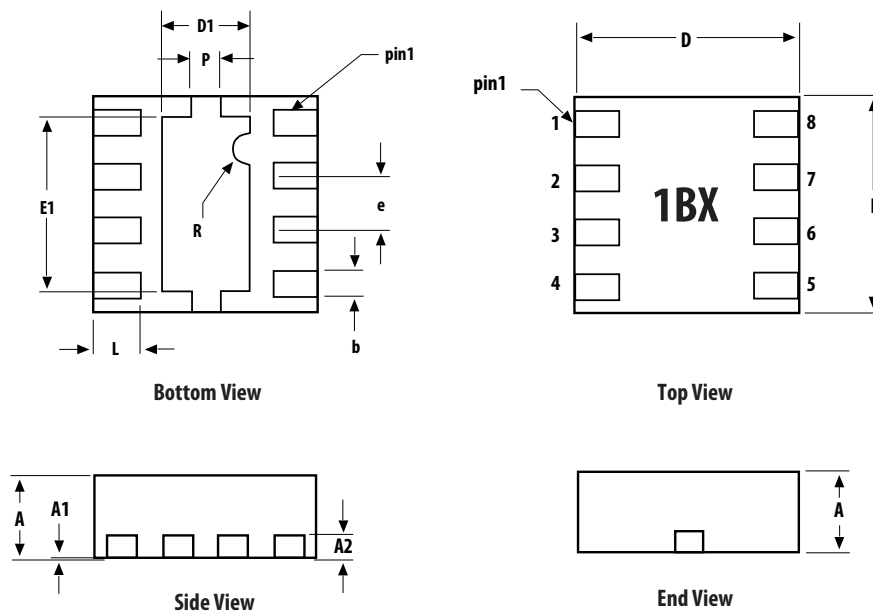


| SYMBOL | DIMENSIONS | | |
|--------|------------|-----------|-------|
| | MIN. | NOM. | MAX. |
| A | 0.70 | 0.75 | 0.80 |
| A1 | 0 | 0.02 | 0.05 |
| A2 | | 0.203 REF | |
| b | 0.225 | 0.25 | 0.275 |
| D | 1.9 | 2.0 | 2.1 |
| D1 | 0.95 | 1.00 | 1.05 |
| E | 1.9 | 2.0 | 2.1 |
| E1 | 1.55 | 1.60 | 1.65 |
| L | 0.25 | 0.30 | 0.35 |
| e | | 0.50 BSC | |
| P | 0.2 | 0.25 | 0.3 |
| L | | 0.4 REF | |

DIMENSIONS ARE IN MILLIMETERS


PCB Land Patterns and stencil Design

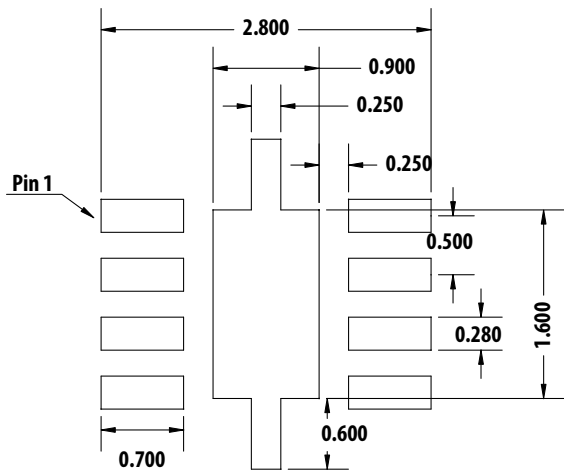

PCB Land Pattern


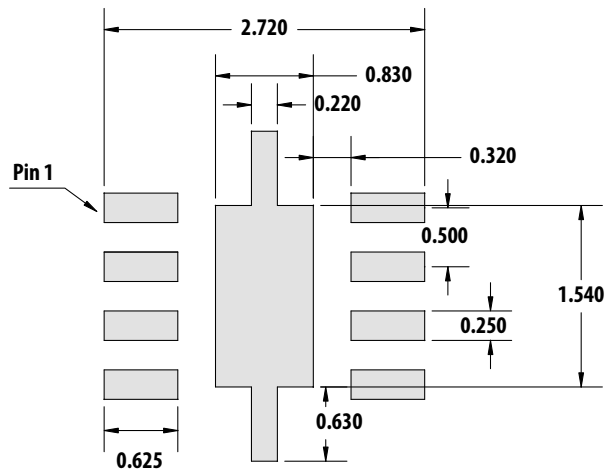


Stencil Outline Drawing

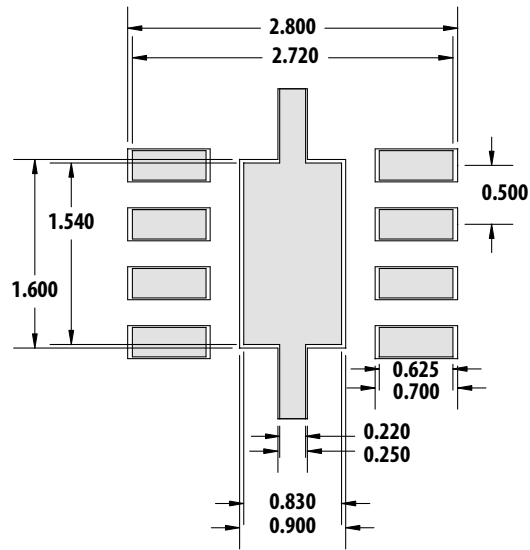


Combined PCB and Stencil Layouts

Device Orientation

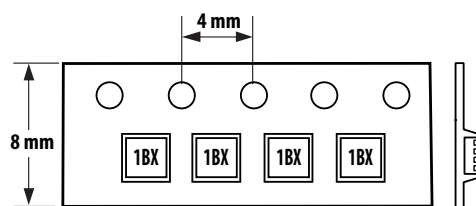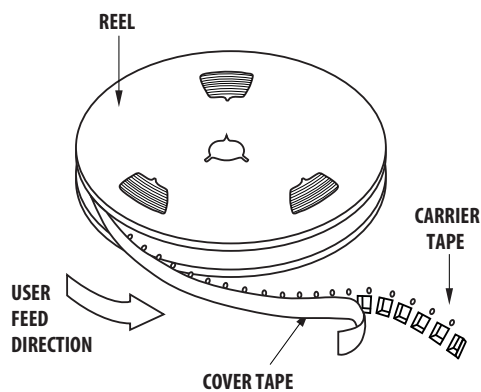

Tape Dimensions

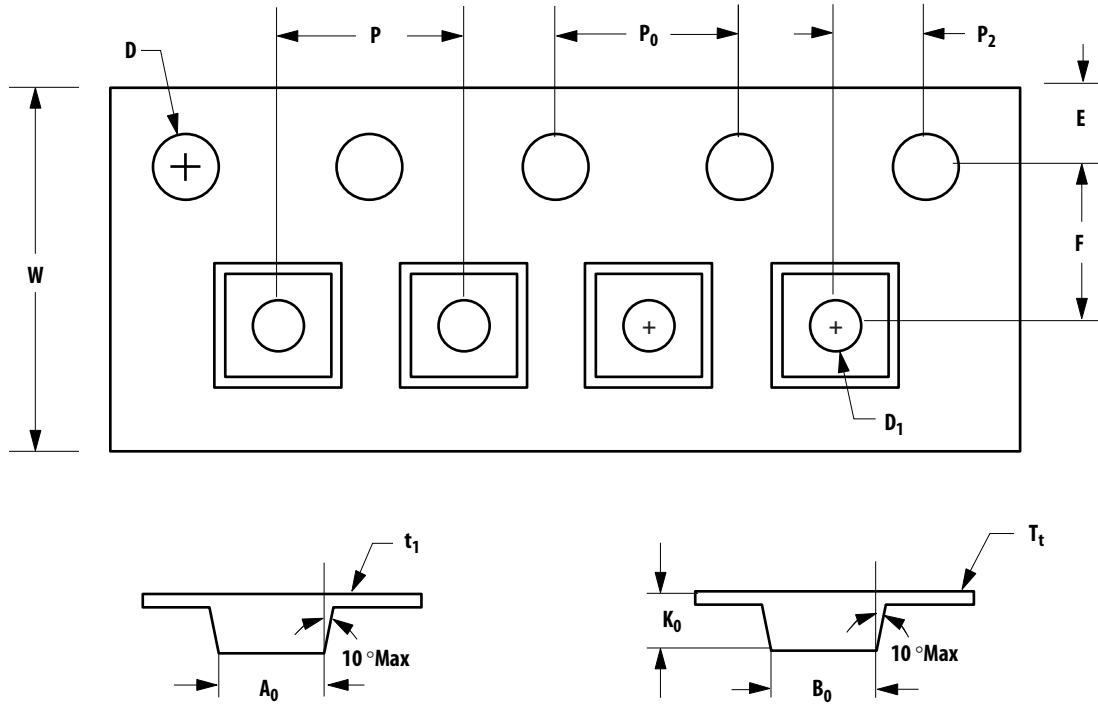

| DESCRIPTION | | SYMBOL | SIZE (mm) | SIZE (inches) |
|--------------|---|--------|--------------------------------|--|
| CAVITY | LENGTH | A_0 | 2.30 ± 0.05 | 0.091 ± 0.004 |
| | WIDTH | B_0 | 2.30 ± 0.05 | 0.091 ± 0.004 |
| | DEPTH | K_0 | 1.00 ± 0.05 | 0.039 ± 0.002 |
| | PITCH | P | 4.00 ± 0.10 | 0.157 ± 0.004 |
| | BOTTOM HOLE DIAMETER | D_1 | $1.00 + 0.25$ | $0.039 + 0.002$ |
| PERFORATION | DIAMETER | D | 1.50 ± 0.10 | 0.060 ± 0.004 |
| | PITCH | P_0 | 4.00 ± 0.10 | 0.157 ± 0.004 |
| | POSITION | E | 1.75 ± 0.10 | 0.069 ± 0.004 |
| CARRIER TAPE | WIDTH | W | $8.00 + 0.30$ $8.00 - 0.10$ | 0.315 ± 0.012 0.315 ± 0.004 |
| | THICKNESS | t_1 | 0.254 ± 0.02 | 0.010 ± 0.0008 |
| COVER TAPE | WIDTH | C | 5.4 ± 0.10 | 0.205 ± 0.004 |
| | TAPE THICKNESS | T_t | 0.062 ± 0.001 | 0.0025 ± 0.0004 |
| DISTANCE | CAVITY TO PERFORATION (WIDTH DIRECTION) | F | 3.50 ± 0.05 | 0.138 ± 0.002 |
| | CAVITY TO PERFORATION (LENGTH DIRECTION) | P_2 | 2.00 ± 0.05 | 0.079 ± 0.002 |

For product information and a complete list of distributors, please go to our web site: www.avagotech.com

Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies in the United States and other countries.
Data subject to change. Copyright © 2005-2009 Avago Technologies. All rights reserved. Obsoletes 5989-1805EN
AV02-0039EN - April 14, 2009

Avago
TECHNOLOGIES