


| REV. | REVISION | DATE |
|------|----------|------|
| | | |

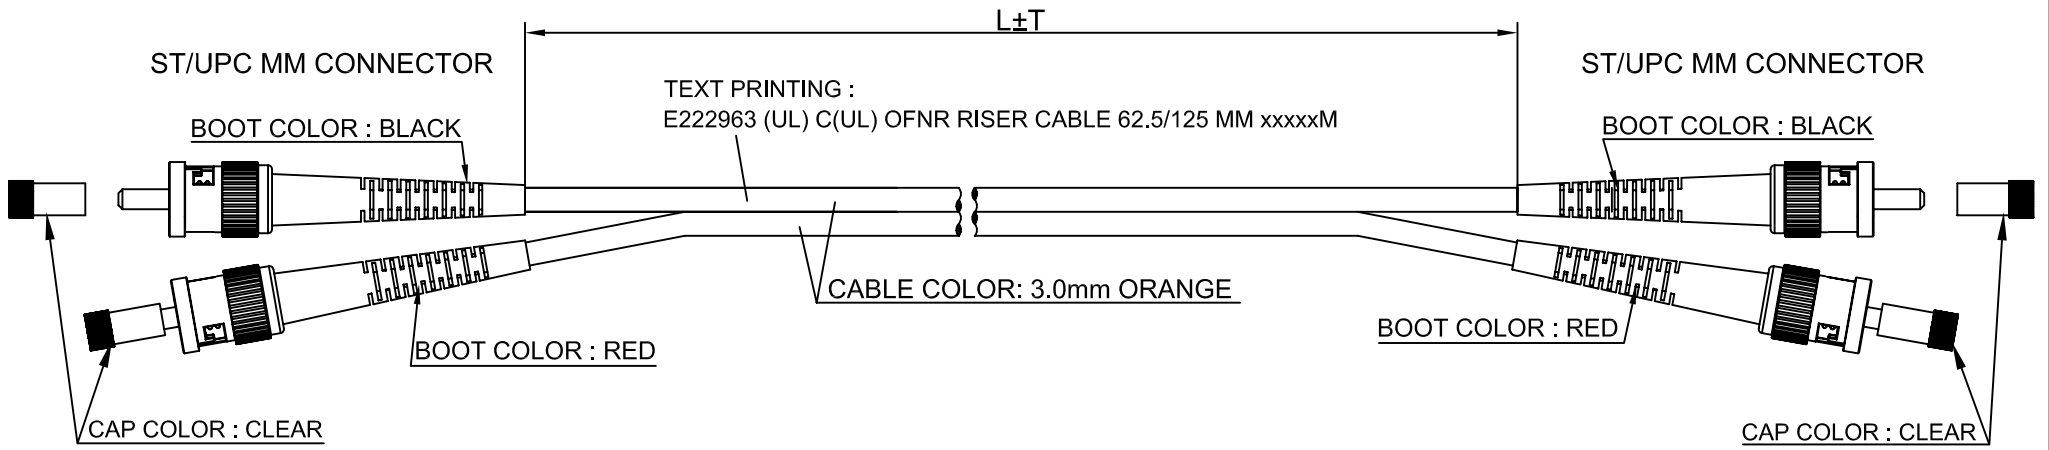

DFMM-STST-XX
 xxM ST/ST MM 62.5/125, DUPLEX RISER
 QTY. 1
www.bb-elec.com


DETAIL A

- NOTES:
1. INSERTION LOSS < 0.5dB.
 2. OPERATION TEMP: -20°C TO +60°C
 3. ORANGE PVC OUTER JACKET
 4. INDIVIDUALLY BAGGED AND LABELED, (SEE DETAIL A)

CHART

| Part No. | XX | L | T | Barcode |
|---------------|----|--------------|----------------|---------|
| DFMM-STST-10M | 10 | 32.8'(10000) | +2"/-0(+50/-0) | |
| DFMM-STST-5M | 5 | 16.4'(5000) | +2"/-0(+50/-0) | |
| DFMM-STST-3M | 3 | 9.84'(3000) | +2"/-0(+50/-0) | |
| DFMM-STST-2M | 2 | 6.56'(2000) | +2"/-0(+50/-0) | |
| DFMM-STST-1M | 1 | 3.28'(1000) | +2"/-0(+50/-0) | |

B&B Electronics manufacturing Co.

| | | | |
|---|------------------------|---|-----------|
|  | UNIT: Inches[mm] | TITLE: xxM DUPLEX 62.5/125 MULTIMODE ST/ST RISER JUMPER CABLE | |
| | DRAWN BY: A. MEDINA | DATE: 05/09/2008 | |
| CHECKED BY: | DATE: | DRAWING NO. C.D. 2379 | REV. A |
| APPROVED BY: | DATE: | REF: | |
| P.O. NO.: | DATE: | PART NO. DFMM-STST-XX | |