




# JIB & RMB SERIES

WELCOME FOR OEMs ORDER

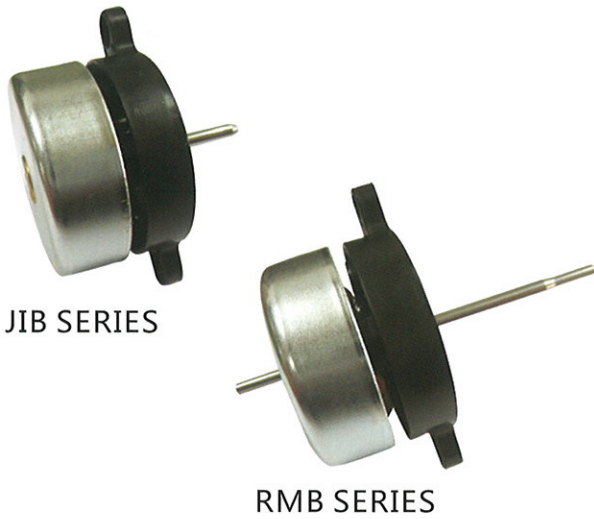

JIB SERIES

RMB SERIES

**SIZE:**

ø38mmx23mm (ø1.49"x0.90")

**CONSTRUCTION :**

- Plastic base
- Metal rotor

**OPERATING TEMPERATURE :**

Ball bearing - 30°C to + 75°C

**INSULATION RESISTANCE :**

10 meg Ohm min. at 500 VDC  
(between frame and terminal)

**DIELECTRIC STRENGTH :**

5 mA max. at 500 VAC 60Hz one minute  
(between frame and terminal)

**WEIGHT :**

60 grams

## Specifications

Specifications are subject to change without notice

| MODEL NO. | BEARING | RATED   | OPERATING | RATED   | RATED INPUT | SPEED  |
|-----------|---------|---------|-----------|---------|-------------|--------|
|           |         | VOLTAGE | VOLTAGE   | CURRENT | POWER       |        |
|           |         | VDC     | RANGE     | A       | W           | R.P.M. |
|           |         |         | V         |         |             |        |
| JIB0412LL | BALL    | 12      | 10.2~13.8 | 0.11    | 1.32        | 4900   |
| JIB0412LM | BALL    | 12      | 10.2~13.8 | 0.12    | 1.44        | 5700   |
| JIB0412LH | BALL    | 12      | 10.2~13.8 | 0.14    | 1.68        | 6400   |
| JIB0412RL | BALL    | 12      | 10.2~13.8 | 0.11    | 1.32        | 4900   |
| JIB0412RM | BALL    | 12      | 10.2~13.8 | 0.12    | 1.44        | 5700   |
| JIB0412RH | BALL    | 12      | 10.2~13.8 | 0.14    | 1.68        | 6400   |
| JIB0424LL | BALL    | 24      | 20.4~27.6 | 0.10    | 2.40        | 4900   |
| JIB0424LM | BALL    | 24      | 20.4~27.6 | 0.12    | 2.88        | 5700   |
| JIB0424LH | BALL    | 24      | 20.4~27.6 | 0.10    | 2.40        | 6200   |
| JIB0424RL | BALL    | 24      | 20.4~27.6 | 0.10    | 2.40        | 4900   |
| JIB0424RM | BALL    | 24      | 20.4~27.6 | 0.12    | 2.88        | 5700   |
| JIB0424RH | BALL    | 24      | 20.4~27.6 | 0.13    | 3.12        | 6400   |
| RMB0112B  | BALL    | 12      | 10.2~13.8 | 0.08    | 0.96        | 4000   |

