


PART NAME	NON-METALLIC ENCLOSURE (STYLE D)	PART No.	NBD-10456 & NBD-10476 & NBD-15456
-----------	----------------------------------	----------	-----------------------------------

MATERIAL:
INDOOR VERSION
 SOLID BODY & COVER _____ ABS/PC BLENDED PLASTIC
 UL94-5VB FLAMMABILITY RATING
 CLEAR COVER _____ POLYCARBONATE PLASTIC
 UL94V-0 FLAMMABILITY RATING
 UV STABILIZED
OUTDOOR VERSION
 SOLID BODY & COVER _____ PBT/PC BLENDED PLASTIC
 UL94-5VA FLAMMABILITY RATING
 UV STABILIZED

FINISH:
 BODY _____ LIGHT GRAY
 COVER _____ LIGHT GRAY OR CLEAR

COVER INCLUDES GRAY POLY-URETHANE GASKET.
 AIR AND MOISTURE VENTS, STAINLESS STEEL LOCKING HASP, PANEL MOUNTING RAILS, GALVANIZED STEEL INNER PANEL AND STAINLESS STEEL WALL MOUNTING BRACKETS ARE NOT INCLUDED, BUT CAN BE PURCHASED SEPARATELY.

INDUSTRY STANDARDS:
INDOOR VERSION
 UL508 TYPE 1, 2, 4, 4X INDOOR, 12 & 13
 NEMA TYPE 1, 2, 4, 4X, 12 & 13
 IEC529-IP65
OUTDOOR VERSION
 UL508 TYPE 1, 2, 4, 4X, 12 & 13
 NEMA TYPE 1, 2, 4, 4X, 12 & 13
 IEC529-IP65

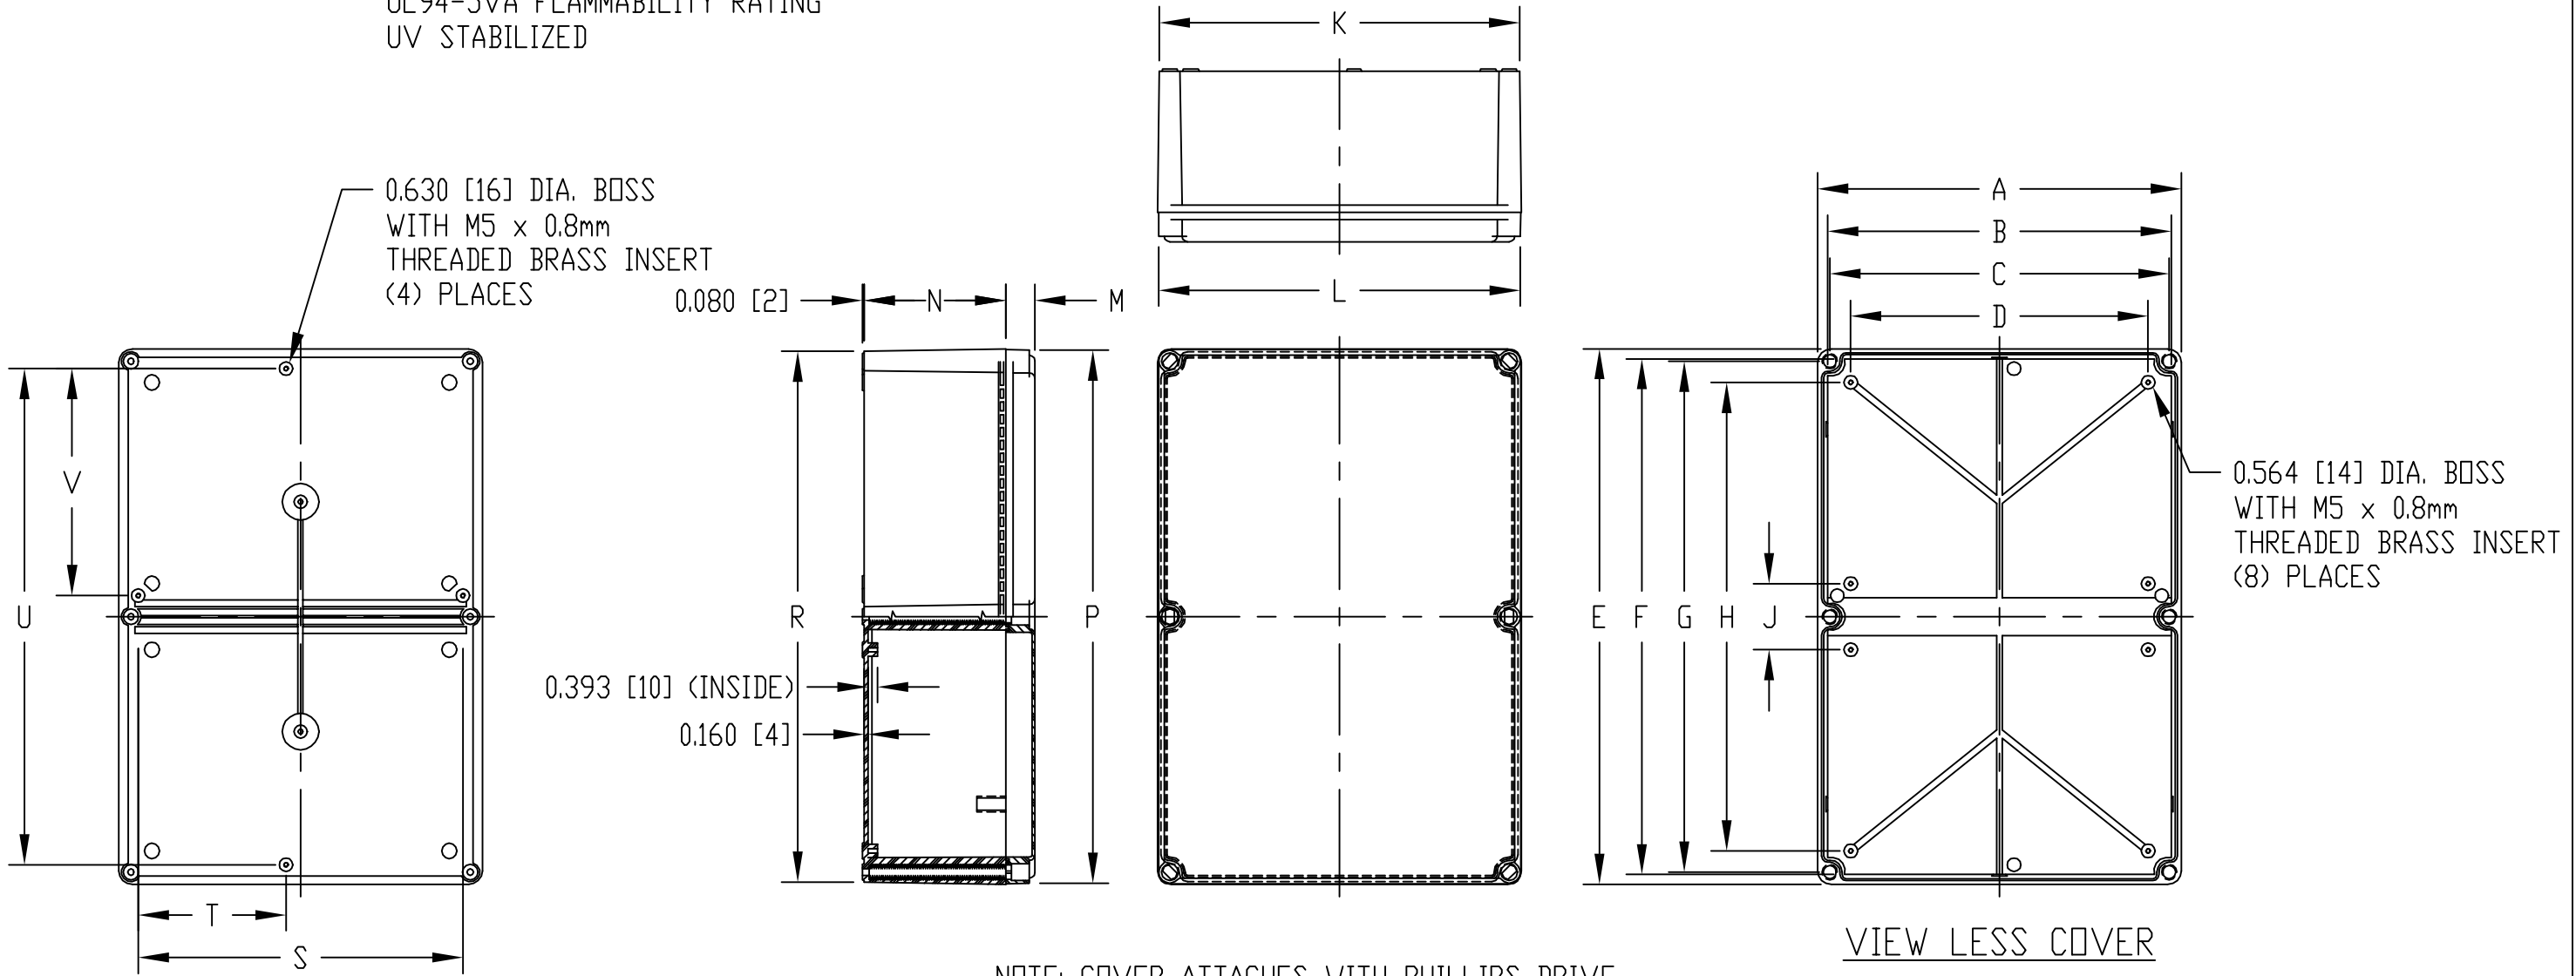

NOTE: COVER ATTACHES WITH PHILLIPS DRIVE NON-METALLIC SCREWS. (NOT SHOWN)

NOTE: ALL DIMENSIONS HAVE ±0.039 [±1] TOLERANCE UNLESS OTHERWISE SPECIFIED

DIMENSIONS = INCHES [MILLIMETERS]

INDOOR VERSION		OUTDOOR VERSION	DIMENSIONS																		
PART NO.		PART NO.																			
SOLID COVER	CLEAR COVER	SOLID COVER	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	S	T	U	V
NBD-10456	NBD-10476	NBD-15456	14.975 [380]	14.170 [360]	13.984 [355]	12.252 [311]	22.085 [561]	21.260 [540]	21.062 [535]	19.313 [491]	2.724 [69]	14.838 [377]	14.890 [378]	1.210 [31]	5.825 [148]	21.958 [558]	21.870 [555]	13.378 [340]	6.093 [155]	20.455 [520]	9.360 [238]