


# Ferrule Type, Fast-Acting Fuses

## For 13/32" x 1-1/2" (10.3mm x 38.1mm)


**BAN**



**Dimensional Data**

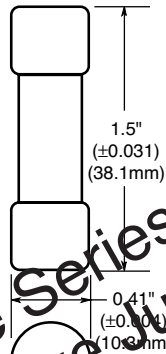

**Time-Current Characteristic Curves—Average Melt**  
(Full Size Curves Available)

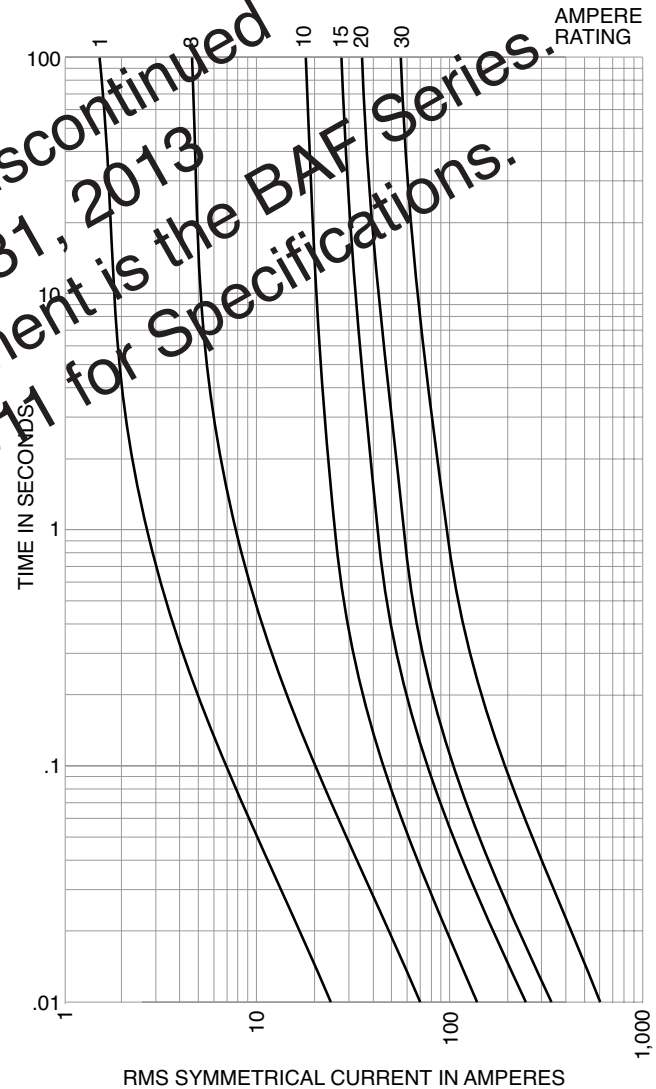

**Catalog Symbol:** BAN  
13/32" x 1-1/2" (10.3mm x 38.1mm) 5AG  
**Ferrule Type, Fast-Acting**

1-30A  
250Vac

**Body Material:** FIBRE-TYPE  
**Ferrule Material:** BRONZE  
**Ferrule Plating:** NICKEL  
**Interrupting Ratings: Military Tested**  
35A (1.0 - 3.5A)  
100A (3.6 - 15A)  
200A (10.1 - 15A)  
750A (15.1 - 30A)

- Fibre; formerly 5AB.
- Mounts in Buss BM series fuseblocks.

**Electrical Ratings (Catalog Symbol and Amperes)**


250Vac			
BAN-1	BAN-5	BAN-10	BAN-25
BAN-2	BAN-6	BAN-12	BAN-30
BAN-3	BAN-7	BAN-15	—
BAN-4	BAN-8	BAN-20	—

**Carton Quantity and Weight**

Ampere Ratings	Carton Qty	Weight*	
		Lbs.	Kg.
1-30	100	1.4	635

\*Weight per carton.

CE CE logo denotes compliance with European Union Low Voltage Directive (50-1000Vac, 75-1500Vdc). Refer to Data Sheet: 8002 or contact Bussmann Application Engineering at 636-527-1270 for more information.



Recommended fuseblocks/fuseholders for 13/32" x 1-1/2" fuses  
See Data Sheets listed below

- Open fuseblocks - 1104, 2104
- Finger-safe fuseholders - 1109, 1102, 1103, 1151
- Panel-mount fuseholders - 2114, 2113, 2108, 2112, 2109, 2140
- In-line fuseholders - 2127, 2126

The only controlled copy of this Data Sheet is the electronic read-only version located on the Bussmann Network Drive. All other copies of this Data Sheet present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information it should be tested by the user in all possible applications.