

2N5320 2N5321 NPN  
2N5322 2N5323 PNP

**COMPLEMENTARY SILICON  
SWITCHING TRANSISTORS**



**TO-39 CASE**



[www.centrasemi.com](http://www.centrasemi.com)

**DESCRIPTION:**

The CENTRAL SEMICONDUCTOR 2N5320, 2N5322 series types are complementary silicon power transistors manufactured by the epitaxial planar process, designed for amplifier and switching applications.

**MARKING: FULL PART NUMBER**

**MAXIMUM RATINGS:** ( $T_C=25^\circ\text{C}$ )

Collector-Base Voltage  
Collector-Emitter Voltage  
Collector-Emitter Voltage  
Emitter-Base Voltage  
Continuous Collector Current  
Continuous Base Current  
Power Dissipation  
Operating and Storage Junction Temperature  
Thermal Resistance  
Thermal Resistance

| SYMBOL         | 2N5320 | 2N5321      | UNITS              |
|----------------|--------|-------------|--------------------|
|                | 2N5322 | 2N5323      |                    |
| $V_{CBO}$      | 100    | 75          | V                  |
| $V_{CEV}$      | 100    | 75          | V                  |
| $V_{CEO}$      | 75     | 50          | V                  |
| $V_{EBO}$      | 6.0    | 5.0         | V                  |
| $I_C$          |        | 2.0         | A                  |
| $I_B$          |        | 1.0         | A                  |
| $P_D$          |        | 10          | W                  |
| $T_J, T_{stg}$ |        | -65 to +200 | $^\circ\text{C}$   |
| $\theta_{JA}$  |        | 175         | $^\circ\text{C/W}$ |
| $\theta_{JC}$  |        | 17.5        | $^\circ\text{C/W}$ |

**ELECTRICAL CHARACTERISTICS:** ( $T_C=25^\circ\text{C}$  unless otherwise noted)

| SYMBOL        | TEST CONDITIONS                                       | 2N5320 |        | 2N5321 |        | UNITS         |
|---------------|---|--------|--------|--------|--------|---------------|
|               |   | 2N5322 | 2N5323 | 2N5322 | 2N5323 |               |
| $I_{CBO}$     | $V_{CB}=80\text{V}$                                   | -      | 0.5    | -      | -      | $\mu\text{A}$ |
| $I_{CBO}$     | $V_{CB}=60\text{V}$                                   | -      | -      | -      | 5.0    | $\mu\text{A}$ |
| $I_{EBO}$     | $V_{EB}=5.0\text{V}$                                  | -      | 0.1    | -      | -      | $\mu\text{A}$ |
| $I_{EBO}$     | $V_{EB}=4.0\text{V}$                                  | -      | -      | -      | 0.5    | $\mu\text{A}$ |
| $BV_{CEV}$    | $I_C=100\mu\text{A}, V_{BE}=1.5\text{V}$              | 100    | -      | 75     | -      | V             |
| $BV_{CEO}$    | $I_C=10\text{mA}$                                     | 75     | -      | 50     | -      | V             |
| $BV_{EBO}$    | $I_E=100\mu\text{A}$                                  | 6.0    | -      | 5.0    | -      | V             |
| $V_{CE(SAT)}$ | $I_C=500\text{mA}, I_B=50\text{mA}$ (2N5320)          | -      | 0.5    | -      | -      | V             |
| $V_{CE(SAT)}$ | $I_C=500\text{mA}, I_B=50\text{mA}$ (2N5321)          | -      | -      | -      | 0.8    | V             |
| $V_{CE(SAT)}$ | $I_C=500\text{mA}, I_B=50\text{mA}$ (2N5322)          | -      | 0.7    | -      | -      | V             |
| $V_{CE(SAT)}$ | $I_C=500\text{mA}, I_B=50\text{mA}$ (2N5323)          | -      | -      | -      | 1.2    | V             |
| $V_{BE(ON)}$  | $V_{CE}=4.0\text{V}, I_C=500\text{mA}$                | -      | 1.1    | -      | 1.4    | V             |
| $h_{FE}$      | $V_{CE}=4.0\text{V}, I_C=500\text{mA}$                | 30     | 175    | 40     | 250    |               |
| $h_{FE}$      | $V_{CE}=2.0\text{V}, I_C=1.0\text{A}$                 | 10     | -      | -      | -      |               |
| $f_T$         | $V_{CE}=4.0\text{V}, I_C=50\text{mA}, f=10\text{MHz}$ | 50     | -      | 50     | -      | MHz           |

R5 (11-May 2017)

2N5320 2N5321 NPN  
 2N5322 2N5323 PNP


**COMPLEMENTARY SILICON  
 SWITCHING TRANSISTORS**



**ELECTRICAL CHARACTERISTICS - Continued:** ( $T_C=25^{\circ}\text{C}$  unless otherwise noted)

| SYMBOL    | TEST CONDITIONS   | MAX | UNITS         |
|-----------|---|-----|---------------|
| $t_{on}$  | $V_{CC}=30\text{V}$ , $I_C=500\text{mA}$ , $I_{B1}=50\text{mA}$ (2N5320, 2N5321)        | 80  | ns            |
| $t_{on}$  | $V_{CC}=30\text{V}$ , $I_C=500\text{mA}$ , $I_{B1}=50\text{mA}$ (2N5322, 2N5323)        | 100 | ns            |
| $t_{off}$ | $V_{CC}=30\text{V}$ , $I_C=500\text{mA}$ , $I_{B1}=I_{B2}=50\text{mA}$ (2N5320, 2N5321) | 800 | ns            |
| $t_{off}$ | $V_{CC}=30\text{V}$ , $I_C=500\text{mA}$ , $I_{B1}=I_{B2}=50\text{mA}$ (2N5322, 2N5323) | 1.0 | $\mu\text{s}$ |

**TO-39 CASE - MECHANICAL OUTLINE**

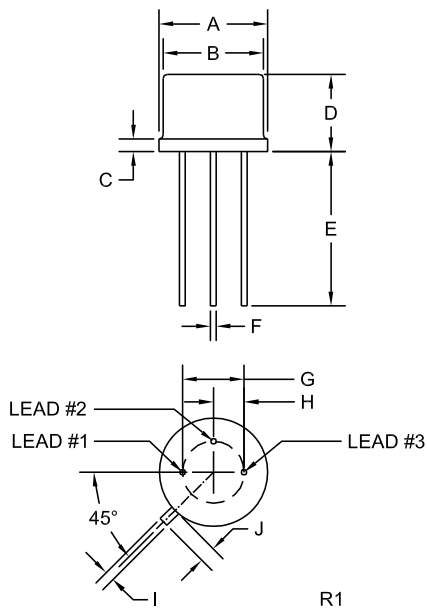

| SYMBOL  | DIMENSIONS |       |             |      |
|---------|------------|-------|-------------|------|
|         | INCHES     |       | MILLIMETERS |      |
|         | MIN        | MAX   | MIN         | MAX  |
| A (DIA) | 0.335      | 0.370 | 8.51        | 9.40 |
| B (DIA) | 0.315      | 0.335 | 8.00        | 8.51 |
| C       | -          | 0.040 | -           | 1.02 |
| D       | 0.240      | 0.260 | 6.10        | 6.60 |
| E       | 0.500      | -     | 12.70       | -    |
| F (DIA) | 0.016      | 0.021 | 0.41        | 0.53 |
| G (DIA) | 0.200      |       | 5.08        |      |
| H       | 0.100      |       | 2.54        |      |
| I       | 0.028      | 0.034 | 0.71        | 0.86 |
| J       | 0.029      | 0.045 | 0.74        | 1.14 |

TO-39 (REV: R1)

**LEAD CODE:**

- 1) Emitter
- 2) Base
- 3) Collector

**MARKING: FULL PART NUMBER**

R5 (11-May 2017)

## OUTSTANDING SUPPORT AND SUPERIOR SERVICES



---

### PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

---

### DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2<sup>nd</sup> day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

---

### CONTACT US

#### Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.  
145 Adams Avenue  
Hauppauge, NY 11788 USA  
Main Tel: (631) 435-1110  
Main Fax: (631) 435-1824  
Support Team Fax: (631) 435-3388  
[www.centalsemi.com](http://www.centalsemi.com)

**Worldwide Field Representatives:**  
[www.centalsemi.com/wwreps](http://www.centalsemi.com/wwreps)

**Worldwide Distributors:**  
[www.centalsemi.com/wwdistributors](http://www.centalsemi.com/wwdistributors)

---

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: [www.centalsemi.com/terms](http://www.centalsemi.com/terms)