

1N5279B
1N5280B
1N5281B


SILICON ZENER DIODES
500mW, 180 THRU 200 VOLT
5% TOLERANCE



www.centrasemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR 1N5279B, 1N5280B, and 1N5281B silicon Zener diodes are high voltage regulators for use in industrial and commercial applications.

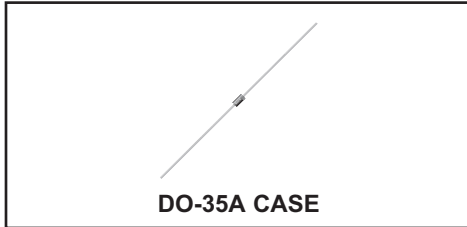

MAXIMUM RATINGS: ($T_L=75^\circ\text{C}$)

Power Dissipation
Operating and Storage Junction Temperature

SYMBOL

P_D
 T_J, T_{stg}

UNIT

500
-65 to +200
mW
 $^\circ\text{C}$

ELECTRICAL CHARACTERISTICS: ($T_A=25^\circ\text{C}$), $V_F=1.2\text{V MAX @ } I_F=200\text{mA}$


Type	Zener Voltage $V_Z @ I_{ZT}$			Test Current I_{ZT}	Maximum Zener Impedance			Maximum Reverse Current		Maximum Temperature Coefficient $\ominus V_Z$
	MIN	NOM	MAX		$Z_{ZT} @ I_{ZT}$	$Z_{ZK} @ I_{ZK}$	$I_R @ V_R$	μA	V	
	V	V	V							
1N5279B	171.0	180	189.0	0.68	2200	6000	0.25	0.1	137	+0.11
1N5280B	180.5	190	199.5	0.66	2400	6500	0.25	0.1	144	+0.11
1N5281B	190.0	200	210.0	0.65	2500	7000	0.25	0.1	152	+0.11

1N5279B
1N5280B
1N5281B

SILICON ZENER DIODES
500mW, 180 THRU 200 VOLT
5% TOLERANCE



DO-35A CASE - MECHANICAL OUTLINE

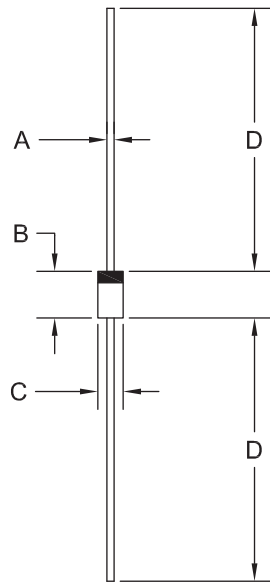

SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.018	0.022	0.46	0.56
B	0.120	0.200	3.05	5.08
C	0.060	0.118	1.52	3.00
D	1.000	-	25.40	-

DO-35A (REV: R0)

R0

R1 (11-September 2013)

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centalsemi.com

Worldwide Field Representatives:
www.centalsemi.com/wwreps

Worldwide Distributors:
www.centalsemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centalsemi.com/terms