


**1N5400 THRU 1N5408**  
**SILICON RECTIFIERS**  
**3.0 AMP, 50 THRU 1000 VOLT**

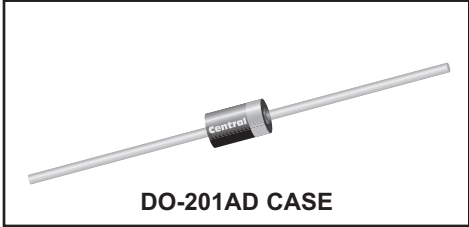

[www.centrasemi.com](http://www.centrasemi.com)

**DESCRIPTION:**

The CENTRAL SEMICONDUCTOR 1N5400 series types are axial lead silicon power rectifiers designed for power supply and general purpose rectifier applications.

**MARKING: FULL PART NUMBER**

**MAXIMUM RATINGS:** ( $T_A=25^\circ\text{C}$  unless otherwise noted)

		<b>1N</b>									
	<b>SYMBOL</b>	<b>5400</b>	<b>5401</b>	<b>5402</b>	<b>5403</b>	<b>5404</b>	<b>5405</b>	<b>5406</b>	<b>5407</b>	<b>5408</b>	<b>UNITS</b>
Peak Repetitive Reverse Voltage	$V_{RRM}$	50	100	200	300	400	500	600	800	1000	V
DC Blocking Voltage	$V_R$	50	100	200	300	400	500	600	800	1000	V
RMS Reverse Voltage	$V_{R(RMS)}$	35	70	140	210	280	350	420	560	700	V
Average Forward Current ( $T_A=75^\circ\text{C}$ )	$I_O$					3.0					A
Peak Forward Surge Current (tp=8.3ms)	$I_{FSM}$					200					A
Operating and Storage Junction Temperature	$T_J, T_{stg}$					-65 to +175					$^\circ\text{C}$


**ELECTRICAL CHARACTERISTICS:** ( $T_A=25^\circ\text{C}$  unless otherwise noted)

<b>SYMBOL</b>	<b>TEST CONDITIONS</b>	<b>MIN</b>	<b>MAX</b>	<b>UNITS</b>
$I_R$	$V_R$ =Rated $V_{RRM}$		5.0	$\mu\text{A}$
$I_R$	$V_R$ =Rated $V_{RRM}$ , $T_A=100^\circ\text{C}$		500	$\mu\text{A}$
$V_F$	$I_F=3.0\text{A}$		1.2	V

**1N5400 THRU 1N5408**  
**SILICON RECTIFIERS**  
**3.0 AMP, 50 THRU 1000 VOLT**



**DO-201AD CASE - MECHANICAL OUTLINE**

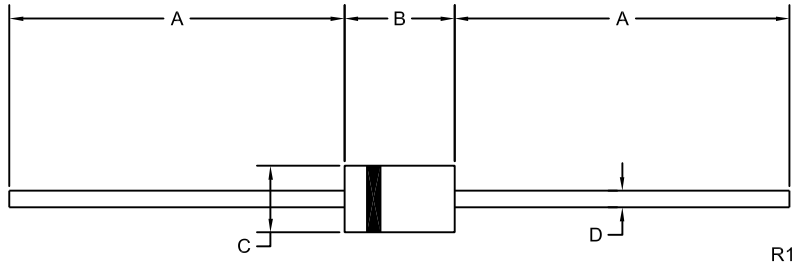

DIMENSIONS				
SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	1.000	-	25.40	-
B	0.283	0.375	7.20	9.53
C	0.189	0.210	4.80	5.33
D	0.047	0.052	1.20	1.32

DO-201AD (REV: R1)

**MARKING: FULL PART NUMBER**

R1 (11-March 2013)

## OUTSTANDING SUPPORT AND SUPERIOR SERVICES



---

### PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

---

### DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2<sup>nd</sup> day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

---

### CONTACT US

#### Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.  
145 Adams Avenue  
Hauppauge, NY 11788 USA  
Main Tel: (631) 435-1110  
Main Fax: (631) 435-1824  
Support Team Fax: (631) 435-3388  
[www.centalsemi.com](http://www.centalsemi.com)

**Worldwide Field Representatives:**  
[www.centalsemi.com/wwreps](http://www.centalsemi.com/wwreps)

**Worldwide Distributors:**  
[www.centalsemi.com/wwdistributors](http://www.centalsemi.com/wwdistributors)

---

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: [www.centalsemi.com/terms](http://www.centalsemi.com/terms)