



# EC4BU SERIES 10 WATT 2:1 INPUT DC-DC CONVERTERS



## FEATURES

- \* 10W Isolated Output
- \* Efficiency to 87%
- \* 2:1 Input Range
- \* Regulated Outputs
- \* Fixed Switching Frequency
- \* Input Under Voltage Protection
- \* Over Current Protection
- \* Conductive EMI Meets EN55022 Class A
- \* Continuous Short Circuit Protection
- \* Without Tantalum Capacitors Inside
- \* CE Mark Meets 2004/108/EC
- \* Safety Meets UL60950-1, EN60950-1 and IEC60950-1



| MODEL NUMBER | INPUT VOLTAGE | OUTPUT VOLTAGE | OUTPUT CURRENT |          | INPUT CURRENT |           | % EFF. | CAPACITOR LOAD MAX. |
|--------------|---------------|----------------|----------------|----------|---------------|-----------|--------|---------------------|
|              |               |                | MIN.           | MAX.     | NO LOAD       | FULL LOAD |        |                     |
| EC4BU-05S33  | 4.7-9 VDC     | 3.3 VDC        | 0 mA           | 2500 mA  | 120 mA        | 1897 mA   | 87     | 2470uF              |
| EC4BU-05S05  | 4.7-9 VDC     | 5 VDC          | 0 mA           | 2000 mA  | 120 mA        | 2299 mA   | 87     | 2000uF              |
| EC4BU-05S12  | 4.7-9 VDC     | 12 VDC         | 0 mA           | 833 mA   | 50 mA         | 2298 mA   | 87     | 940uF               |
| EC4BU-05S15  | 4.7-9 VDC     | 15 VDC         | 0 mA           | 666 mA   | 50 mA         | 2297 mA   | 87     | 690uF               |
| EC4BU-05D05  | 4.7-9 VDC     | ±5 VDC         | 0 mA           | ±1000 mA | 50 mA         | 2353 mA   | 85     | 1000uF              |
| EC4BU-05D12  | 4.7-9 VDC     | ±12 VDC        | 0 mA           | ±416 mA  | 50 mA         | 2295 mA   | 87     | 440uF               |
| EC4BU-05D15  | 4.7-9 VDC     | ±15 VDC        | 0 mA           | ±333 mA  | 50 mA         | 2297 mA   | 87     | 330uF               |
| EC4BU-12S33  | 9-18 VDC      | 3.3 VDC        | 0 mA           | 2500 mA  | 30 mA         | 838 mA    | 82     | 2470uF              |
| EC4BU-12S05  | 9-18 VDC      | 5 VDC          | 0 mA           | 2000 mA  | 30 mA         | 980 mA    | 85     | 2000uF              |
| EC4BU-12S12  | 9-18 VDC      | 12 VDC         | 0 mA           | 833 mA   | 35 mA         | 957 mA    | 87     | 940uF               |
| EC4BU-12S15  | 9-18 VDC      | 15 VDC         | 0 mA           | 666 mA   | 35 mA         | 956 mA    | 87     | 690uF               |
| EC4BU-12D05  | 9-18 VDC      | ±5 VDC         | 0 mA           | ±1000 mA | 45 mA         | 980 mA    | 85     | 1000uF              |
| EC4BU-12D12  | 9-18 VDC      | ±12 VDC        | 0 mA           | ±416 mA  | 45 mA         | 957 mA    | 87     | 440uF               |
| EC4BU-12D15  | 9-18 VDC      | ±15 VDC        | 0 mA           | ±333 mA  | 45 mA         | 957 mA    | 87     | 330uF               |
| EC4BU-24S33  | 18-36 VDC     | 3.3 VDC        | 0 mA           | 2500 mA  | 25 mA         | 419 mA    | 82     | 2470uF              |
| EC4BU-24S05  | 18-36 VDC     | 5 VDC          | 0 mA           | 2000 mA  | 25 mA         | 490 mA    | 85     | 2000uF              |
| EC4BU-24S12  | 18-36 VDC     | 12 VDC         | 0 mA           | 833 mA   | 25 mA         | 478 mA    | 87     | 940uF               |
| EC4BU-24S15  | 18-36 VDC     | 15 VDC         | 0 mA           | 666 mA   | 25 mA         | 478 mA    | 87     | 690uF               |
| EC4BU-24D05  | 18-36 VDC     | ±5 VDC         | 0 mA           | ±1000 mA | 25 mA         | 490 mA    | 85     | 1000uF              |
| EC4BU-24D12  | 18-36 VDC     | ±12 VDC        | 0 mA           | ±416 mA  | 25 mA         | 478 mA    | 87     | 440uF               |
| EC4BU-24D15  | 18-36 VDC     | ±15 VDC        | 0 mA           | ±333 mA  | 25 mA         | 478 mA    | 87     | 330uF               |
| EC4BU-48S33  | 36-75 VDC     | 3.3 VDC        | 0 mA           | 2500 mA  | 20 mA         | 212 mA    | 81     | 2470uF              |
| EC4BU-48S05  | 36-75 VDC     | 5 VDC          | 0 mA           | 2000 mA  | 20 mA         | 245 mA    | 85     | 2000uF              |
| EC4BU-48S12  | 36-75 VDC     | 12 VDC         | 0 mA           | 833 mA   | 20 mA         | 239 mA    | 87     | 940uF               |
| EC4BU-48S15  | 36-75 VDC     | 15 VDC         | 0 mA           | 666 mA   | 20 mA         | 239 mA    | 87     | 690uF               |
| EC4BU-48D05  | 36-75 VDC     | ±5 VDC         | 0 mA           | ±1000 mA | 20 mA         | 245 mA    | 85     | 1000uF              |
| EC4BU-48D12  | 36-75 VDC     | ±12 VDC        | 0 mA           | ±416 mA  | 20 mA         | 239 mA    | 87     | 440uF               |
| EC4BU-48D15  | 36-75 VDC     | ±15 VDC        | 0 mA           | ±333 mA  | 20 mA         | 239 mA    | 87     | 330uF               |

NOTE: 1. Nominal Input Voltage 5, 12, 24 or 48 VDC

# SPECIFICATIONS

All Specifications Typical At Nominal Line, Full Load, and 25°C Unless Otherwise Noted

## INPUT SPECIFICATIONS:

|                                  |                      |                  |
|----------------------------------|----------------------|------------------|
| Input Voltage Range              | 5V                   | 4.7 - 9V         |
|                                  | 12V                  | 9 - 18V          |
|                                  | 24V                  | 18 - 36V         |
|                                  | 48V                  | 36 - 75V         |
| Under Voltage Lockout            | 5Vin power up: 4.4V  | power down: 4.2V |
|                                  | 12Vin power up: 8.4V | power down: 8V   |
|                                  | 24Vin power up: 17V  | power down: 16V  |
|                                  | 48Vin power up: 34V  | power down: 32V  |
| Input Surge Voltage (100mS max.) | 5Vin                 | 12Vdc max.       |
|                                  | 12Vin                | 25Vdc max.       |
|                                  | 24Vin                | 50Vdc max.       |
|                                  | 48Vin                | 100Vdc max.      |
| Input Filter                     | PI Type              |                  |

## OUTPUT SPECIFICATIONS:


|  |                            |
|--|----------------------------|
| Voltage Accuracy   | ±1.5% max.                 |
| Voltage Balance (Dual)                                       | ±2.0% max.                 |
| Transient Response: 25% Step Load Change                     | <500us                     |
| Ripple and Noise, 20MHz BW (Measured with 0.1uF MLCC)        | 100mV pk-pk max.           |
| Temperature Coefficient                                      | ±0.03%/°C max.             |
| Short Circuit Protection                                     | Continuous                 |
| Line Regulation (note1)                                      | Single ±0.2% max.          |
|  | Dual ±0.5% max.            |
| Load Regulation (note2)                                      | Single ±0.2% max.          |
|  | Dual ±1.0% max.            |
| Cross Regulation (Dual output) Load cross variation 10%/100% | ±5% max.                   |
| Over Voltage Protection                                      | Zener or TVS Clamp         |
| Current Limit  | 110% - 140% Nominal Output |
| Start up time  | 20ms max.                  |

## OPTION:

- Suffix "T" to the model number with remote positive on/off control:  
 Logic Compatibility ..... CMOS or open collector TTL, referenced to -Vin  
 Module on ..... >5.5VDC to 75VDC or open circuit  
 Module off ..... <1.2VDC
- Suffix "A" to the model number with output voltage adjustable  
 external trim adj. range ≤ ±10%, single output models only.

## CASE B Dimensions:

NOTE: Pin Size is 0.04±0.004 Inch (1.0±0.1 mm)DIA  
 All Dimensions In Inches (mm)  
 Tolerances Inches: X.XX= ±0.04 , X.XXX= ±0.010  
 Millimeters: X.X= ±1.0 , X.XX=±0.25

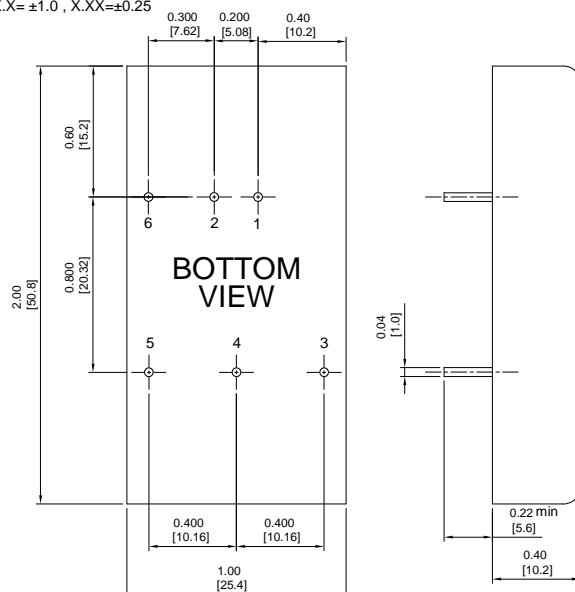


## GENERAL SPECIFICATIONS:

|                                     |  |
|-------------------------------------|--|
| Efficiency                          | See Table                                    |
| Isolation Voltage                   | 1500 VDC min.                                |
| Isolation Resistance                | 10 <sup>9</sup> ohm min.                     |
| Isolation Capacitance               | 1000pF typ.                                  |
| Switching Frequency                 | 350KHz typ.                                  |
| EMI/RFI                             | Conductive EMI Meets EN55022 Class A         |
| Case Grounding                      | Connect Case to -Vin with Decoupling Y Cap.  |
| Operating Ambient Temperature Range | -40°C to +85°C                               |
| Derating, Above 85°C                | Linearly to Zero Power at +105°C             |
| Case Temperature (Note 4)           | 105°C  |
| Cooling                             | Natural Convection                           |
| Storage Temperature Range           | -55°C to +125°C                              |
| Humidity                            | 95% RH max. Non condensing                   |
| MTBF                                | MIL-STD-217-F, GB, 25°C, Full Load 1200Khrs  |
| Dimensions                          | 2.00x1.00x0.4 inches (50.8x25.4x10.2 mm)     |
| Case Material                       | Black Coated Copper with Non-Conductive Base |
| Weight                              | 35g  |

## NOTE:

- Measured from high line to low line.
- Measured from full load to min. load.
- Maximum case temperature under any operating condition should not be exceeded 105°C.

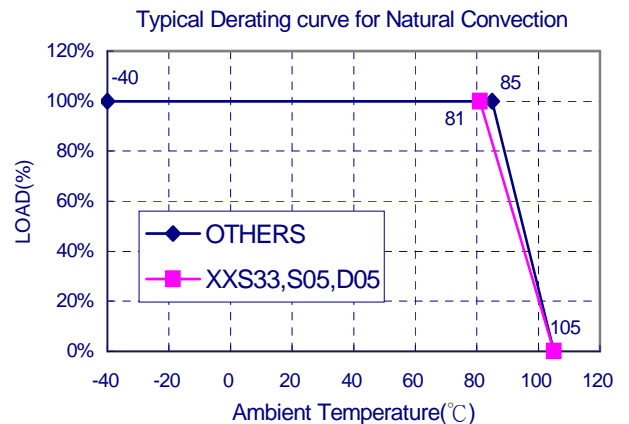

| PIN CONNECTION |                          |
|----------------|--------------------------|
| Pin            | Function                 |
| 1              | +Input                   |
| 2              | -Input                   |
| 3              | +V Output                |
| 4              | Common/NP/Trim(Optional) |
| 5              | -V Output                |
| 6              | NP/Remote(Optional)      |

\*NP-NO PIN ON SINGLE OUTPUT