


Types LC EIA Class 3, Semiconductor Type Reduced Titanite Disc Ceramic Capacitors

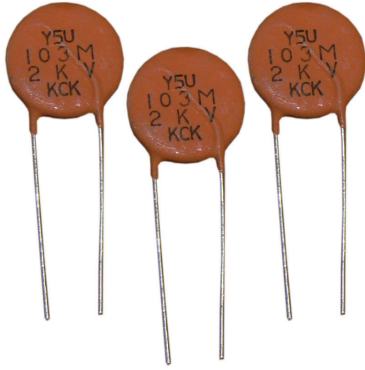

EIA Class 3 reduced titanite disc ceramic capacitors are ideal for use in transistorized circuitry for bypass and coupling applications.

Highlights

- High Capacitance
- Low power factor
- Superior radio frequency impedance
- Meets RS-198C for Class 3 ceramic capacitors
- Radial leads

Specifications

Capacitance Range:	.01 to .10 μF
Voltage Range:	25 Vdc
Tolerance:	$\pm 20\%$
Operating Temperature Range:	$-30\text{ }^{\circ}\text{C}$ to $+85\text{ }^{\circ}\text{C}$
Insulation Resistance:	1 megohm minimum
Breakdown Voltage:	2.5 x rated (5 seconds Max.)
Power Factor:	1.5% Max. @ 1 KHz
Lead Length:	1.0 inch minimum

Ratings

Cap (μF)	Catalog Part Number	Tol. (\pm)	Temp. Coef.	Size (Inches)				Size (Millimeters)			
				D	T	S	d	D	T	S	d
25 Vdc											
.010	LC103M*	20%	Y5R**	.235	.138	.250	.025	6.0	3.5	6.4	.6
.100	LC104M*	20%	Y5R**	.495	.138	.250	.025	12.6	3.5	6.4	.6

*available only until stock is depleted

**maximum capacitance change over temperature rating: $\pm 15\%$

Physical Specifications

Case: Conformal Coating

Lead material: Tinned copper wire. (Minimum lead content: 5%)

Tape and Reel Available upon Request

Leads are formed to .200 (5.0mm) lead spacing

For D less than .315 (8.0mm) - Quantity/Reel = 2500 pcs

Tape and reel not available for greater than .472" (12mm)

