



SYMBOL DEFINITION		TOTAL NO OF INSPECTIONS REQUIRED
□	A DIMENSION WITHOUT AN INSPECTION REPORT SYMBOL DOES NOT REQUIRE INSPECTION. IT MAY BE CONTROLLED ON THE INDIVIDUAL COMPONENT DRAWING.	18
□	LAST NO. USED	12

MISSING SYMBOLS				REVISION HISTORY		AUTH	DR	AP/D	
DATE	STG	REV	N/P	CHG	ZONE				
21N001	R	01	-	-		CLEARED REV COL & ALL PARTS - REVISED MAT'L SPEC	217409	JAN RVP	RC
19MY03	R	02	-	-		15300017 - OBSOLETE	241251	EOV	RC
29SE04	R	03	-	-		DIM 9 TOLERANCE WAS +.3/- .45, ADDED DIMS 11 AND 12 TO PD AND TBT TO TD	258705	MJM	TM
24MY06	R	04	-	-		15324857 - REVISED TOQ REVISION LEVEL	280148	JS	TM
25OC06	R	05	-	-		15324857 - REMOVED DIM #11	286257	JTZ	JVM
17DE06	R	06	-	-		ALL ACTIVE PARTS - REVISED NOTE #2	287948	EES	MM

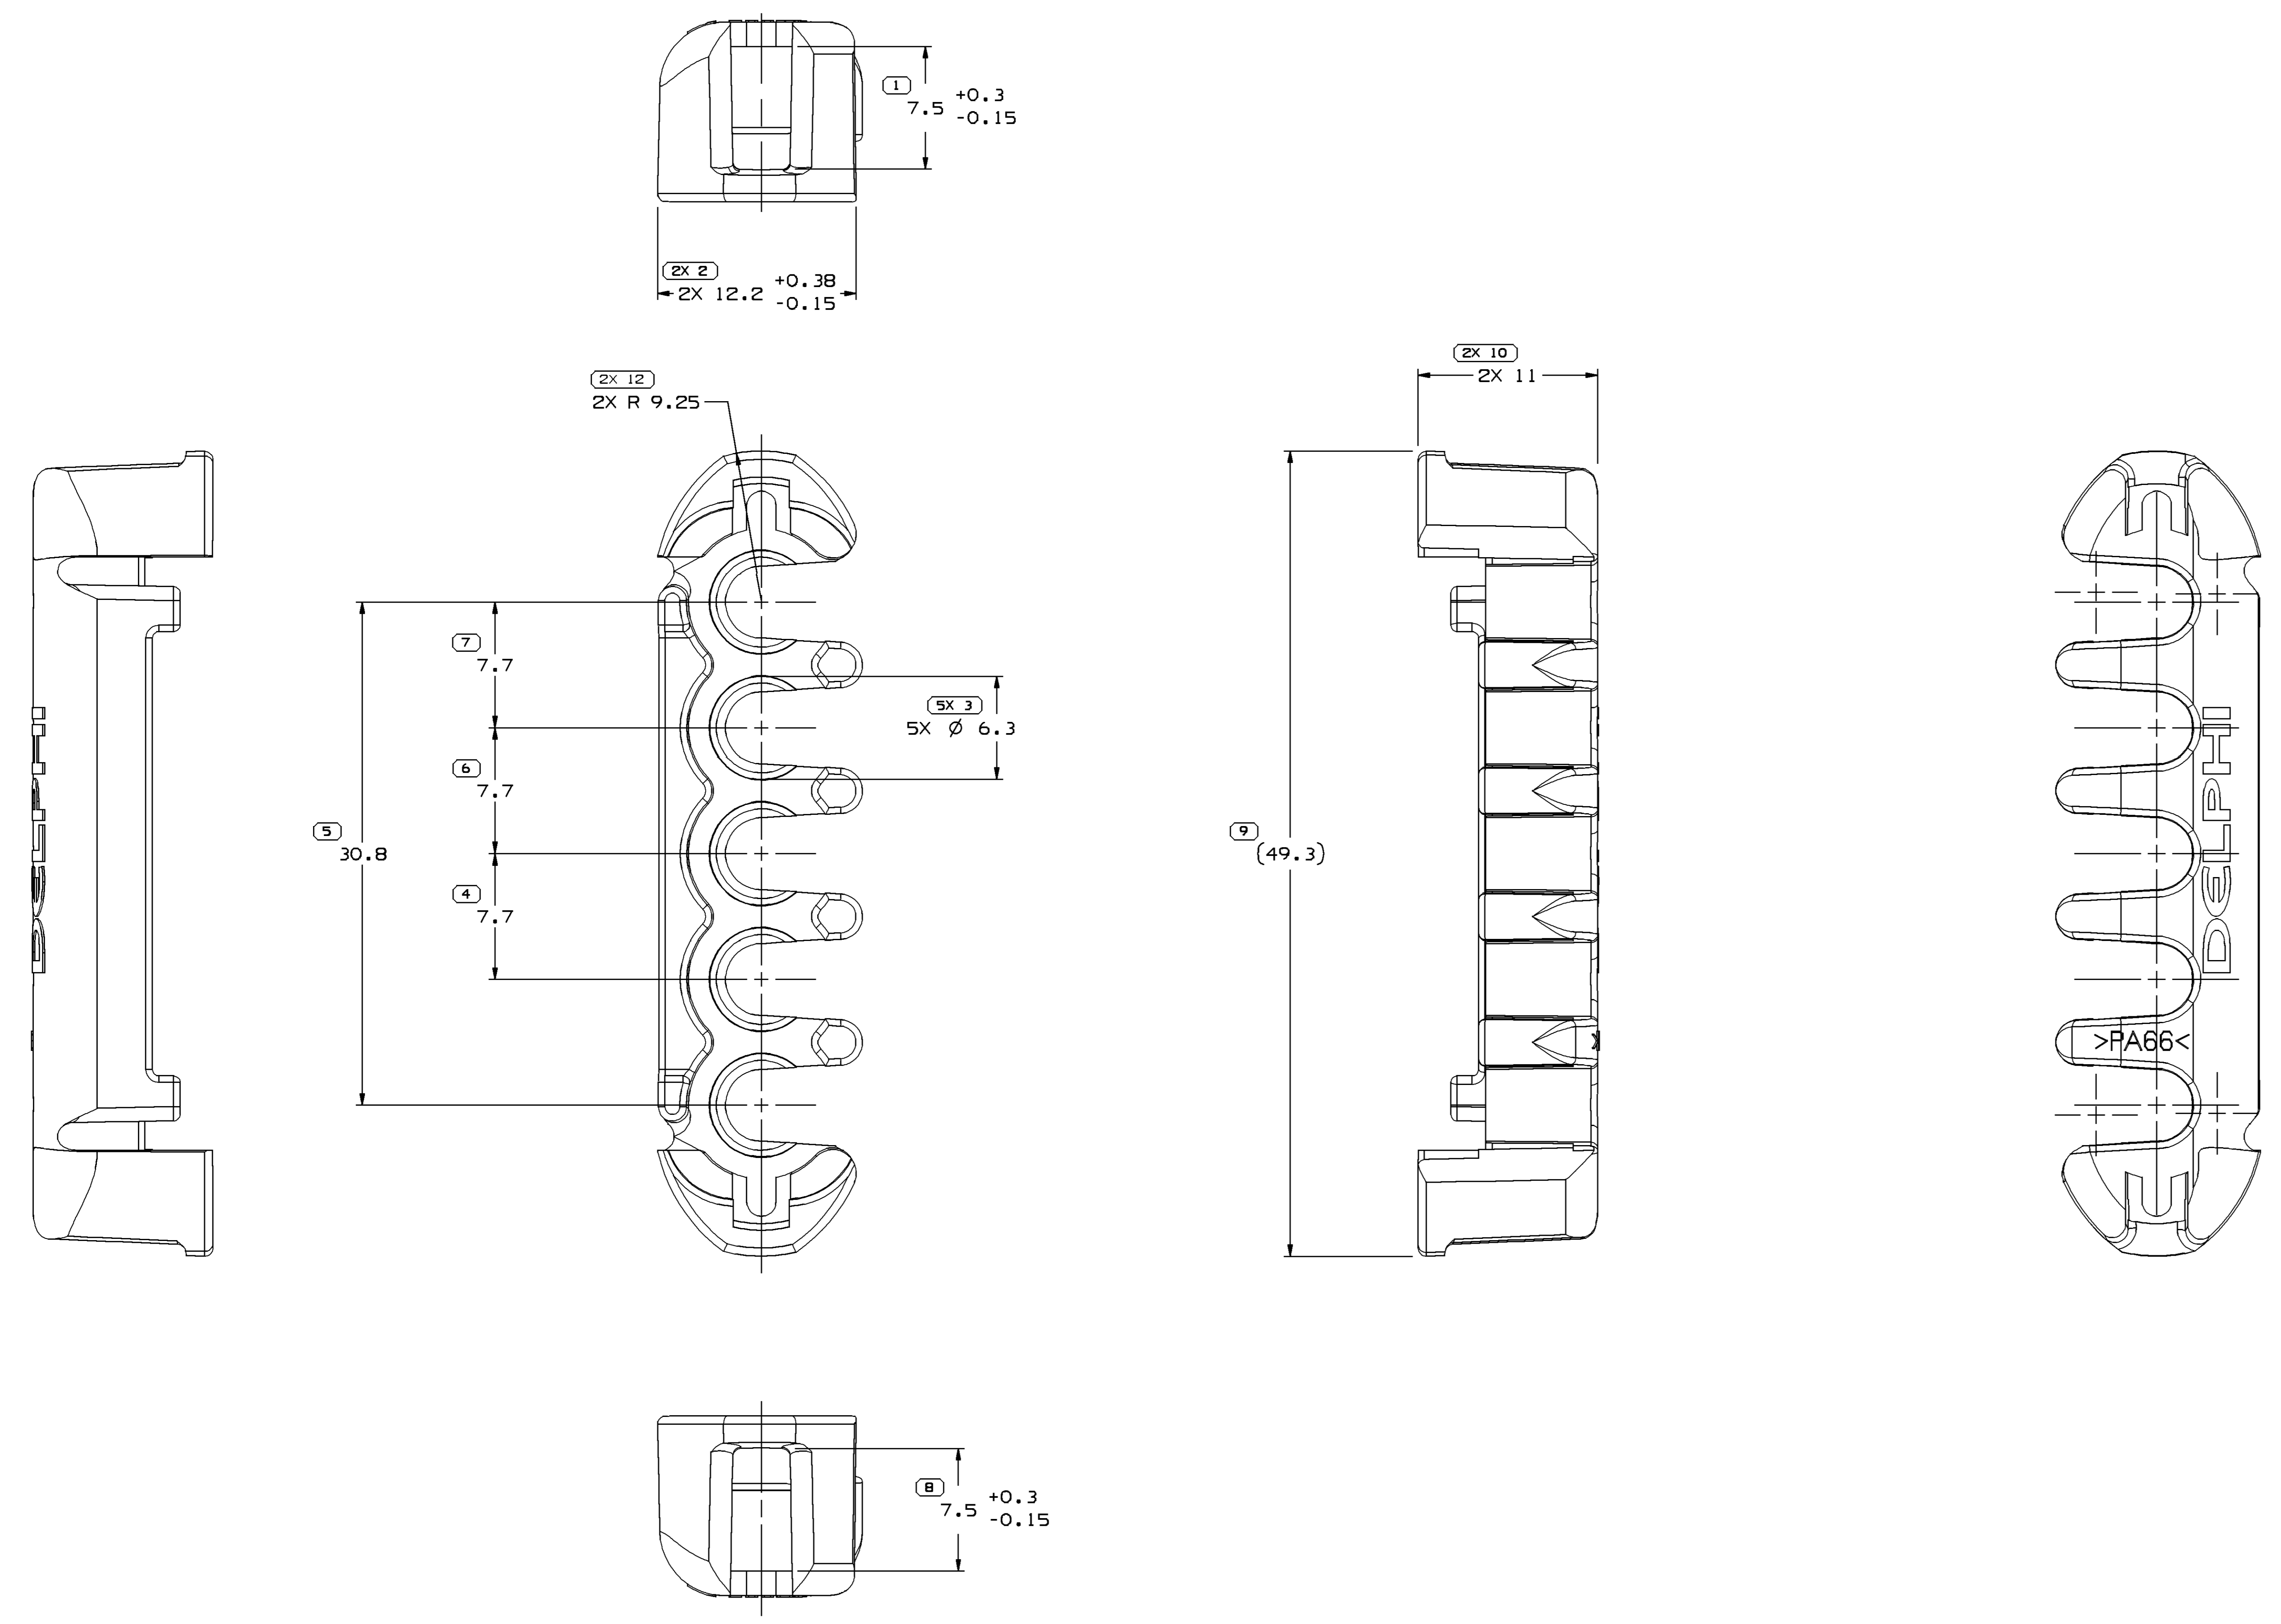

- NOTES
- UNLESS OTHERWISE SPECIFIED AND/OR INDICATED:  
DIMENSIONS ARE TO FACE OF VIEW SHOWN AND AUTOMATICALLY ROUNDED BY COMPUTER FOR INSPECTION (SEE MATH MODEL FOR PRECISE DIMENSIONS). FOR ALL OTHER DIMENSIONS NOT SHOWN BUT REQUIRED FOR TOOL BUILD, SEE MATH MODEL FOR PRECISE TOOL PATH DATA.
  - MATERIAL RECYCLING CODE PER ISO 11469. (2.3)X(0.1) CHARACTERS AS SHOWN TO BE LOCATED ON ANY EXTERIOR SURFACE. OPTIONAL CONSTRUCTION TO BE NO MATERIAL RECYCLING CODE.
  - THIS PART IS NOT CONTROLLED FOR AUTOMATIC FEEDING.
  - REFERENCE MATING COMPONENTS OR EQUIVALENT:  
CONNECTOR 15300011
  - MAX CABLE DIAMETER THAT WILL FIT PART IS  $\phi$  4.2
  - (2.3)X(0.1) DELPHI CORPORATE BRAND TO BE LOCATED ON ANY EXTERIOR SURFACE, PREFERABLY VISIBLE AT FINAL ASSEMBLY. OPTIONAL CONSTRUCTION FOR EXISTING TOOLING MAY BE "PED".

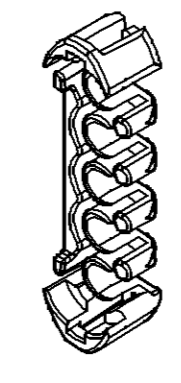

PART NO	REV	N/P	STATUS	MATERIAL SPECIFICATION AND COLOR	VOL CM <sup>3</sup>	REPLACED BY
15324857	02	AD		M3592001 PA66 IM HS BLK	1.744	-
15300017	04	AA	OBSOLETE	M3592008 PA66 IM HS BLU	1.744	15324857

DIMENSIONAL RANGE (MM)	TOLERANCE UNLESS OTHERWISE SPECIFIED	ANGULAR TOLERANCE 2 $\theta$
FROM > 0 TO > 20	$\pm 0.15$	$\pm 1$
> 20 TO > 30	$\pm 0.2$	$\pm 1.2$
> 30 TO > 70	$\pm 0.3$	$\pm 1.5$
> 70 TO > 100	$\pm 0.4$	$\pm 1.8$
> 100 TO > 150	$\pm 0.5$	$\pm 2.0$
> 150 TO > 200	$\pm 0.6$	$\pm 2.2$
> 200 TO > 250	$\pm 0.7$	$\pm 2.5$
> 250 TO > 300	$\pm 0.8$	$\pm 2.8$
> 300 TO > 400	$\pm 1.0$	$\pm 3.2$

PART DRAWING	
STYLE	SEE CHART
VOLUME (CM <sup>3</sup> )	DISTR CODE
	D
UNLESS OTHERWISE SPECIFIED	
THIS DOCUMENT IS IN ACCORDANCE WITH ASME Y14.5M-1994 AS AMENDED BY THE IN-SUPPLY DIMENSIONING AND TOLERANCE ADDENDUM-2001. SEPARATE WRITINGS OR FEATURES MAY BE BASED SEPARATELY PERMISSIBLE OF DIMENSION REFERENCES.	
ALL DIMENSIONS ARE IN MILLIMETERS	
THIRD ANGLE PROJECTION	DO NOT SCALE
USE MATH DATA	USE MATH DATA

DELPHI	
DELPHI PACKARD ELECTRIC SYSTEMS	
WREN, MI	
DR	DATE
AP/D01 R. GUTIERREZ	23AU99
AP/D02 C. MIRANDA	23AU99
AP/D03 J. REIDER	30AU99
AP/D04	
AP/D05	
SUBSTANCES OF CONCERN AND RECYCLED CONTENT PER DELPHI 10949001	
MATERIAL	
SEE CHART	
DRAWING NAME	
TAXI LOCK SECONDARY TPA M/P	
DRAWING NUMBER	
15324858	
SIZE	SCALE
A0	5:1
FRAME NO	SHEET NO
1	1 OF 1
REV	N/P
06	-