



Meets ANSI/ESD S20.20 and Grounding standard ANSI/ESD S6.1

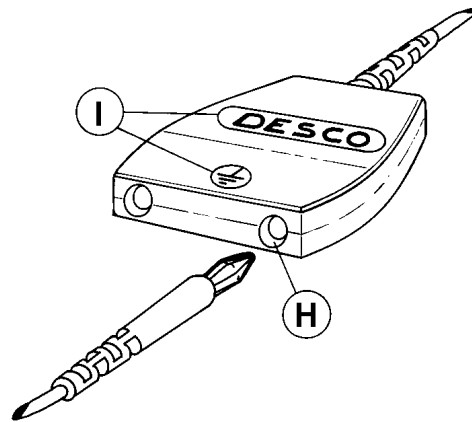

- A. 10mm (.395") snap socket to ground work surface.
- B. Molded in black thermoplastic elastomer.
- C. Ring terminal, .200" ID, (#10).
- D. Extra ring terminal included for customizing length.
- E. The [09821](#) has a 1 megohm resistor between the snap and ground, with banana jacks at ground potential. The [09820](#) has no resistor between snap and ground, with banana jacks also at ground potential.
- F. Wire is autosplice crimped to secure it inside of the mold.
- G. High flex strand copper, 20 gauge, with PVC insulated jacket
[09821](#) - black insulation
[09820](#) - green insulation with yellow stripe
 OD = .100"
- H. Dual banana jacks at ground potential (.162" - .164" ± .002" ID).
- I. Desco and ground symbol molded into the plastic.
- J. Date coded to show month and year of manufacture. Arrow points to month of manufacture (12:00 = December), numerals indicate the year
 Worksurface and two Wrist Straps can connect to Common Point Ground

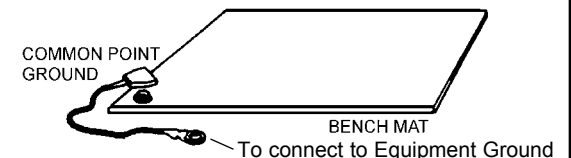

ITEM	DESCRIPTION
09820	No Resistor - Green Wire with Yellow Stripe
09821	One Megohm Resistor to Mat - Black Wire



Made in the United States of America

Specifications and procedures subject to change without notice.

GROUND CORD, COMMON POINT, WORKSURFACE

DESCO WEST: 3651 WALNUT AVE., CHINO, CA 91710 WEB SITE: Desco.com
 PHONE (909) 627-8178 FAX (909) 627-7449
 DESCO EAST: ONE COLGATE WAY, CANTON, MA 02021-1407
 PHONE (781) 821-8370 FAX (781) 575-0172

DRAWING NUMBER
09820

DATE:
February 2016

DESCO