



2.4 GHZ EMBEDDED RF
MODULES FOR OEMS



XSTREAM® OEM RF MODULES

Embedded RF modules provide outstanding range (up to 10 miles) in a low-cost wireless solution

Digi's XStream embedded RF modules enable easy and reliable serial wireless connectivity between devices with minimal development out-of-the-box. XStream RF modules provide transmission ranges of up to 10 miles in a low-cost wireless solution.

Innovations stamped in their design enable XStream RF modules to yield two- to eight-times the range of competing RF devices. This allows OEMs and integrators to cover more ground with fewer devices, with increased reliability. Additionally, XStream RF modules are easy to use, thereby


reducing the complexity of data system development and time to market.

Available in a variety of configurations, including Commercial or Industrial temperature ratings, and multiple antenna variants, XStream RF modules can wirelessly connect a variety of devices across many applications including remote monitoring, building automation/security, industrial automation/SCADA, fleet management/asset tracking and sensor data capture in embedded systems.


BENEFITS

- Indoor/Urban range up to 600 feet (180 m)
- Outdoor line-of-sight range up to 10 miles (16 km) (with high gain antenna)
- 7 frequency hopping channels each with 65K available addresses
- Outstanding receiver sensitivity (-105 dBm @ 9600 bps)
- Low-power features for power-sensitive applications
 - Pin, serial port and cyclic sleep modes available
- Performs retries and acknowledgments for reliable packet delivery
- Multiple antenna options (Wire Whip, MMCX, RPSMA)
- Commercial (0° C to 70° C) and Industrial temperature ratings (-40° C to 85° C)

RELATED PRODUCTS

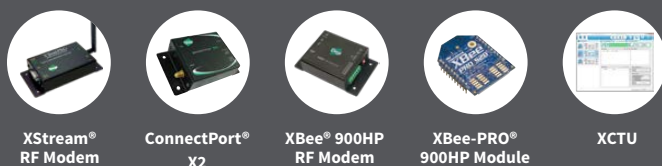

APPLICATION EXAMPLE

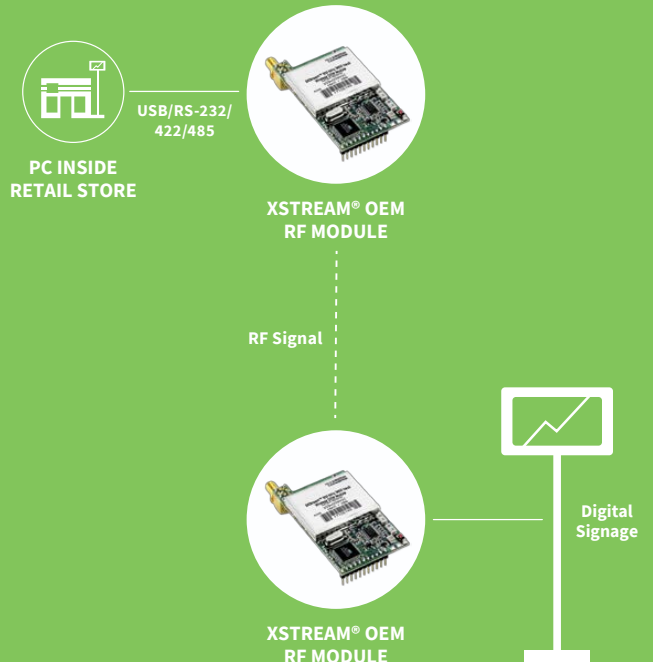

SPECIFICATIONS

24XStream® (2.4 GHz)

PERFORMANCE

| | |
|--|--|
| INDOOR/URBAN RANGE (W/ 2.1 DB DIPOLE ANTENNA) | Up to 600 ft (180 m) |
| OUTDOOR RF LINE-OF-SIGHT RANGE (W/ 2.1 DB DIPOLE ANTENNA) | Up to 3 miles (5 km) |
| OUTDOOR RF LINE-OF-SIGHT RANGE (W/ HIGH-GAIN ANTENNA) | Up to 10 miles (16 km) |
| TRANSMIT POWER OUTPUT | 50 mW (17 dBm) |
| INTERFACE DATA RATE (SOFTWARE SELECTABLE) | 10 - 57600 bps (including non-standard baud rates) |
| THROUGHPUT DATA RATE | 9,600 bps |
| RF DATA RATE | 9.6 or 19.2 Kbps |
| RECEIVER SENSITIVITY | -105 dBm (@ 9600 bps) |

POWER REQUIREMENTS

| | |
|--------------------|------------------------|
| SUPPLY VOLTAGE | 5V (± 0.25V) regulated |
| RECEIVE CURRENT | 80 mA |
| TRANSMIT CURRENT | 150 mA |
| POWER-DOWN CURRENT | < 26 µA |

GENERAL

| | |
|------------------------|--|
| DIMENSIONS (L X W X H) | 1.600 in x 2.825 in x 0.350 in (4.06 cm x 7.18 cm x 0.89 cm) |
| WEIGHT | 0.8 oz (24 g) |
| OPERATING TEMPERATURE | 0° C to 70° C (commercial) or -40° C to 85° C (industrial) |
| ANTENNA OPTIONS | RPSMA, MMCX or Wire antenna |


NETWORKING & SECURITY

| | |
|---|---|
| OPERATING FREQUENCY | ISM 2.4000 - 2.4835 GHz |
| SUPPORTED NETWORK TOPOLOGIES | Peer-to-Peer (no master/slave dependencies), Point-to-Point, Point-to-Multipoint, Multidrop |
| NUMBER OF CHANNELS (SOFTWARE SELECTABLE) | 7 Frequency hopping channels |
| NETWORK FILTRATION LAYERS | VID, Channel, Destination address |


AGENCY APPROVALS

| | |
|----------------------|---------------|
| FCC PART 15.247 | OUR-24XSTREAM |
| INDUSTRY CANADA (IC) | 4214A 12008 |


TOP VIEW

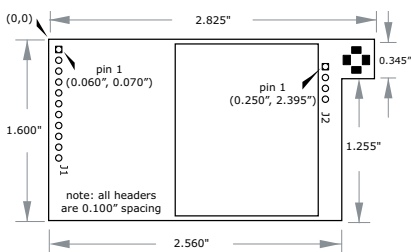

BOTTOM VIEW (pins protruding)

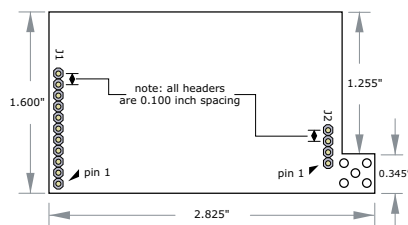

SIDE VIEW (with RPSMA connector)

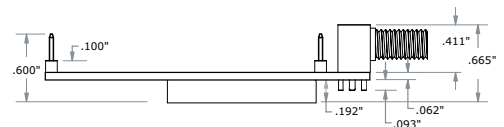

| PART NUMBERS | DESCRIPTION |
|--------------|---|
| X24-009-DK | XStream Development Kit - 2.4 GHz, 50 mW, 9600 bps, 3" wire & RPSMA connector |
| X24-019-DK | XStream Development Kit - 2.4 GHz, 50 mW, 19.2 Kbps, 3" wire & RPSMA connector |
| X24-009NMC | 24XStream - 50 mW transceiver, w/MMCX, 9600 bps, commercial grade (0° C to 70° C) |
| X24-009NMI | 24XStream - 50 mW transceiver, w/MMCX, 9600 bps, industrial grade (-40° C to 85° C) |
| X24-009NSC | 24XStream - 50 mW transceiver, w/RPSMA, 9600 bps, commercial grade (0° C to 70° C) |
| X24-009NSI | 24XStream - 50 mW transceiver, w/RPSMA, 9600 bps, industrial grade (-40° C to 85° C) |
| X24-009NST | 24XStream - 50 mW transceiver, w/RPSMA, 9600 bps, tested industrial grade (-40° C to 85° C) |
| X24-009WNC | 24XStream - 50 mW transceiver, 3" wire antenna, 9600 bps, commercial grade (0° C to 70° C) |
| X24-009WNI | 24XStream - 50 mW transceiver, 3" wire antenna, 9600 bps, industrial grade (-40° C to 85° C) |
| X24-019NMC | 24XStream - 50 mW transceiver, w/MMCX, 19200 bps, commercial grade (0° C to 70° C) |
| X24-019NMI | 24XStream - 50 mW transceiver, w/MMCX, 19200 bps, industrial grade (-40° C to 85° C) |
| X24-019NMT | 24XStream - 50 mW transceiver, w/MMCX, 19200 bps, tested industrial grade (-40° C to 85° C) |
| X24-019NSC | 24XStream - 50 mW transceiver, w/RPSMA, 19200 bps, commercial grade (0° C to 70° C) |
| X24-019NSI | 24XStream - 50 mW transceiver, w/RPSMA, 19200 bps, industrial grade (-40° C to 85° C) |
| X24-019NST | 24XStream - 50 mW transceiver, w/RPSMA, 19200 bps, tested industrial grade (-40° C to 85° C) |
| X24-019WNC | 24XStream - 50 mW transceiver, 3" wire antenna, 19200 bps, commercial grade (0° C to 70° C) |
| X24-019WNI | 24XStream - 50 mW transceiver, 3" wire antenna, 19200 bps, industrial grade (-40° C to 85° C) |

FOR MORE INFORMATION
PLEASE VISIT WWW.DIGI.COM

DIGI SERVICE AND SUPPORT / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit www.digi.com/support.

© 1996-2015 Digi International Inc. All rights reserved.
All trademarks are the property of their respective owners.

91001415
C1/915

DIGI INTERNATIONAL WORLDWIDE HQ
877-912-3444 / 952-912-3444 / www.digi.com

DIGI INTERNATIONAL FRANCE
+33-1-55-61-98-98 / www.digi.fr

DIGI INTERNATIONAL JAPAN
+81-3-5428-0261 / www.digi-intl.co.jp

DIGI INTERNATIONAL SINGAPORE
+65-6213-5380

DIGI INTERNATIONAL CHINA
+86-21-50492199 / www.digi.com.cn

