


Features

- 1.0 Watt Power Dissipation
- 3.3V - 75V Nominal Zener Voltage
- Standard V_Z Tolerance is 5%
- **Lead Free Finish, RoHS Compliant (Note 2)**

Mechanical Data

- Case: DO-41
- Case Material: Glass. UL Flammability Classification Rating 94V-0
- Terminals: Finish — Sn96.5Ag3.5. Solderable per MIL-STD-202, Method 208
- Polarity: Cathode Band
- Marking: Type Number
- Weight: 0.35 grams (approximate)

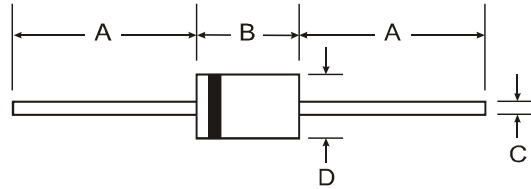

| DO-41 Glass | | |
|----------------------|------|------|
| Dim | Min | Max |
| A | 26.0 | — |
| B | — | 4.10 |
| C | — | 0.86 |
| D | — | 2.60 |
| All Dimensions in mm | | |

Maximum Ratings @ $T_A = 25^\circ\text{C}$ unless otherwise specified

| Characteristic | Symbol | Value | Unit |
|--|-----------------|--------------|---------------------------|
| Zener Current (see Table page 2) | I_Z | P_d / V_Z | mA |
| Power Dissipation | P_d | 1.0 | W |
| Derate Above 50°C (Note 1) | | 6.67 | mW/ $^\circ\text{C}$ |
| Thermal Resistance - Junction to Ambient Air | $R_{\theta JA}$ | 175 | $^\circ\text{C}/\text{W}$ |
| Forward Voltage @ $I_F = 200\text{ mA}$ | V_F | 1.2 | V |
| Operating and Storage Temperature Range | T_i, T_{STG} | -65 to + 175 | $^\circ\text{C}$ |

- Notes:
1. Valid provided that leads are kept at TL @ 50°C with lead length = 9.5mm (3/8") from case.
 2. EC Directive 2002/95/EC (RoHS) revision 13.2.2003. Glass and high temperature solder exemptions applied where applicable, see *EU Directive Annex Notes 5 and 7*.

Electrical Characteristics

@T_A = 25°C unless otherwise specified

| Type Number | Nominal Zener Voltage (Note 3) | Test Current | Maximum Zener Impedance (Note 4) | | | Maximum Reverse Leakage Current | | Max Surge Current 8.3ms | Temperature Coefficient @ I _{ZT} |
|-------------|----------------------------------|-----------------|-----------------------------------|-----------------------------------|-----------------|---------------------------------|------------------|-------------------------|---|
| | V _Z @ I _{ZT} | I _{ZT} | Z _{ZT} @ I _{ZT} | Z _{ZK} @ I _{ZK} | I _{ZK} | I _R | @ V _R | I _{ZS} | |
| | (V) | (mA) | (Ω) | (Ω) | (mA) | (μA) | (V) | (mA) | %/°C |
| 1N4728A | 3.3 | 76 | 10 | 400 | 1.0 | 100 | 1.0 | 1380 | -0.08 to -0.05 |
| 1N4729A | 3.6 | 69 | 10 | 400 | 1.0 | 100 | 1.0 | 1260 | -0.08 to -0.05 |
| 1N4730A | 3.9 | 64 | 9.0 | 400 | 1.0 | 50 | 1.0 | 1190 | -0.07 to -0.02 |
| 1N4731A | 4.3 | 58 | 9.0 | 400 | 1.0 | 10 | 1.0 | 1070 | -0.07 to -0.01 |
| 1N4732A | 4.7 | 53 | 8.0 | 500 | 1.0 | 10 | 1.0 | 970 | -0.03 to +0.04 |
| 1N4733A | 5.1 | 49 | 7.0 | 550 | 1.0 | 10 | 1.0 | 890 | -0.01 to +0.04 |
| 1N4734A | 5.6 | 45 | 5.0 | 600 | 1.0 | 10 | 2.0 | 810 | 0 to +0.045 |
| 1N4735A | 6.2 | 41 | 2.0 | 700 | 1.0 | 10 | 3.0 | 730 | +0.01 to +0.055 |
| 1N4736A | 6.8 | 37 | 3.5 | 700 | 1.0 | 10 | 4.0 | 660 | +0.015 to +0.06 |
| 1N4737A | 7.5 | 34 | 4.0 | 700 | 0.5 | 10 | 5.0 | 605 | +0.02 to +0.065 |
| 1N4738A | 8.2 | 31 | 4.5 | 700 | 0.5 | 10 | 6.0 | 550 | 0.03 to 0.07 |
| 1N4739A | 9.1 | 28 | 5.0 | 700 | 0.5 | 10 | 7.0 | 500 | 0.035 to 0.075 |
| 1N4740A | 10 | 25 | 7.0 | 700 | 0.25 | 10 | 7.6 | 454 | 0.04 to 0.08 |
| 1N4741A | 11 | 23 | 8.0 | 700 | 0.25 | 5.0 | 8.4 | 414 | 0.045 to 0.08 |
| 1N4742A | 12 | 21 | 9.0 | 700 | 0.25 | 5.0 | 9.1 | 380 | 0.045 to 0.085 |
| 1N4743A | 13 | 19 | 10 | 700 | 0.25 | 5.0 | 9.9 | 344 | 0.05 to 0.085 |
| 1N4744A | 15 | 17 | 14 | 700 | 0.25 | 5.0 | 11.4 | 304 | 0.055 to 0.09 |
| 1N4745A | 16 | 15.5 | 16 | 700 | 0.25 | 5.0 | 12.2 | 285 | 0.055 to 0.09 |
| 1N4746A | 18 | 14 | 20 | 750 | 0.25 | 5.0 | 13.7 | 250 | 0.06 to 0.09 |
| 1N4747A | 20 | 12.5 | 22 | 750 | 0.25 | 5.0 | 15.2 | 225 | 0.06 to 0.09 |
| 1N4748A | 22 | 11.5 | 23 | 750 | 0.25 | 5.0 | 16.7 | 205 | 0.06 to 0.095 |
| 1N4749A | 24 | 10.5 | 25 | 750 | 0.25 | 5.0 | 18.2 | 190 | 0.06 to 0.095 |
| 1N4750A | 27 | 9.5 | 35 | 750 | 0.25 | 5.0 | 20.6 | 170 | 0.06 to 0.095 |
| 1N4751A | 30 | 8.5 | 40 | 1000 | 0.25 | 5.0 | 22.8 | 150 | 0.06 to 0.095 |
| 1N4752A | 33 | 7.5 | 45 | 1000 | 0.25 | 5.0 | 25.1 | 135 | 0.06 to 0.095 |
| 1N4753A | 36 | 7.0 | 50 | 1000 | 0.25 | 5.0 | 27.4 | 125 | 0.06 to 0.095 |
| 1N4754A | 39 | 6.5 | 60 | 1000 | 0.25 | 5.0 | 29.7 | 115 | 0.06 to 0.095 |
| 1N4755A | 43 | 6.0 | 70 | 1500 | 0.25 | 5.0 | 32.7 | 110 | 0.06 to 0.095 |
| 1N4756A | 47 | 5.5 | 80 | 1500 | 0.25 | 5.0 | 35.8 | 95 | 0.06 to 0.095 |
| 1N4757A | 51 | 5.0 | 95 | 1500 | 0.25 | 5.0 | 38.8 | 90 | 0.06 to 0.095 |
| 1N4758A | 56 | 4.5 | 110 | 2000 | 0.25 | 5.0 | 42.6 | 80 | 0.06 to 0.095 |
| 1N4759A | 62 | 4.0 | 125 | 2000 | 0.25 | 5.0 | 47.1 | 70 | 0.06 to 0.095 |
| 1N4760A | 68 | 3.7 | 150 | 2000 | 0.25 | 5.0 | 51.7 | 65 | 0.06 to 0.095 |
| 1N4761A | 75 | 3.3 | 175 | 2000 | 0.25 | 5.0 | 56.0 | 60 | 0.06 to 0.095 |

- Notes:
3. Measured under thermal equilibrium and dc (I_{ZT}) test conditions.
 4. The Zener impedance is derived from the 60 Hz ac voltage which results when an ac current having an rms value equal to 10% of the Zener current (I_{ZT} or I_{ZK}) is superimposed on I_{ZT} or I_{ZK}. Zener impedance is measured at two points to insure a sharp knee on the breakdown curve and to eliminate unstable units.

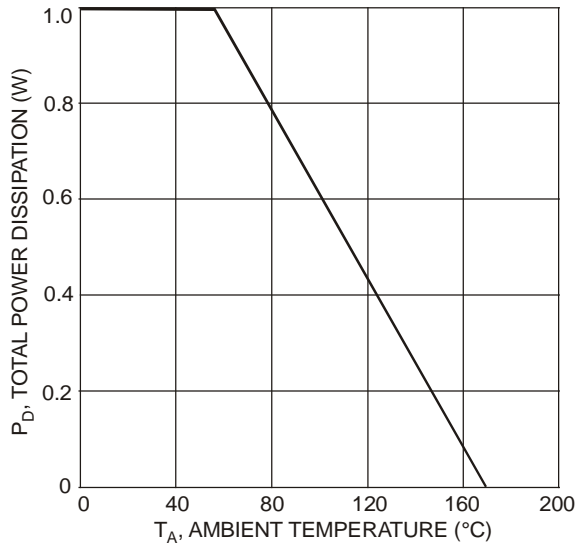


Fig. 1 Power Dissipation vs. Ambient Temperature

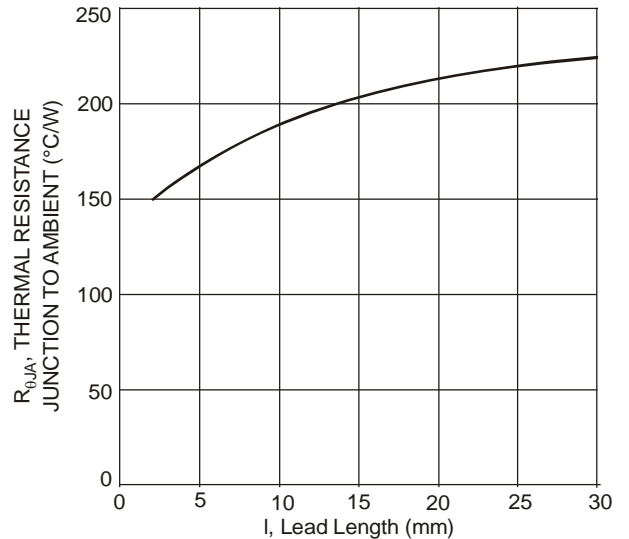


Fig. 2 Typical Thermal Resistance vs. Lead Length

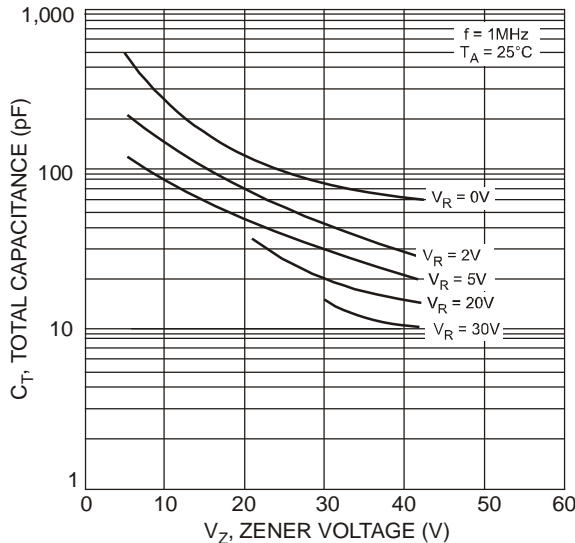


Fig. 3 Typical Total Capacitance vs. Zener Voltage

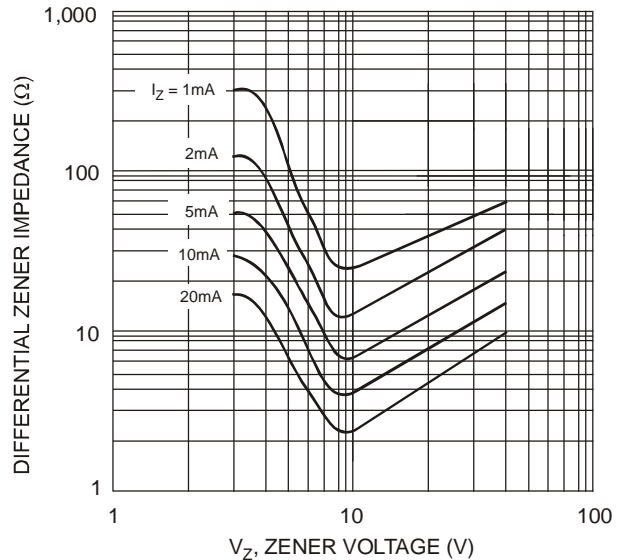


Fig. 4 Typical Zener Impedance vs. Zener Voltage

Ordering Information (Notes 5 & 6)

| Device | Packaging | Shipping |
|------------------|-------------|----------------|
| (Type Number)-A* | DO-41 Glass | 5K/Ammo Pack |
| (Type Number)-T* | DO-41 Glass | 5K/Tape & Reel |

- Notes: 5. *Add "-A" or "-T" to the appropriate type number in Electrical Characteristics Table. Example: 6.2V Zener = 1N4735A-A for ammo pack.
6. For packaging details, visit our website at <http://www.diodes.com/datasheets/ap02008.pdf>

IMPORTANT NOTICE

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.