



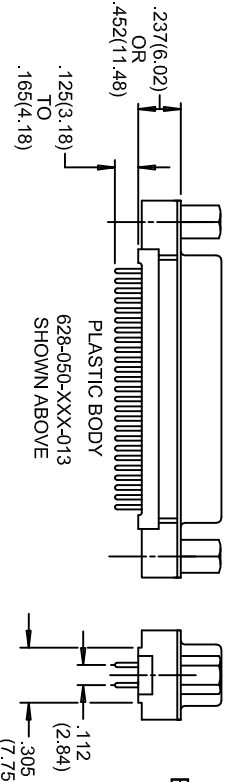


THIS IS A C.A.D. GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO MASTER.

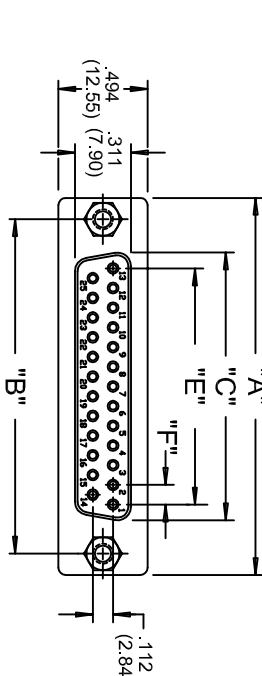

ISSUE NUMBER
ORIGINAL

1

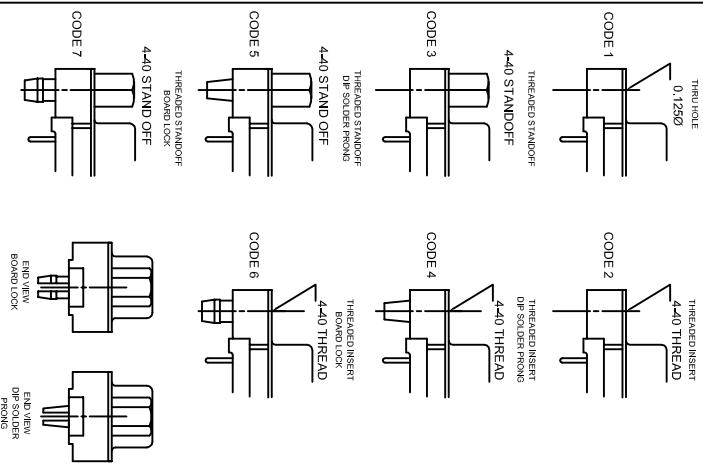

MATERIALS:

INSULATOR: THERMOPLASTIC POLYESTER, UL94V-0
CHEMICAL RESISTANCE, COLOR BLACK
SHEET: STEEL, NICKEL PLATED
CONTACT: PHOSPHOR BRONZE
SELECTIVE GOLD PLATING WITH TIN PLATING ON TAILS

ELECTRICAL:

CURRENT RATING: 5 AMPERES
DIELECTRIC WITHSTANDING VOLTAGE: 1000VAC rms AT SEA LEVEL
INSULATION RESISTANCE: 5000 MEGOHMS MIN.
CONTACT RESISTANCE: 10 MILLIOHMS MAX.
WORKING TEMPERATURE: -55° TO +125° C




THIS SERIES FULLY CONFORMS TO THE
EUROPEAN UNION DIRECTIVES 2002/95/EC
AND 2002/96/EC FOR ROHS COMPLIANCY.

NOTE: ALL CONNECTORS WITH THREADED INSERTS MUST WITHSTAND
A MIN. TORQUE OF 3 Kgf.cm

ORDERING CODE

628-025-320-041

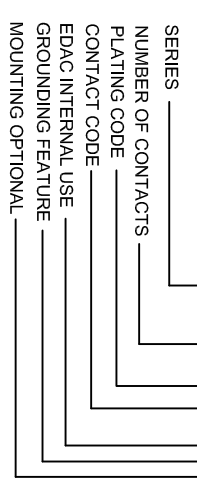

NUMBER OF CONTACTS	"A"	"B"	"C"	"E"	"F"
	Inch (mm)	Inch (mm)	Inch (mm)	Inch (mm)	Inch (mm)
9	1.214 (30.84)	.984 (24.99)	.642 (16.30)	.432 (10.97)	.108 (2.74)
15	1.545 (39.24)	1.312 (33.32)	.971 (24.66)	.756 (19.20)	.108 (2.74)
25	2.088 (53.04)	1.852 (47.04)	1.511 (38.38)	1.304 (33.12)	.109 (2.76)
37	2.730 (69.34)	2.500 (63.50)	2.159 (54.84)	1.956 (49.68)	.109 (2.76)
50	2.635 (66.93)	2.406 (61.11)	2.064 (52.43)	1.744 (49.68)	.109 (2.76)

628 SERIES SUBMINIATURE D CONNECTOR

RECEPTACLE(SOCKET) VERTICAL PCB

DRAWN: NSONDHH	DATE: JUL. 12/12
CHECKED:	DATE:
PART NUMBER	SEE ORDERING CODE
DRAWING NUMBER	628-000-008
ISSUE	1



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC. AND SHALL NOT BE REPRODUCED OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

YOUR CONNECTION TO QUALITY & SERVICE

- THROUGH HOLE**
0.1250
- THREADED INSERT**
4-40 THREAD
- THREADED STANDOFF**
4-40 STANDOFF
- THREADED STANDOFF DP SOLDER PRONG**
4-40 STAND OFF
- THREADED INSERT DP SOLDER PRONG**
4-40 THREAD
- THREADED STANDOFF DP SOLDER PRONG**
4-40 STAND OFF
- THREADED STANDOFF BOARD LOCK**
4-40 STAND OFF
- END VIEW BOARD LOCK**
- END VIEW DP SOLDER PRONG**
- PLATING CODE**
2 GOLD FLASH
3 15 MICRONS GOLD
6 30 MICRONS GOLD
- CONTACT CODE**
20 PC TAILS .125" (3.18) LONG
21 PC TAILS .165" (4.20) LONG HIGH PROFILE ONLY
22 SOLDER CUP TERMINATION
28 2.8mm FERRITE FILTOR
- EDAC INTERNAL USE**
0 INDICATE GENERIC INTERNAL CODE
- GROUNDING FEATURE**
1 PLASTIC .237 (6.02) LOW PROFILE POLYESTER
3 PLASTIC .452 (11.48) HIGH PROFILE POLYESTER
4 METAL COVERED .276 (7.00) LOW PROFILE
5 METAL COVERED .472 (12.00) HIGH PROFILE
- MOUNTING OPTION**
1 0.125(3.18) DIA. THROUGH HOLE
2 #4-40 UNC THREADED INSERT
3 #4-40 UNC HEX THREADED INSERT
4 #4-40 UNC THREADED INSERT WITH SOLDER PRONGS
5 #4-40 UNC THREADED STANDOFF WITH SOLDER PRONGS
6 #4-40 UNC THREADED INSERT WITH BOARD LOCKS
7 #4-40 UNC THREADED STANDOFF WITH BOARD LOCKS
8 #4-40 UNC THREADED FIXED STANDOFF