


PERFORMANCE CHARACTERISTICS

CURRENT RATING 1.5 A AT 20°C (FULLY LOADED)
1 A AT 70°C (FULLY LOADED)

RATED VOLTAGE 500V AC (CONT / CONT)
OPERATING TEMPERATURE -55°C TO 125°C
CONTACT RESISTANCE 20 MΩ MAX
INSERTION FORCE :0.75 N MAX /CONT
EXTRACTION FORCE: 0.15 N MIN /CONT
INSULATION RESISTANCE :10⁴ MΩ MIN

NOTES

- LEAD FREE INDICATOR : LF- LEAD FREE
- PERFORMANCE LEVEL INDICATOR (REF DWG No. BS,C,201844,003)
THIS PRODUCT IS CSA APPROVED
THIS PRODUCT IS UL RECOGNISED
- FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING: BSA,201,572001
- THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVE AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

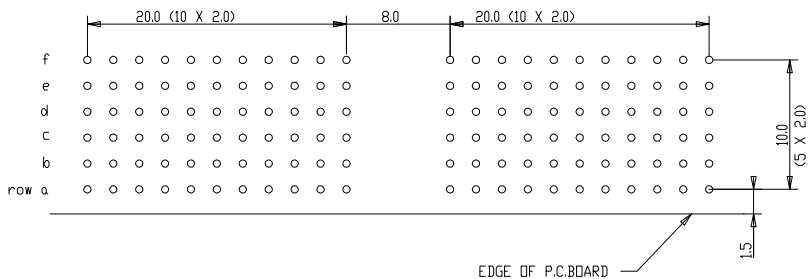

Material				Spec.ref		tolerance	projection	MM				
Mat code				✓		±0.1	±0.1	±0.1				
Heat treat												
Plating/Finish												
rev	ecn no	dr	date	Dr	4 2 92	W.Paris	Product family	MILLIPACS	size	A1	Scale	5.000
A	CONVERSION	KN	14-9-01	Eng			Model Name	HM2R10P5A101----	ECN			
B	105-0093	MINI	08/06/05	Chr			Model Revision		REL Level			
C	3005-0278	KASIN	02/08/05	Appr								
D	3007-0362	Kason	05/09/07									
E	EG00-0010	NZ	05/30/10									
FCI				Title		MPACS 5+2R RA RCP		BS,C,201444,008		Rev.		E
Prd/E file				catalog no		HM2R10P5A101----		CUSTOMER DRAWING		sheet 1 of 1		