
1 | 2

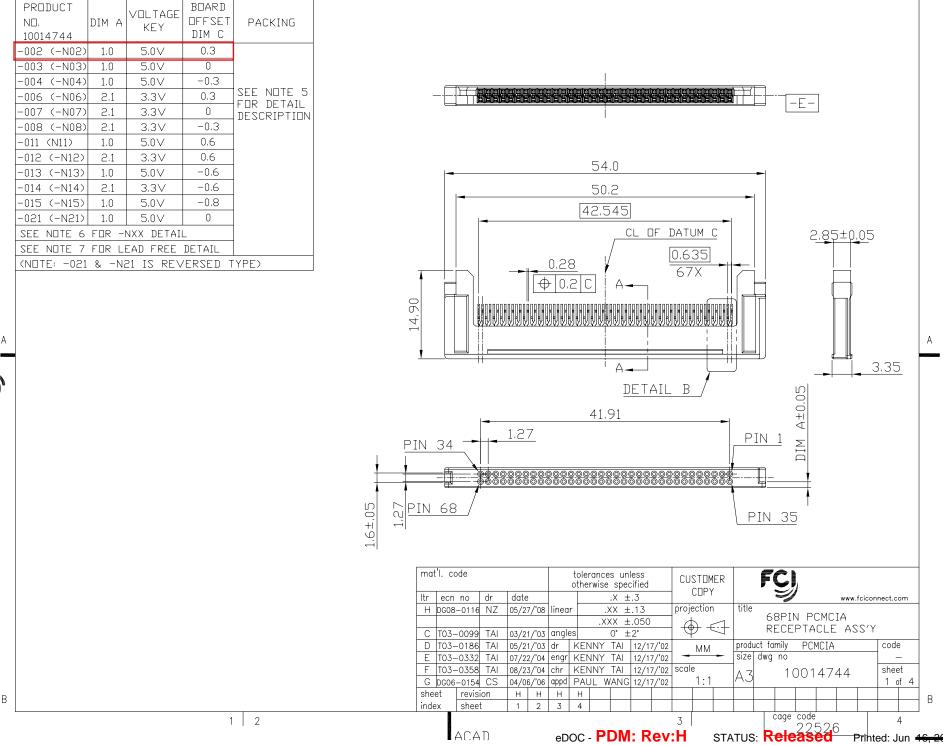


ACAD


3

eDOC - PDM: Rev:H

Printed: Jun 🔫

All rights strictly reserved. Reproduction or is form whatever is not permitted without written Property of FCI. Copyright FCI.

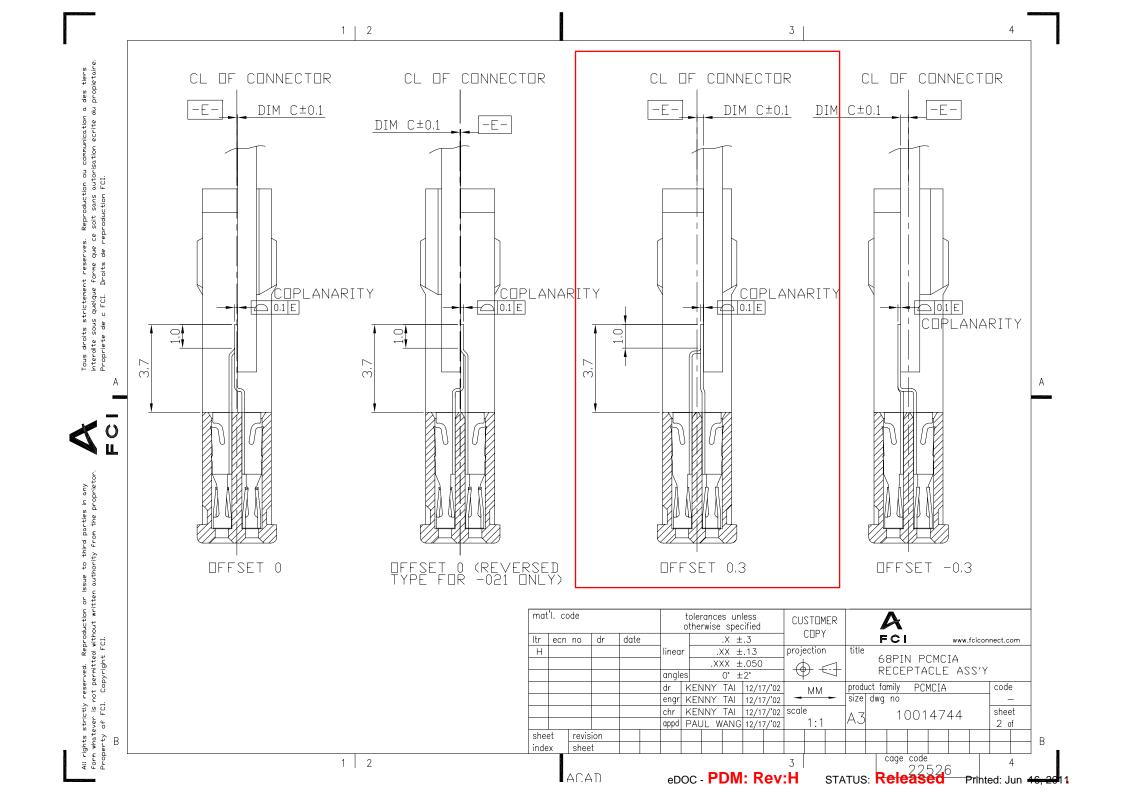

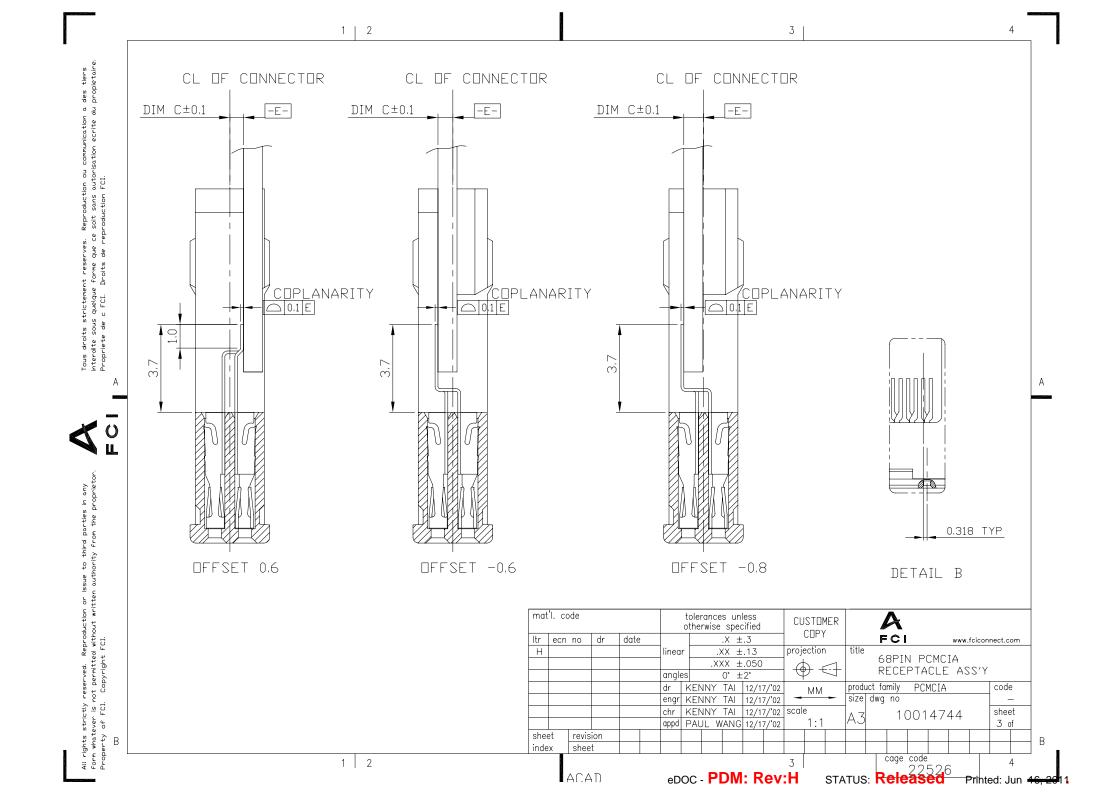

All rights strictly reserved. Reproduction or is form whatever is not permitted without written Property of FCI. Copyright FCI.

- 0.1 A 48.55±.15 - 0.1 A 46.35±.15 = 0.1 A 43.70±.10 42.545 NOTE 2 -A-40±,20 0.635 0.35±.02 5,3±,1 |⊕|0.08|A $10.0 \pm .15$ PIN 34 PIN 35 PIN 1 PIN 68 NOTE 4 49.70

RECOMMENDED P.C.B. LAYOUT

NOTE:

1. MATERIAL:

CONTACT: PHBR 0.12t

HOUSING: LCP UL94V-0 (BLACK COLOR: -XXX; NATURAL COLOR: -NXX)

FINISH:

CONTACT: ALL OVER--- Ni UNDER 0.5 MICRON THK.


CONTACT AREA--- Au or GXT 0.38 MICRON THK.

1 | 2

1 | 2

SOLDER TAIL---TIN LEAD 2.5 MICRON THK. 2. MAXIMUM PCB BOW ON THIS DIMENSION IS 0.1mm.

- 3. PACKING SPEC. REFER TO GS-14-723.
- 4. ELIMINATE THE CORNER TO PREVENT INTERFERENCE WITH SOLDER TAIL.
- 5. -XXX (-NXX) USE STD. PACKAGE, 1872 PCS / CARTON; -XXXT (-NXXT) USE TAPE AND REEL, 750 PCS / REEL; -XXXS (-NXXS) USE STD. PACKAGE, 200 PCS / CARTON; -XXXA (-NXXA) USE TAPE AND TEEL, 600 PCS / REEL.
- 6. -NXX USE NATURAL COLOR HOUSING, EX. -N02 IS THE SAME WITH -002 EXCEPT NATURAL COLOR.
- 7. -XXXXLF IS LEAD FREE PLATING, SOLDER TAIL IS PLATED TIN 2.5 MICRON
- 8. PRODUCT SPEC. REFER TO GS-12-228.

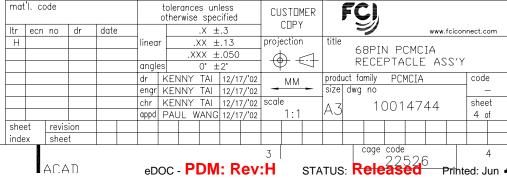

3

ACAD

eDOC - PDM: Rev:H

Printed: Jun

В