

REFERENCE SPECIFICATIONS

-NFC 93425 (in compliance with HE 501)

PHYSICAL CHARACTERISTICS

-INSULATOR MATERIAL: THERMOPLASTIC UL94V0
 -CONTACT MATERIAL: BRASS
 GOLD OVER NICKEL

-ACCESSORIES: BRASS,cadmium plated yellow passivation
 -SHELLS: STEEL,cadmium plated yellow passivation

ELECTRICAL CHARACTERISTICS

-NOMINAL CURRENT: 7.5A
 -CONTACT RESISTANCE: <= 7.3 m ohms
 -CONTACT/CONTACT : >=1000 V
 -CONTACT/GROUND : >=1200 V
 -INSULATION RESISTANCE: >=5000 MOhms

ENVIRONMENTAL CHARACTERISTICS

- CLIMATIC CATEGORY: 55/125/56
 TEMPERATURE RANGE -55°C TO +125°C
 DAMP HEAT STEADY STATE 56 DAYS
 SALT SPRAY 48 HOURS

MECHANICAL CHARACTERISTICS

- RETENTION AGAINST TORQUE: - Threaded insert: 0.7 N.m minimum
 - Female screw : 0.5 N.m minimum

DBML25P300

Series

Shell size: **E A B C D**
 see sheet 2

Front accessory definition
 see sheet 2

- Blank** : without accessory
- F** : floating mounting
- L** : threaded insert M3
- O** : threaded insert UNC 4-40
- V** : female screw UNC 4-40
- S** : spacer

Contact number (see sheet 2)
9,15,25,37,50

Contacts

P : Pin


Termination type

3 : Straight version

Plating

00 : 500 matings/unmatings

43 : 500 matings/unmatings for harsh environment

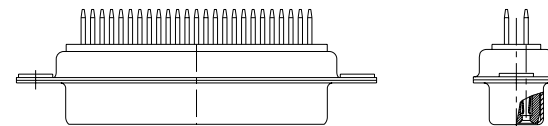

25 WAY for Example

www.fciconnect.com				surface	tolerance std	projection	mm	
				ISO 1302	ISO 406 ISO 1101	mm		
				TOLERANCES UNLESS OTHERWISE SPECIFIED				
Dr	M PESSON	2006/11/14	ANGULAR	0.X	±0.3	size	A2	Scale
Eng	P LEGARE	2006/11/14	LINEAR	0.xx	±0.1	ECN	LS07-0273	2:1
Chr	P LEGARE	2006/11/14	0° ±2°	0.xxx	±0.05			
Appr	P LEGARE	2006/11/14	Product family		- Spec.ref			
SUB MALE DM HE501 series with straight solder contact				cat no	C01-8637-1738	Rev.	B	
catalog no				CUSTOMER		sheet 1 of 4		

Copyright FCJ, FCJ

1 2 3 4 5 6 7 8

A

B

C

D

E

F

A


B

C

D

E

F

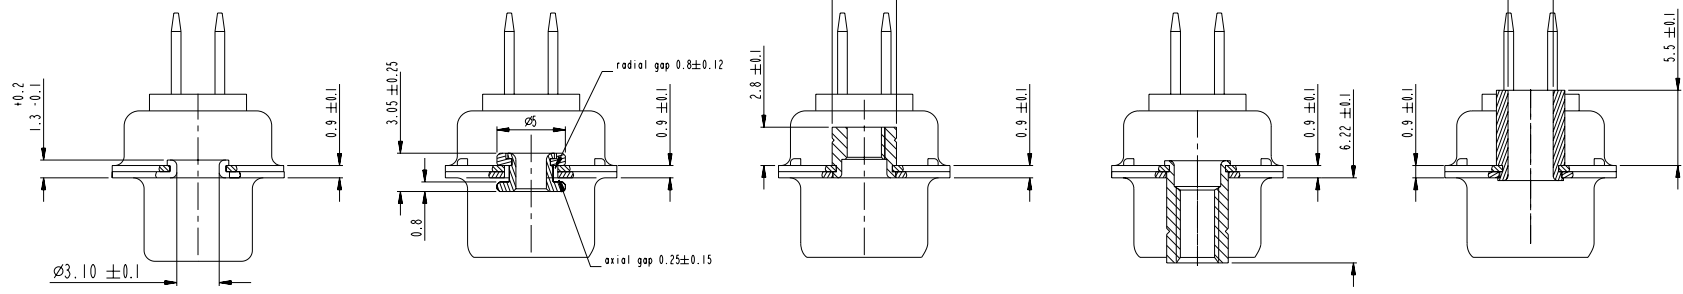

FRONT ACCESSORY **Blank** without **F** floating mounting **L** insert M3 **O** insert UNC 4.40 **V** female screw UNC 4.40 **S** spacer

PART NUMBER	FRONT ACCESSORY
D*MxxP300	without
D*MFxxP300	floating mounting
D*MLxxP300	insert M3
D*MOxxP300	insert UNC 4.40
D*MVxxP300	female screw UNC 4.40
D*MSxxP300	spacer

shell size	Contact number
#	XX
E	09
A	15
B	25
C	37
D	50

PART NUMBER	FRONT ACCESSORY
D*MxxP343	without
D*MFxxP343	floating mounting
D*MLxxP343	insert M3
D*MOxxP343	insert UNC 4.40
D*MVxxP343	female screw UNC 4.40
D*MSxxP343	spacer

CROSS REFERENCES HE501 and FCI

HE501 P/N	FCI P/N	FRONT ACCESSORY
HE501NxxYP4	D*MxxP300	without
HE501FxxYP4	D*MFxxP300	floating mounting

Copyright FCI.


www.fciconnect.com		surface ISO 1302	tolerance std ISO 406 ISO 1101	projection mm
		TOLERANCES UNLESS OTHERWISE SPECIFIED		
Dr	M PESSON	2006/11/14	ANGULAR	0.X ±0.3
Eng	P LEGARE	2006/11/14	LINEAR	0.XX ±0.1
Chr	P LEGARE	2006/11/14	0° ±2°	0.XXX ±0.05
Appr	P LEGARE	2006/11/14	Product family	Spec ref

	SUB MALE DM HE501 series with straight solder contact	dwg no C01-8637-1738	Rev. B
catalog no	CUSTOMER	sheet 2 of 4	

SCALE: 4


REV: 2006-04-17

1 2 3 4 5 6 7 8

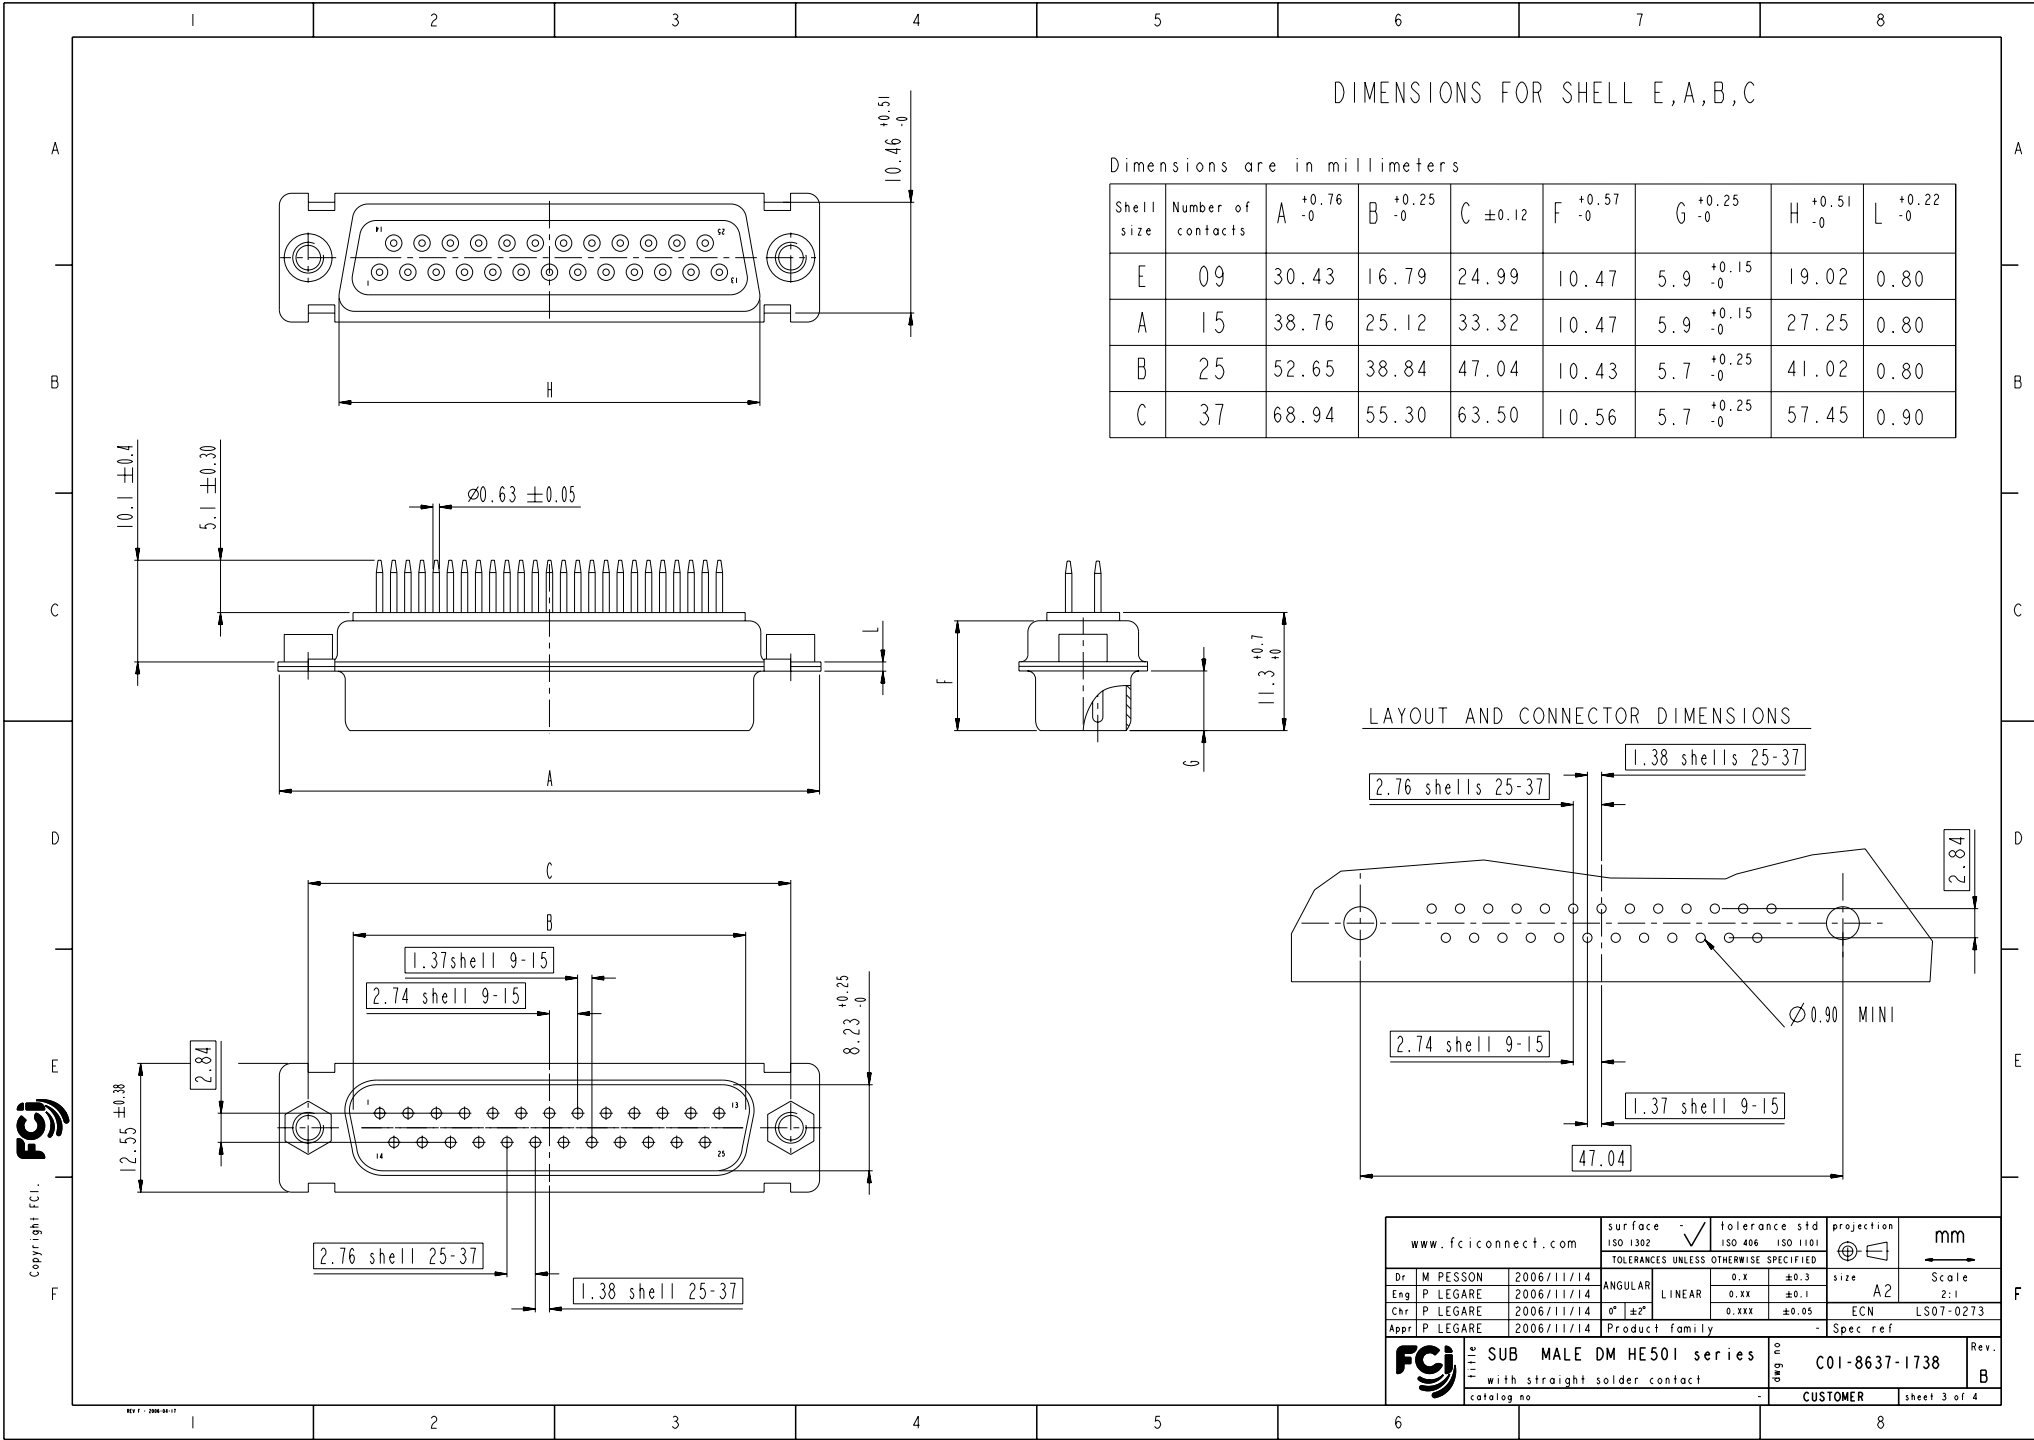

Copyright FCI
FCI

www.fciconnect.com		surface	tolerance std	projection	mm
		ISO 1302	ISO 406 ISO 1101		
		TOLERANCES UNLESS OTHERWISE SPECIFIED			
Dr	M PESSON	2006/11/14	ANGULAR	size	Scale
Eng	P LEGARE	2006/11/14	LINEAR	A2	2:1
Chr	P LEGARE	2006/11/14	Ø ±2	ECN	LS07-0273
Appr	P LEGARE	2006/11/14	Product family	Spec ref	
FCI		SUB MALE DM HE501 series		ang no	Rev.
		with straight solder contact		C01-8637-1738	B
catalog no		CUSTOMER		sheet 3 of 4	

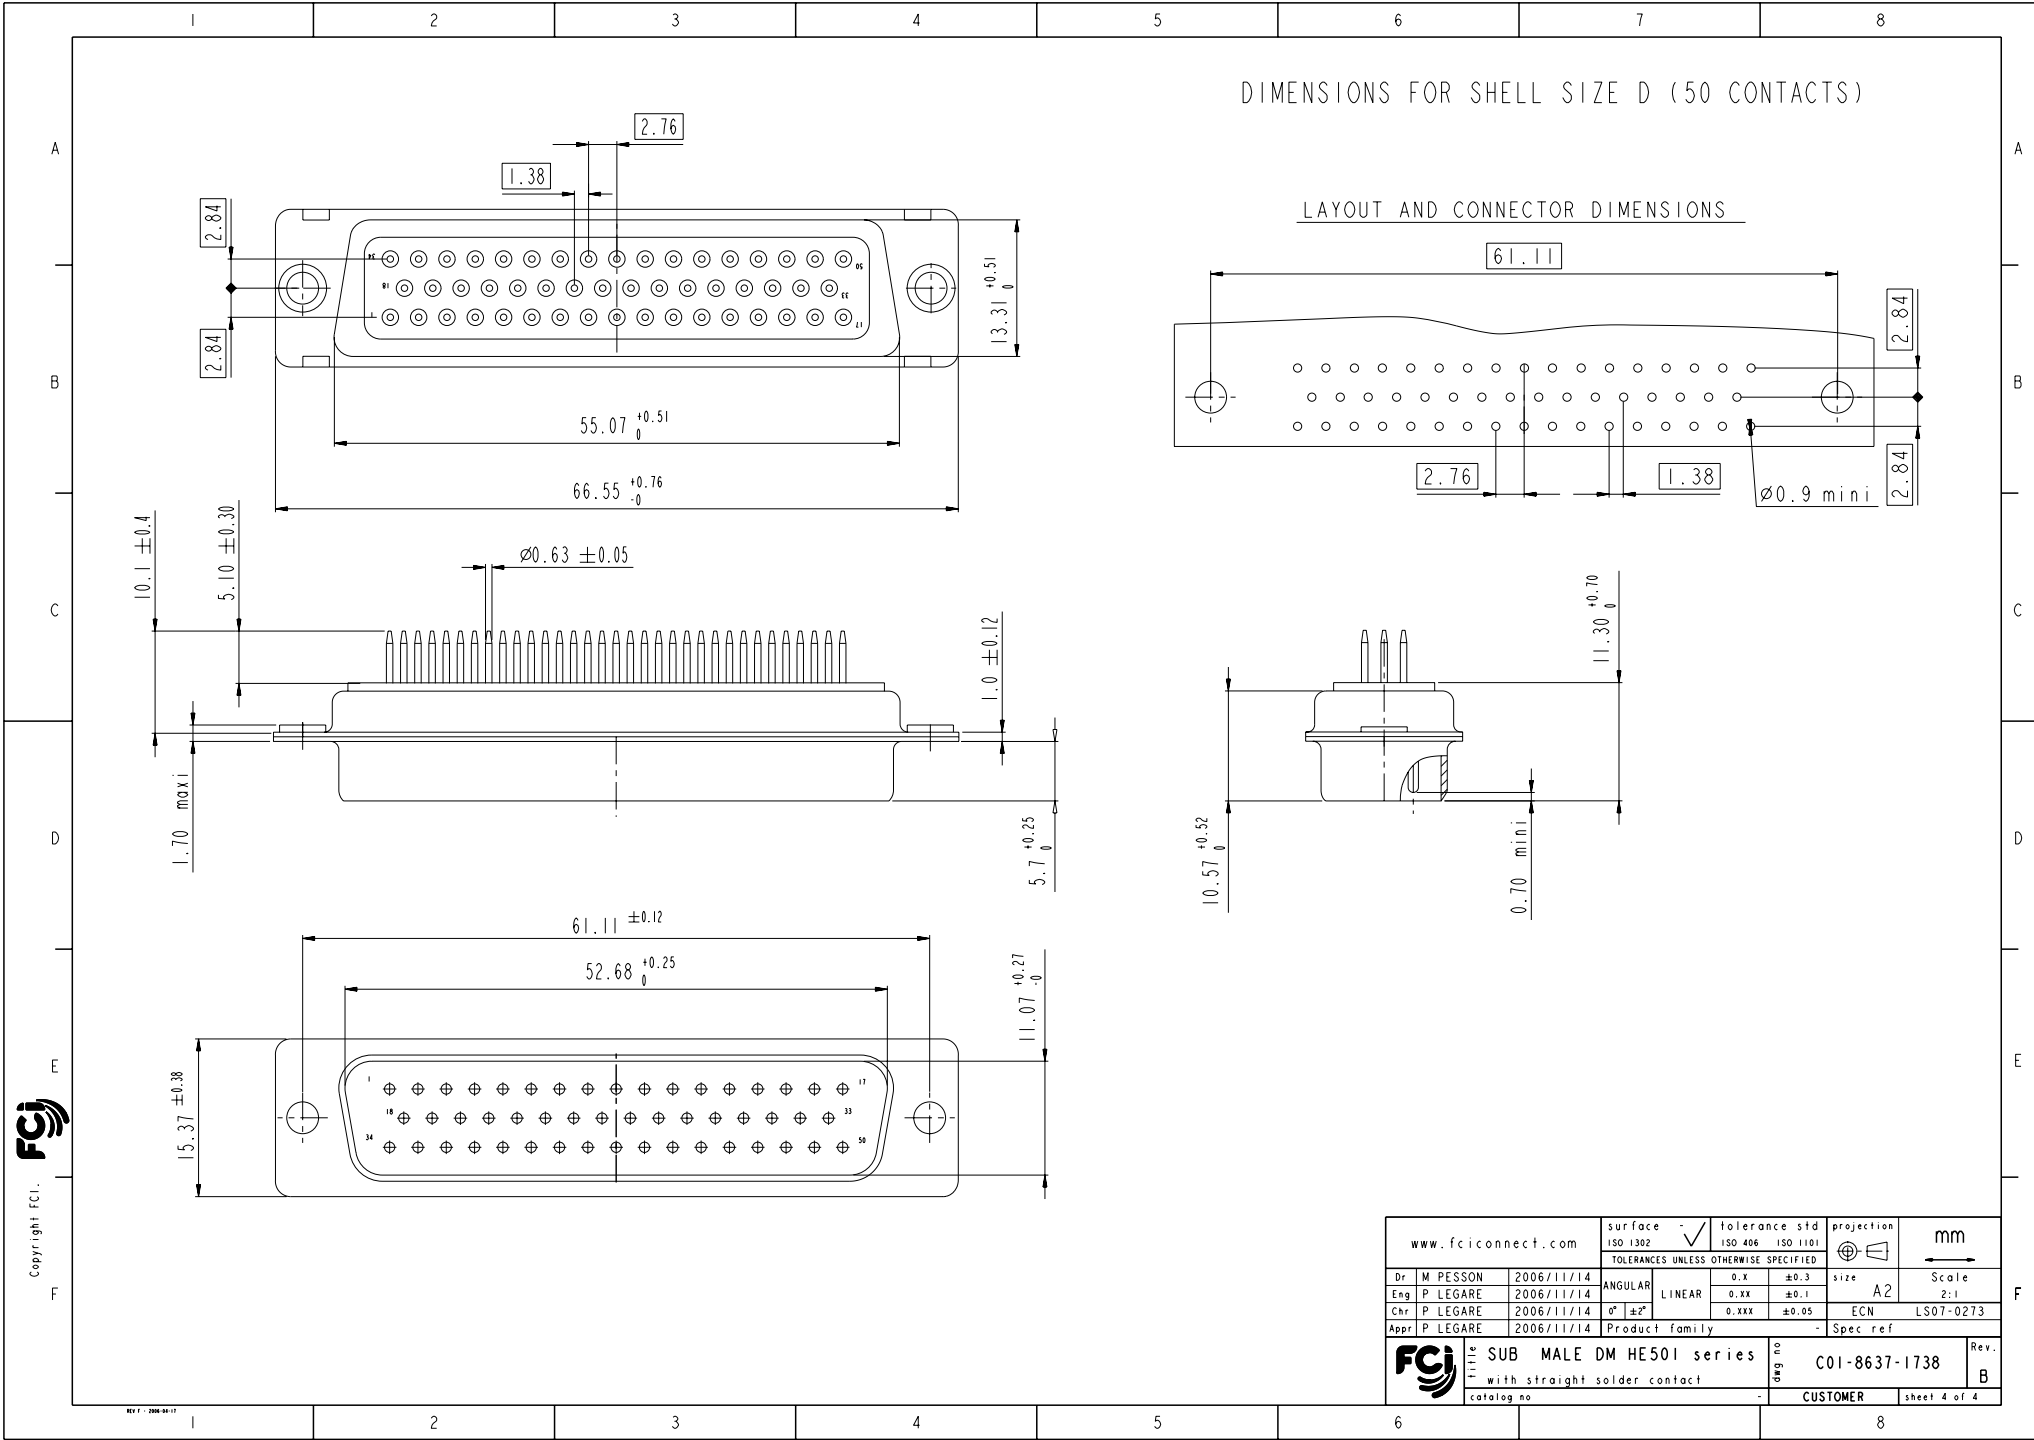

Copyright FCJ

www.fciconnect.com		surface ISO 1302	tolerance std ISO 406 ISO 1101	projection mm
		TOLERANCES UNLESS OTHERWISE SPECIFIED		
Dr	M PESSON	2006/11/14	ANGULAR	size A2
Eng	P LEGARE	2006/11/14	LINEAR	Scale 2:1
Chr	P LEGARE	2006/11/14	\varnothing ± 2	ECN LS07-0273
Appr	P LEGARE	2006/11/14	Product family	Spec ref
SUB MALE DM HE501 series with straight solder contact catalog no		ang no C01-8637-1738	Rev. B	sheet 4 of 4