


1				2		3		4	
PRODUCT NUMBER	SIZE	DIM A	DIM B	PRODUCT NUMBER 69307-0XXLF TOTAL NUMBER OF POS 04 UP TO 50					
69307-004LF	2x2	2.0	4.4						
69307-006LF	2x3	4.0	6.4						
69307-008LF	2x4	6.0	8.4						
69307-010LF	2x5	8.0	10.4						
69307-012LF	2x6	10.0	12.4						
69307-014LF	2x7	12.0	14.4						
69307-016LF	2x8	14.0	16.4						
69307-018LF	2x9	16.0	18.4						
69307-020LF	2x10	18.0	20.4						
69307-022LF	2x11	20.0	22.4						
69307-024LF	2x12	22.0	24.4						
69307-026LF	2x13	24.0	26.4						
69307-028LF	2x14	26.0	28.4						
69307-030LF	2x15	28.0	30.4						
69307-032LF	2x16	30.0	32.4						
69307-034LF	2x17	32.0	34.4						
69307-036LF	2x18	34.0	36.4						
69307-038LF	2x19	36.0	38.4						
69307-040LF	2x20	38.0	40.4						
69307-042LF	2x21	40.0	42.4						
69307-044LF	2x22	42.0	44.4						
69307-046LF	2x23	44.0	46.4						
69307-048LF	2x24	46.0	48.4						
69307-050LF	2x25	48.0	50.4						

- NOTES:
- MATERIAL : PA66 25% GLASSFILLED, UL94V-0 COLOR BLACK.
 - PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHERS REGULATIONS AS DESCRIBED IN GS-47-004.
 - THIS PRODUCT IS NOT INTENDED TO BE EXPOSED TO MANUFACTURING SOLDER PROCESSES.
 - CODING TRIANGLE INDICATES POS 1 WHEN MATED WITH MINITEK HEADER SERIES 98414 / 98417 / 98424 / 98464 / 10072354 / 10074920 AND 10075974.
 - INDICATES POS 1, WHEN MATED WITH SERIES 90309 / 95609 AND 95615.
 - FOR USE WITH MINITEK CRIMP TO WIRE CONTACT 77138 (26-30AWG) AND 10044403 (22-24AWG).
 - PRODUCT SPECIFICATION AS PER 110-036, CONTACT CRIMP RECOMMENDATIONS AS PER GS-20-058.

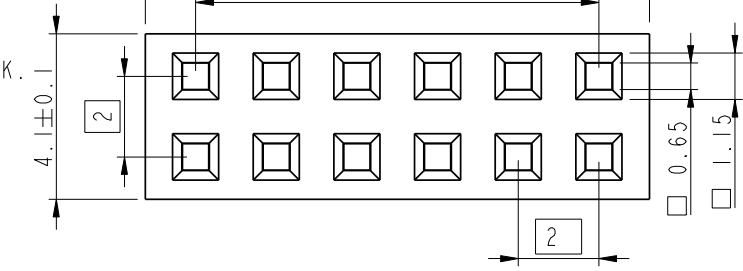

rev				ecn no		dr		date		Material		Spec ref	
P				V08-0392		HTB		2008-09-12		Mat code		surface - ✓ tolerance	
R				F12-0803		JCO		2012-09-03		Heattreat		projection	
-				-		-		-		Plating/Finish		MM	
-				-		-		-		Dr		size A3 Scale 8:1	
-				-		-		-		Eng		Product family	
-				-		-		-		Chr		Model Name 69307-012 ECN	
-				-		-		-		Appr		Model Revision REL Level proj_release	
-				-		-		-		FCI		69307	
-				-		-		-		Title		Rev. R	
-				-		-		-		Pro/E file		CUSTOMER	
-				-		-		-		catalog no		i of i	

TOLERANCES UNLESS OTHERWISE SPECIFIED			
LINEAR	0.X	±0.3	-
	0.XX	±0.13	-
	0.XXX	±0.050	-
ANGULAR	0°	±2°	-