

# Round Cable Suppression Cores

## Cases

Dimensions (*Bold numbers are in millimeters, light numbers are in inches.*)

Part Number Case	Fig.	A	B	C	D	E	Case Material	Part Number Case & 2 Ferrite Parts
0199164251	1	<b>17.9</b> .705	<b>7.0</b> .275	<b>32.3</b> 1.272	<b>9.2</b> .362	<b>9.0</b> .354	Nylon 6/6 Flammability Rating: UL94-V2	0443164251
0199167251	1	<b>22.1</b> .870	<b>10.2</b> .402	<b>32.3</b> 1.272	<b>11.7</b> .461	<b>9.0</b> .354	Nylon 6/6 Flammability Rating: UL94-V2	0443167251
0199164151	1	<b>29.0</b> 1.142	<b>13.4</b> .528	<b>32.5</b> 1.280	<b>14.8</b> .583	<b>18.0</b> .709	Nylon 6/6 Flammability Rating: UL94-V2	0443164151
0199173551	1	<b>29.2</b> 1.150	<b>19.4</b> .764	<b>42.0</b> 1.65	<b>14.7</b> .579	—	Nylon 6/6 Flammability Rating: UL94-V2	0444173551
0199625006	2	<b>24.7</b> .972	<b>7.6</b> .299	<b>22.8</b> .898	<b>10.2</b> .402	<b>17.8</b> .701	Nylon 6/6 Flammability Rating: UL94-V2	0443625006
0199665806	2	<b>26.3</b> 1.035	<b>9.2</b> .362	<b>21.4</b> .843	<b>11.0</b> .433	<b>16.4</b> .646	Nylon 6/6 Flammability Rating: UL94-V2	0443665806
0199800506	2	<b>29.7</b> 1.169	<b>12.8</b> .504	<b>20.6</b> .811	<b>12.7</b> .500	<b>15.6</b> .614	Nylon 6/6 Flammability Rating: UL94-V2	0443800506
0199806406	2	<b>34.3</b> 1.350	<b>15.0</b> .591	<b>21.2</b> .835	<b>15.0</b> .591	<b>16.2</b> .638	Nylon 6/6 Flammability Rating: UL94-V2	0443806406

# Round Cable Suppression Cores

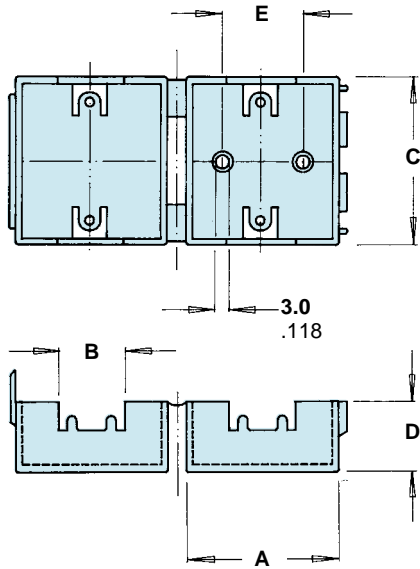


Figure 1

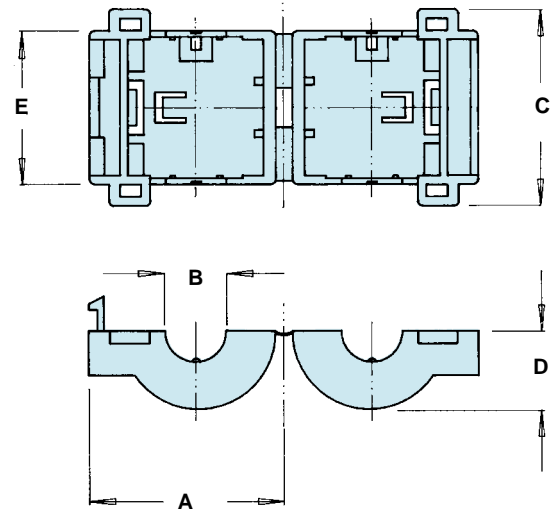


Figure 2