

# AS85049/14S Self-Locking E-Nut





AS85049

B

| CONNECTOR DESIGNATOR: |  |
|-----------------------|--|
| <b>H</b>              | MIL-DTL-38999 Series III & IV<br>EN36455 |

| Finish   |
|--|
| <i>A</i> = Anodize, Black  |
| <i>N</i> = Electroless Nickel                                    |
| <i>W</i> = 1,000 Hour Cadmium Olive Drab over Electroless Nickel |
| <i>X</i> = Nickel Fluorocarbon Polymer                           |
| <i>Y</i> = Pure Dense Electrodeposited Aluminum                  |
| <i>Z</i> = Zinc-Nickel, Black                                    |

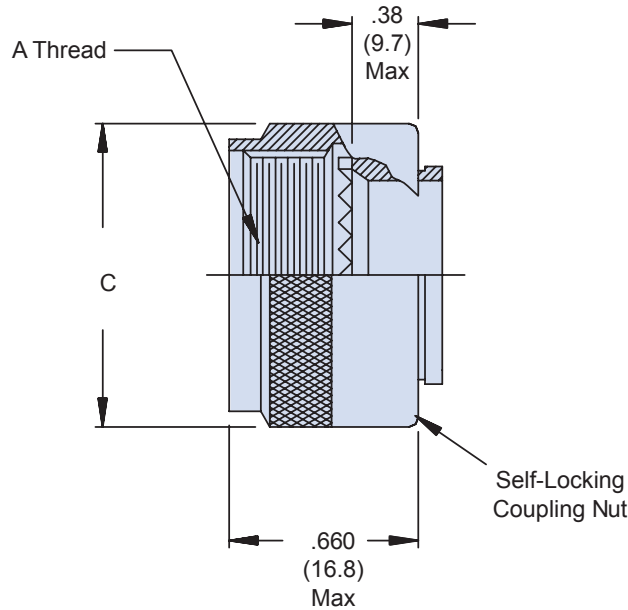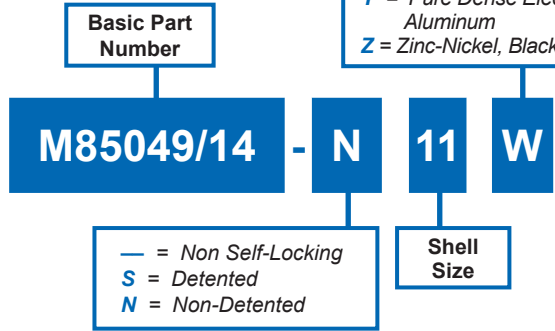

| Shell Size | Shell Size Code Ref. | A Thread Class 2B | Ø C Max |        |
|------------|----------------------|-------------------|---------|--------|
| 9          | A                    | M12 X 1 - 6H      | .86     | (21.8) |
| 11         | B                    | M15 X 1 - 6H      | .98     | (24.9) |
| 13         | C                    | M18 X 1 - 6H      | 1.16    | (29.5) |
| 15         | D                    | 1M22 X 1 - 6H     | 1.28    | (32.5) |
| 17         | E                    | M25 X 1 - 6H      | 1.41    | (35.8) |
| 19         | F                    | M28 X 1 - 6H      | 1.52    | (38.6) |
| 21         | G                    | M31 X 1 - 6H      | 1.64    | (41.7) |
| 23         | H                    | M34 X 1 - 6H      | 1.77    | (45.0) |
| 25         | J                    | M37 X 1 - 6H      | 1.89    | (48.0) |

| APPLICATION NOTES  |
|--|
| 1. For complete dimensions, see the applicable Military Specification. |
| 2. Metric dimensions (mm) are indicated in parentheses.                |

Dimensions in inches (millimeters) and are subject to change without notice.