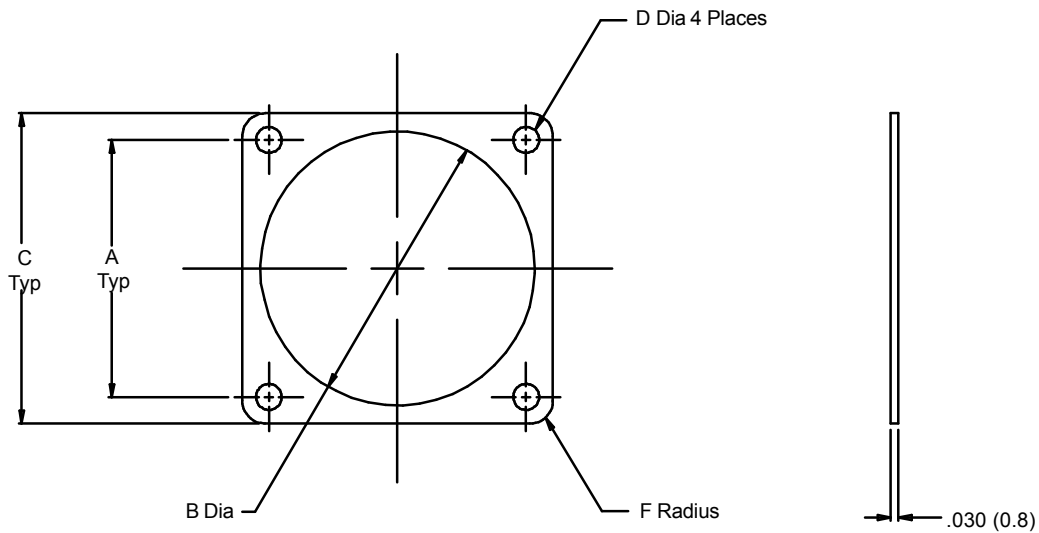


930 - 001 F 02

Product Series _____
Basic Number _____
Dash Number (Table I) _____
Material Symbol (Table II) _____

**NOTES:**

1. Identified by bag and tag in suitable quantities.
2. Metric dimensions (mm) are indicated in parentheses.

930-001
Gasket for Flange Mount
Receptacle Connector



TABLE I: DASH NUMBER

| Dash No. | MIL-DTL-26482, 26500, 83723 | | MIL-DTL-38999 | | A | | B Dia | | C | | D Dia | | F Rad | |
|----------|--------------------------------|------------------|--------------------|---------|----------------|----------------|----------------|----------------|----------------|--|-------|--|-------|--|
| | Series I & III NAS1599 B&T | Series I & II | Series III & IV | AS81703 | ±.005 (0.1) | ±.007 (0.2) | ±.008 (0.2) | ±.005 (0.1) | ±.015 (0.4) | | | | | |
| 01 | 8 | 8 | - | - | .595 (15.1) | .562 (14.3) | .812 (20.6) | .125 (3.2) | .105 (2.7) | | | | | |
| 02 | - | - | - | 3 | .625 (15.9) | .603 (15.3) | .896 (22.8) | .125 (3.2) | .105 (2.7) | | | | | |
| 03 | 10 | 9 & 10 | 9 | 7 | .719 (18.3) | .687 (17.4) | .937 (23.8) | .125 (3.2) | .105 (2.7) | | | | | |
| 04 | 12 | 11 & 12 | 11 | - | .812 (20.6) | .772 (19.6) | 1.031 (26.2) | .125 (3.2) | .105 (2.7) | | | | | |
| 05 | - | - | - | 12 | .812 (20.6) | .828 (21.0) | 1.114 (28.3) | .125 (3.2) | .105 (2.7) | | | | | |
| 06 | 14 | 13 & 14 | 13 | 19 | .906 (23.0) | .937 (23.8) | 1.125 (28.6) | .125 (3.2) | .105 (2.7) | | | | | |
| 07 | 16 | 15 & 16 | 15 | 27 | .969 (24.6) | 1.063 (27.0) | 1.250 (31.8) | .125 (3.2) | .135 (3.4) | | | | | |
| 08 | 18 | 17 & 18 | 17 | - | 1.062 (27.0) | 1.187 (30.1) | 1.343 (34.1) | .125 (3.2) | .135 (3.4) | | | | | |
| 09 | - | - | - | 37 | 1.187 (30.1) | 1.266 (32.2) | 1.458 (37.0) | .125 (3.2) | .135 (3.4) | | | | | |
| 10 | 20 | 19 & 20 | 19 | - | 1.156 (29.4) | 1.312 (33.3) | 1.467 (37.3) | .125 (3.2) | .135 (3.4) | | | | | |
| 11 | 22 | 21 & 22 | 21 | - | 1.250 (31.8) | 1.437 (36.5) | 1.562 (39.7) | .125 (3.2) | .135 (3.4) | | | | | |
| 12 | 24 | 23 & 24 | 23 | - | 1.375 (34.9) | 1.562 (39.7) | 1.703 (43.3) | .152 (3.9) | .135 (3.4) | | | | | |
| 13 | - | - | - | 61 | 1.436 (36.5) | 1.570 (39.9) | 1.799 (45.7) | .125 (3.2) | .135 (3.4) | | | | | |
| 14 | - | 25 | 25 | - | 1.500 (38.1) | 1.600 (40.6) | 1.812 (46.0) | .152 (3.9) | .135 (3.4) | | | | | |

TABLE II: MATERIAL

| Symbol | Material Description |
|----------|--|
| B | Fluorosilicone with Silver Aluminum 84 Shore (Ref) |
| C | Conductive — Metex |
| F | Fluorosilicone |
| M | Conductive — Con-Sil II |
| N | Neoprene |
| S | Silicone |
| V | Viton |

Metric Dimensions (mm) are indicated in parenthesis.