



M28840/8
90° EMI/RFI Environmental Backshell




MIL-DTL
 28840

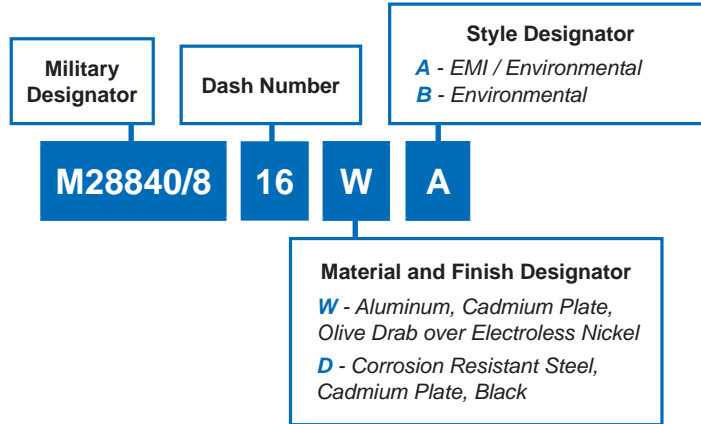

B

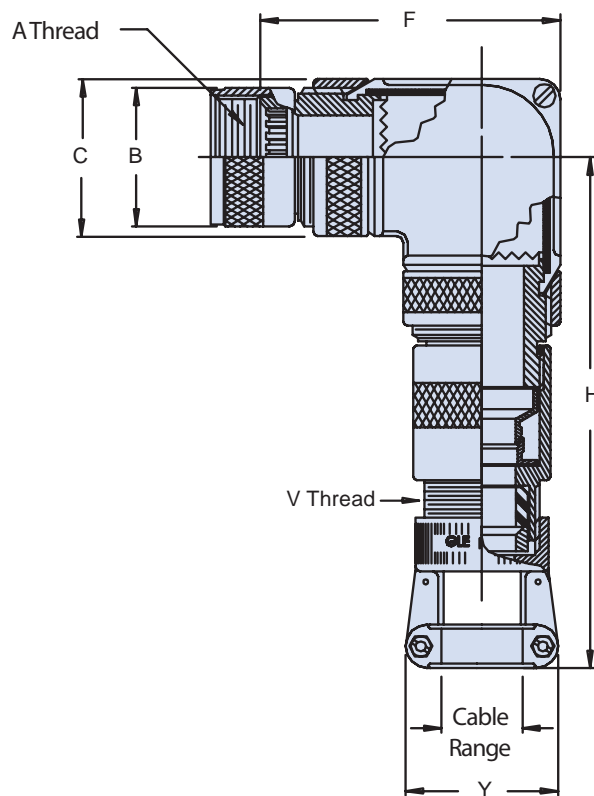

BACKSHELL STYLE A

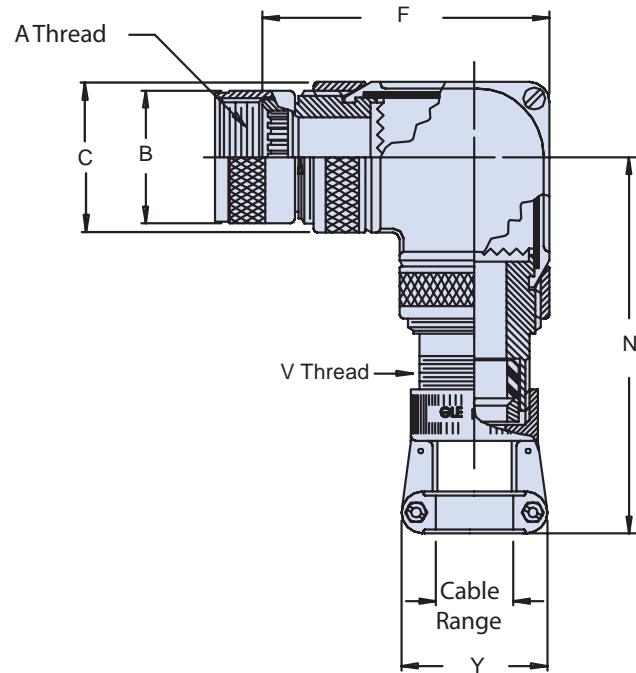

BACKSHELL STYLE B

| Backshell Size | Dash Number | Designator | A Thread Class 2B | B Max. Diameter | C Max. Diameter | D Max. Diameter |
|----------------|-------------|------------|-------------------|-----------------|------------------|-----------------|
| A | 01 | A (11) | .750-20 UNEF | 1.028 (26.11) | 1.188 (30.17) | 1.031 (26.19) |
| A | 02 | B (13) | .875-20 UNEF | 1.141 (28.98) | | |
| B | 03 | B (13) | | | | |
| A | 04 | C (15) | 1.00-20 UNEF | 1.263 (32.08) | 1.438 (36.52) | 1.156 (29.36) |
| B | 05 | C (15) | | | | |
| C | 06 | C (15) | | | | |
| D | 07 | C (15) | | | | |
| A | 08 | D (17) | 1.125-18 UNEF | 1.387 (35.23) | 1.688 (42.87) | 1.281 (32.54) |
| B | 09 | D (17) | | | | |
| C | 10 | D (17) | | | | |
| A | 11 | E (19) | 1.250-18 UNEF | 1.513 (38.43) | | |
| B | 12 | E (19) | | | | |
| A | 13 | F (23) | 1.438-18 UNEF | 1.703 (43.51) | 1.938 (49.22) | 1.406 (35.71) |
| B | 14 | F (23) | | | | |
| C | 15 | F (23) | | | | |
| A | 16 | G (25) | 1.562-18 UNEF | 1.825 (46.35) | | |
| B | 17 | G (25) | | | | |
| C | 18 | G (25) | | | | |
| D | 19 | G (25) | | | | |
| A | 20 | H (29) | 1.875-16 UN | 2.143 (54.43) | 2.188 (54.43) | 1.531 (38.89) |
| B | 21 | H (29) | | | | |

B

M28840/8 90° EMI/RFI Environmental Backshell



MIL-DTL
28840

B

| Backshell Size | Dash Number | Designator | Cable Range | | E Max. Dim. | F Max. Dim. | V Thread Class 2 |
|----------------|-------------|------------|---------------|---------------|---------------|---------------|------------------|
| | | | Max. | Min. | | | |
| A | 01 | A (11) | .312 (7.92) | .188 (4.77) | 1.156 (29.36) | 2.614 (66.40) | .625-24 UNEF |
| A | 02 | B (13) | .312 (7.92) | .188 (4.77) | | | .625-24 UNEF |
| B | 03 | B (13) | .438 (11.12) | .281 (7.14) | | | .750-20 UNEF |
| A | 04 | C (15) | .312 (7.92) | .188 (4.77) | 1.281 (32.54) | 2.864 (72.75) | .625-24 UNEF |
| B | 05 | C (15) | .438 (11.12) | .281 (7.14) | | | .750-20 UNEF |
| C | 06 | C (15) | .562 (14.27) | .344 (8.74) | | | .875-20 UNEF |
| D | 07 | C (15) | .750 (19.05) | .438 (11.12) | 1.406 (35.71) | 3.114 (79.10) | 1.188-18 UNEF |
| A | 08 | D (17) | .625 (15.87) | .375 (9.82) | | | 1.000-20 UNEF |
| B | 09 | D (17) | .750 (19.05) | .438 (11.12) | | | 1.188-18 UNEF |
| C | 10 | D (17) | .938 (23.82) | .625 (15.87) | 1.531 (38.89) | 3.364 (85.45) | 1.438-18 UNEF |
| A | 11 | E (19) | .625 (15.87) | .375 (9.52) | 1.406 (35.71) | | 1.00-20 UNEF |
| B | 12 | E (19) | .938 (23.82) | .625 (15.87) | 1.531 (38.89) | | 1.438-18 UNEF |
| A | 13 | F (23) | .750 (19.05) | .438 (11.12) | 1.406 (25.71) | 3.614 (91.80) | 1.188-18 UNEF |
| B | 14 | F (23) | .938 (23.82) | .625 (15.87) | 1.531 (38.89) | | 1.438-18 UNEF |
| C | 15 | F (23) | 1.188 (30.17) | .812 (20.62) | 1.781 (45.24) | | 1.750-18 UNEF |
| A | 16 | G (25) | .938 (23.82) | .625 (15.87) | 1.531 (38.89) | 1.781 (45.24) | 1.438-18 UNEF |
| B | 17 | G (25) | 1.188 (30.17) | .812 (20.62) | 1.750-18 UNS | | |
| C | 18 | G (25) | 1.250 (31.75) | .875 (22.23) | 2.000-16 UNS | | |
| D | 19 | G (25) | 1.380 (35.05) | 1.000 (25.40) | 2.156 (54.76) | 1.781 (45.24) | 1.750-18 UNS |
| A | 20 | H (29) | 1.188 (30.17) | .812 (20.62) | 1.781 (45.24) | | 2.000-18 UNS |
| B | 21 | H (29) | 1.380 (35.05) | 1.000 (25.40) | 2.156 (54.76) | | |

| Backshell Size | Dash Number | Designator | X Ref. Dimension | Y Ref. Dimension | H Max. Style A | N Max. Style B |
|----------------|-------------|------------|------------------|------------------|----------------|----------------|
| A | 01 | A (11) | 1.281 (32.54) | .938 (23.82) | 5.332 (134.43) | 2.962 (75.23) |
| A | 02 | B (13) | | .938 (23.82) | 5.332 (134.43) | 2.962 (75.23) |
| B | 03 | B (13) | | 1.125 (28.57) | 5.332 (134.43) | 2.962 (75.23) |
| A | 04 | C (15) | | .938 (23.82) | 5.457 (138.61) | 3.087 (78.41) |
| B | 05 | C (15) | | 1.125 (28.57) | 5.457 (138.61) | 3.087 (78.41) |
| C | 06 | C (15) | | 1.312 (33.32) | 5.457 (138.61) | 3.087 (78.41) |
| D | 07 | C (15) | | 1.593 (40.62) | 5.682 (144.32) | 3.312 (84.12) |
| A | 08 | D (17) | | 1.312 (33.32) | 5.682 (144.32) | 3.312 (84.12) |
| B | 09 | D (17) | 1.312 (33.32) | 1.593 (40.62) | 5.713 (145.11) | 3.343 (84.91) |
| C | 10 | D (17) | 1.406 (35.71) | 1.750 (44.45) | 5.807 (147.50) | 3.437 (87.30) |
| A | 11 | E (19) | 1.281 (32.54) | 1.312 (33.32) | 5.682 (144.32) | 3.312 (84.12) |
| B | 12 | E (19) | 1.406 (35.71) | 1.750 (44.45) | 5.832 (148.13) | 3.462 (87.93) |
| A | 13 | F (23) | 1.312 (33.32) | 1.593 (40.62) | 5.738 (145.28) | 3.368 (85.55) |
| B | 14 | F (23) | 1.406 (35.71) | 1.750 (44.45) | 5.832 (148.13) | 3.462 (87.93) |
| C | 15 | F (23) | 1.593 (40.46) | 2.093 (53.16) | 6.019 (152.88) | 3.649 (92.68) |
| A | 16 | G (25) | 1.406 (35.71) | 1.750 (44.45) | 5.832 (148.13) | 3.462 (87.93) |
| B | 17 | G (25) | 1.593 (40.46) | 2.093 (53.16) | 6.019 (152.88) | 3.649 (92.68) |
| C | 18 | G (25) | 1.593 (40.46) | 2.093 (53.16) | 6.144 (156.06) | 3.774 (95.86) |
| D | 19 | G (25) | 1.625 (41.28) | 2.343 (59.51) | 6.176 (156.87) | 3.806 (96.62) |
| A | 20 | H (29) | 1.593 (40.46) | 2.093 (53.16) | 6.144 (156.06) | 3.774 (95.86) |
| B | 21 | H (29) | 1.625 (41.28) | 2.343 (59.51) | 6.176 (156.87) | 3.806 (96.62) |

B

M28840/8 90° EMI/RFI Environmental Backshell



MIL-DTL
28840

B

| Backshell Size | Dash Number | Designator | A Thread Class 2B | B Max. Diameter | C Max. Diameter | D Max. Diameter |
|----------------|-------------|------------|-------------------|-----------------|-----------------|-----------------|
| A | 22 | J (33) | 2.062-16 UNS | 2.329 (59.16) | 2.688 (68.26) | 1.781 (45.24) |
| A | 23 | J (33) | | | | |
| B | 24 | A (11) | .750-20 UNEF | 1.028 (26.11) | 1.188 (30.17) | 1.031 (26.19) |
| C | 25 | A (11) | | | 1.438 (36.52) | 1.156 (29.36) |
| C | 26 | B (13) | .875-20 UNEF | 1.141 (28.98) | 1.688 (42.87) | 1.281 (32.54) |
| D | 27 | B (13) | | | | |
| E | 28 | C (15) | 1.000-20 UNEF | 1.263 (32.08) | | |

| Backshell Size | Dash Number | Designator | Cable Range | | E Max. Dimensions | F Max. Dimensions | V Thread Class 2 |
|----------------|-------------|------------|---------------|---------------|-------------------|-------------------|------------------|
| | | | Max. | Min. | | | |
| A | 22 | J (33) | 1.380 (35.05) | 1.000 (25.40) | 2.281 (57.94) | 4.114 (104.50) | 2.000-18 UNS |
| A | 23 | J (33) | 1.625 (41.26) | 1.250 (31.75) | | | 2.250-16 UNS |
| B | 24 | A (11) | .438 (11.12) | .281 (7.14) | 1.156 (29.36) | 2.614 (66.40) | .750-20 UNEF |
| C | 25 | A (11) | .562 (14.27) | .344 (8.74) | 1.281 (32.54) | 2.864 (72.75) | .875-20 UNEF |
| C | 26 | B (13) | .562 (14.27) | .344 (8.74) | | | |
| D | 27 | B (13) | .625 (15.87) | .375 (9.52) | 1.406 (35.71) | 3.114 (79.10) | 1.000-20 UNEF |
| E | 28 | C (15) | .625 (15.87) | .375 (9.50) | | | |

| Backshell Size | Dash Number | Designator | X Ref. Dimensions | Y Ref. Dimensions | H Max. Style A | N Max. Style B |
|----------------|-------------|------------|-------------------|-------------------|----------------|----------------|
| A | 22 | J (33) | 1.625 (41.28) | 2.343 (59.51) | 6.426 (163.22) | 4.056 (103.02) |
| A | 23 | J (33) | 1.900 (48.26) | 2.750 (59.85) | 6.701 (170.21) | 4.33 (110.01) |
| B | 24 | A (11) | 1.281 (32.54) | 1.125 (28.57) | 5.332 (135.43) | 2.962 (75.23) |
| C | 25 | A (11) | | 1.312 (33.32) | 5.457 (138.61) | 3.087 (78.41) |
| C | 26 | B (13) | | | 5.457 (138.61) | 3.087 (78.41) |
| C | 27 | B (13) | | 5.682 (144.32) | 3.312 (84.12) | |
| B | 28 | C (15) | | 5.682 (144.32) | 3.312 (84.12) | |