




Heyco® -Tite Brass Liquid Tight Cordgrips


Straight Thru, NPT Hubs

The Ultimate in Liquid Tight Strain Relief Protection

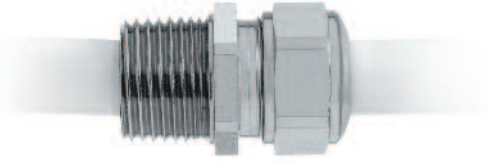

CABLE DIA. RANGE				PART NO.	THREAD SIZE	UL or RA	PART DIMENSIONS							
Minimum		Maximum					A Clearance Hole Dia.		B Max. O.A. Length		C Thread Length		D Wrenching Nut Flat Size	
in.	mm.	in.	mm.				in.	mm.	in.	mm.	in.	mm.	in.	mm.
.118	3,0	.157	4,0	4560 4561	NPT 1/8	cULus	.445	11,3	.91	23,0	.31	8,0	.51	13,0
.157	4,0	.236	6,0				.540	13,7	1.14	29,0	.47	12,0	.59	15,0
.138	3,5	.197	5,0	4562 4563 4564	NPT 1/4	cULus	.680	17,3	1.26	32,0	.47	12,0	.71	18,0
.197	5,0	.256	6,5				.540	13,7	1.14	29,0				
.256	6,5	.315	8,0				.680	17,3	1.34	34,0				
.138	3,5	.177	4,5	4565 4566 4567	NPT 3/8	cULus	.875	22,2	1.42	36,0	.59	15,0	.94	24,0
.177	4,5	.236	6,0				.875	22,2	1.50	38,0				
.236	6,0	.315	8,0				.875	22,2	1.50	38,0				
.315	8,0	.413	10,5	4568	NPT 3/8	cULus	.680	17,3	1.34	34,0				
.236	6,0	.315	8,0	4569 4570	NPT 1/2	cULus	1.040	26,4	1.69	43,0	.59	15,0	1.18	30,0
.315	8,0	.433	11,0				1.040	26,4	1.69	43,0				
.433	11,0	.591	15,0	4571	NPT 1/2	cULus	.875	22,2	1.50	38,0				
.374	9,5	.492	12,5	4572 4573 4574	NPT 3/4	cULus	1.326	33,7	1.89	48,0	.79	20,0	1.42	36,0
.492	12,5	.630	16,0				1.326	33,7	1.89	48,0				
.630	16,0	.807	20,5				1.326	33,7	1.89	48,0				
.551	14,0	.669	17,0	4575 4576 4577	NPT 1	cULus	1.680	42,7	2.01	51,0	.79	20,0	1.81	46,0
.669	17,0	.827	21,0				1.680	42,7	2.01	51,0				
.827	21,0	1.004	25,5				1.680	42,7	2.01	51,0				
.787	20,0	.945	24,0	4578 4579 4580	NPT 1-1/4	cULus	1.920	48,8	2.20	56,0	.87	22,0	2.17	55,0
.945	24,0	1.122	28,5				1.920	48,8	2.20	56,0				
1.122	28,5	1.299	33,0				1.920	48,8	2.20	56,0				
1.142	29,0	1.299	33,0	4581 4582 4583	NPT 1-1/2	cULus	2.400	61,0	2.32	59,0	.87	22,0	2.76	70,0
1.299	33,0	1.457	37,0				2.400	61,0	2.32	59,0				
1.457	37,0	1.614	41,0				2.400	61,0	2.32	59,0				
1.378	35,0	1.575	40,0	4584 4585 4586	NPT 2	cULus								
1.575	40,0	1.811	46,0											
1.811	46,0	2.047	52,0											

- Nickel plated brass construction for superior protection of flexible cables.
- Nickel-plated finish over brass provides excellent corrosion resistance and durability.
- IP 68 rated.
- For use in clearance or threaded holes.
- Long NPT threads provide additional threads for easy locknut assembly.
- Multiple sizes for flexible cord diameters ranging from .118" (3,0 mm) to 2.047" (52,0 mm).
- We recommend using the smallest cordgrip that accommodates your cable size.
- Sealing gland is molded in Thermoplastic Polymer Elastomer (TPE) Material.
- **Locknuts not included.** For metal locknut specifications or to order locknuts separately, see page 3-46.
- DFARS Compliant

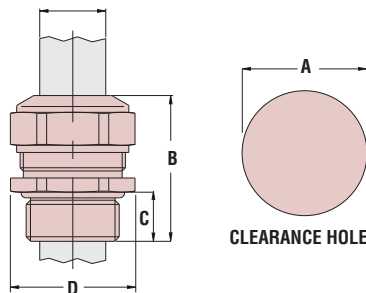

Material	Nickel-Plated Brass w/TPE Sealing Gland
Certifications	cULus Certified by UL for Compliance with both Canadian and U.S. requirements Under File E51579.
	cRAus Recognized under the Component Program of Underwriters' Laboratories File E51579 to both Canadian and U.S. requirements.
Temperature Range	-40°F (-40°C) to 212°F (100°C)
IP Rating	IP 68, IP 69K

Quick Specs