




Heyco® Nylon PCB Supports - Imperial Spacing

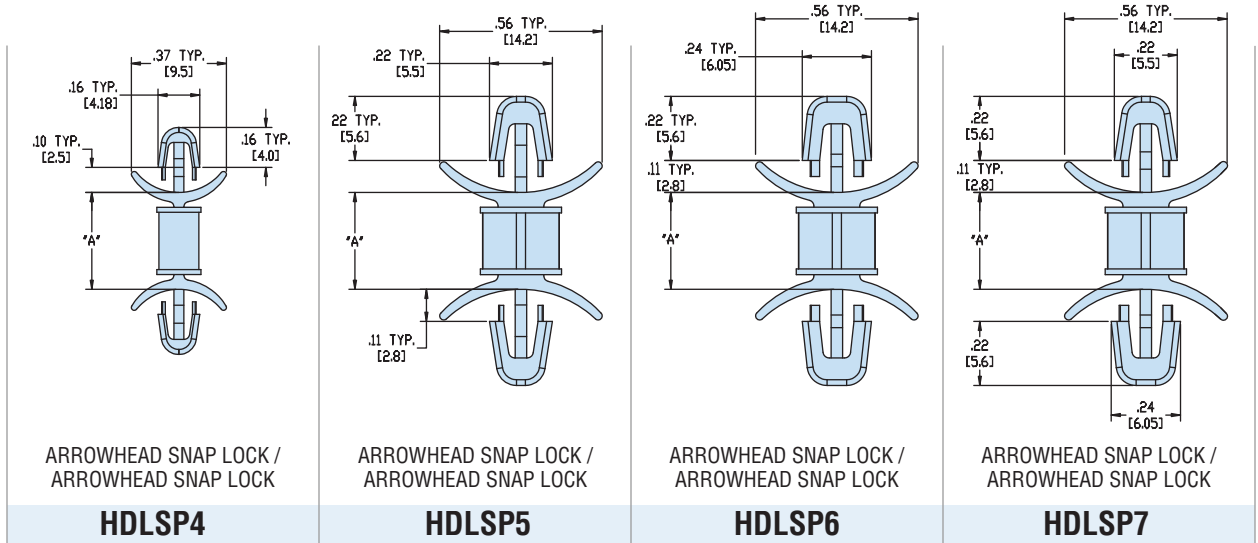

	Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Hole Diameter	
	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.
PCB	.078	2,0	.125	3,2	.078	2,0	.157	4,0	.078	2,0	.187	4,8	.078	2,0	.157	4,0
Chassis	.078	2,0	.125	3,2	.078	2,0	.157	4,0	.078	2,0	.187	4,8	.078	2,0	.187	4,8

A	PART NO.	DESCRIPTION	PART NO.	DESCRIPTION	PART NO.	DESCRIPTION	PART NO.	DESCRIPTION	PART NO.	DESCRIPTION
.187	4,8	10199	HDSP4-03	10209	HDSP5-03	10217	HDSP6-03	10225	HDSP7-03	
.250	6,4	10200	HDSP4-04	10210	HDSP5-04	10218	HDSP6-04	10226	HDSP7-04	
.312	7,9	10201	HDSP4-05							
.375	9,5	10202	HDSP4-06	10211	HDSP5-06	10219	HDSP6-06	10227	HDSP7-06	
.437	11,1	10203	HDSP4-07							
.500	12,7	10204	HDSP4-08	10212	HDSP5-08	10220	HDSP6-08	10228	HDSP7-08	
.562	14,3	10205	HDSP4-09							
.625	15,9	10206	HDSP4-10	10213	HDSP5-10	10221	HDSP6-10	10229	HDSP7-10	
.750	19,1			10214	HDSP5-12	10222	HDSP6-12	10230	HDSP7-12	
.875	22,2	10207	HDSP4-14	10215	HDSP5-14	10223	HDSP6-14	10231	HDSP7-14	

Standard color natural. For special order parts in UL 94V-0 natural material, add the suffix “F” to Part No.

Quick Specs

Material: Nylon 6/6
 Flammability Rating: 94V-2
 Temperature Range: .4°F (-18°C) to 185°F (85°C)