




## HEYClip™ Countersunk Type H Rivets

- Flat, **chamfered rivet head** for **easier disassembly** when required.
- Accommodate countersunk hole specification DIN ISO 7721.
- The "H" type rivet is designed with a flat head for fast and easy installation, without any tools.
- Simply place rivet into the hole and press down on the head to fasten.
- Part Description Key: PRH X-Y where X = Mounting Hole Diameter (inches) and Y = minimum Panel Thickness (inches).
- Standard Material: Nylon 6. Nylon 6/6 UL 94V-0 available by special order, consult Heyco.
- Standard Pack - 1,000/bag.

WILL FIT THESE PANELS						PART NO.			DESCRIPTION	PART DIMENSIONS						EXTRACTION FORCE	
MOUNTING HOLE DIA.		ASSEMBLED PANEL THICKNESS				Black	White	V-0 Black *		A Length		B Head Height		C Head Diameter		N	Style
in.	mm.	Min.	Max.	in.	mm.					in.	mm.	in.	mm.	in.	mm.		
<b>PRH Series</b>																	
.102	2,6	.22	5,5	.26	6,5	<b>9118</b>	<b>9119</b>	<b>9118F</b>	PRH 102-217	.33	8,5	.03	0,7	.18	4,6	49	1
.122	3,1	.04	1,0	.08	2,0	<b>9156</b>	<b>9157</b>	<b>9156F</b>	PRH 122-039	.14	3,5	.04	1,0	.25	6,4	78	1
		.08	2,0	.12	3,0	<b>9158</b>	<b>9159</b>	<b>9158F</b>	PRH 122-079	.18	4,5						
		.12	3,0	.16	4,0	<b>9160</b>	<b>9161</b>	<b>9160F</b>	PRH 122-118	.22	5,5						
		.16	4,0	.19	5,0	<b>9162</b>	<b>9163</b>	<b>9162F</b>	PRH 122-157	.26	6,5						
		.20	5,0	.24	6,0	<b>9164</b>	<b>9165</b>	<b>9164F</b>	PRH 122-197	.31	7,5						
		.22	5,5	.26	6,5	<b>9166</b>	<b>9167</b>	<b>9166F</b>	PRH 122-217	.32	8,0						
		.26	6,5	.30	7,5	<b>9168</b>	<b>9169</b>	<b>9168F</b>	PRH 122-256	.35	9,0						
.30	7,5	.34	8,5	<b>9170</b>	<b>9171</b>	<b>9170F</b>	PRH 122-295	.39	10,0								
.142	3,6	.04	1,0	.08	2,0	<b>9172</b>	<b>9173</b>	<b>9172F</b>	PRH 142-039	.14	3,5	.04	1,0	.25	6,4	118	2
		.08	2,0	.12	3,0	<b>9174</b>	<b>9175</b>	<b>9174F</b>	PRH 142-079	.19	4,5						
		.12	3,0	.16	4,0	<b>9176</b>	<b>9177</b>	<b>9176F</b>	PRH 142-118	.22	5,5						
		.14	3,5	.18	4,5	<b>9178</b>	<b>9179</b>	<b>9178F</b>	PRH 142-138	.24	6,0						
		.18	4,5	.22	5,5	<b>9180</b>	<b>9181</b>	<b>9180F</b>	PRH 142-177	.28	7,0						
		.22	5,5	.26	6,5	<b>9182</b>	<b>9183</b>	-	PRH 142-217	.32	8,0						

Standard colors black and white.  
\*Black nylon 6/6 UL 94V-0.

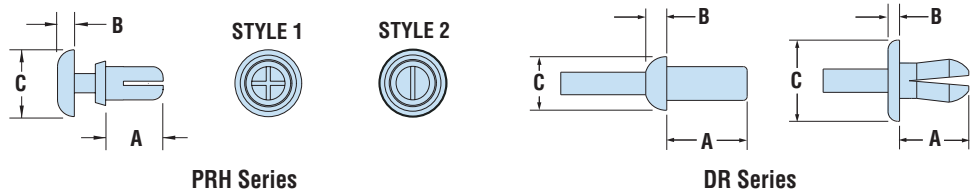

## HEYClip™ Drive Rivets

- Install by placing rivet into hole and pushing the drive pin into the rivet to expand legs and lock in place.
- No tools required.
- Part Description Key: DR X-Y where X = Mounting Hole Diameter (inches) and Y = minimum Panel Thickness (inches).
- Standard Pack - 1,000/bag.

WILL FIT THESE PANELS						PART NO.		DESCRIPTION	PART DIMENSIONS						
MOUNTING HOLE DIA.		ASSEMBLED PANEL THICKNESS				Black	Natural		A Length		B Head Height		C Head Diameter		
in.	mm.	Min.	Max.	in.	mm.				in.	mm.	in.	mm.	in.	mm.	
.161	4,1	.16	4,0	.26	6,5	<b>9331</b>	<b>9332</b>	DR 161-157	.32	8,1	.06	1,5	.30	7,5	<b>NEW!</b>
		.04	1,0	.38	9,5	<b>9184</b>	<b>9185</b>	DR 189-039	.42	10,7	.06	1,5	.28	7,1	
.187	4,8	.16	4,0	.28	7,1	<b>9186</b>	<b>9187</b>	DR 189-158	.38	9,7	.06	1,5	.43	10,9	
		.06	1,5	.28	7,0	<b>9336</b>	-	DR 201-059	.36	9,1	.07	1,8	.33	8,5	<b>NEW!</b>
.218	5,5	.09	2,4	.16	4,0	<b>9188</b>	<b>9189</b>	DR 217-094	.45	11,4	.08	2,0	.37	9,4	
.236	6,0	.12	3,0	.28	7,0	<b>9337</b>	-	DR 236-118	.39	10,0	.08	2,0	.43	10,9	<b>NEW!</b>
		.06	1,5	.25	6,4	<b>9190</b>	<b>9191</b>	DR 252-059	.37	9,3	.19	4,7	.44	11,1	<b>NEW!</b>
.250	6,4	.12	3,0	.28	7,0	<b>9341</b>	-	DR 252-118	.49	12,5	.08	2,0	.47	11,9	<b>NEW!</b>
		.28	7,1	.50	12,7	<b>9192</b>	<b>9193</b>	DR 252-280	.62	15,8					

Standard colors black and natural.  
\*Standard color white.

Material	PRH - Nylon 6	DR - Nylon 6/6
Flammability Rating	94V-2	
Temperature Range	-40°F (-40°C) to 185°F (85°C)	

Quick Specs