MICRO SWITCH
a Honeywell Division
FED.MFG.CODE 91929

SWITCH-BASIC

CATALOG LISTING
14XE1-12

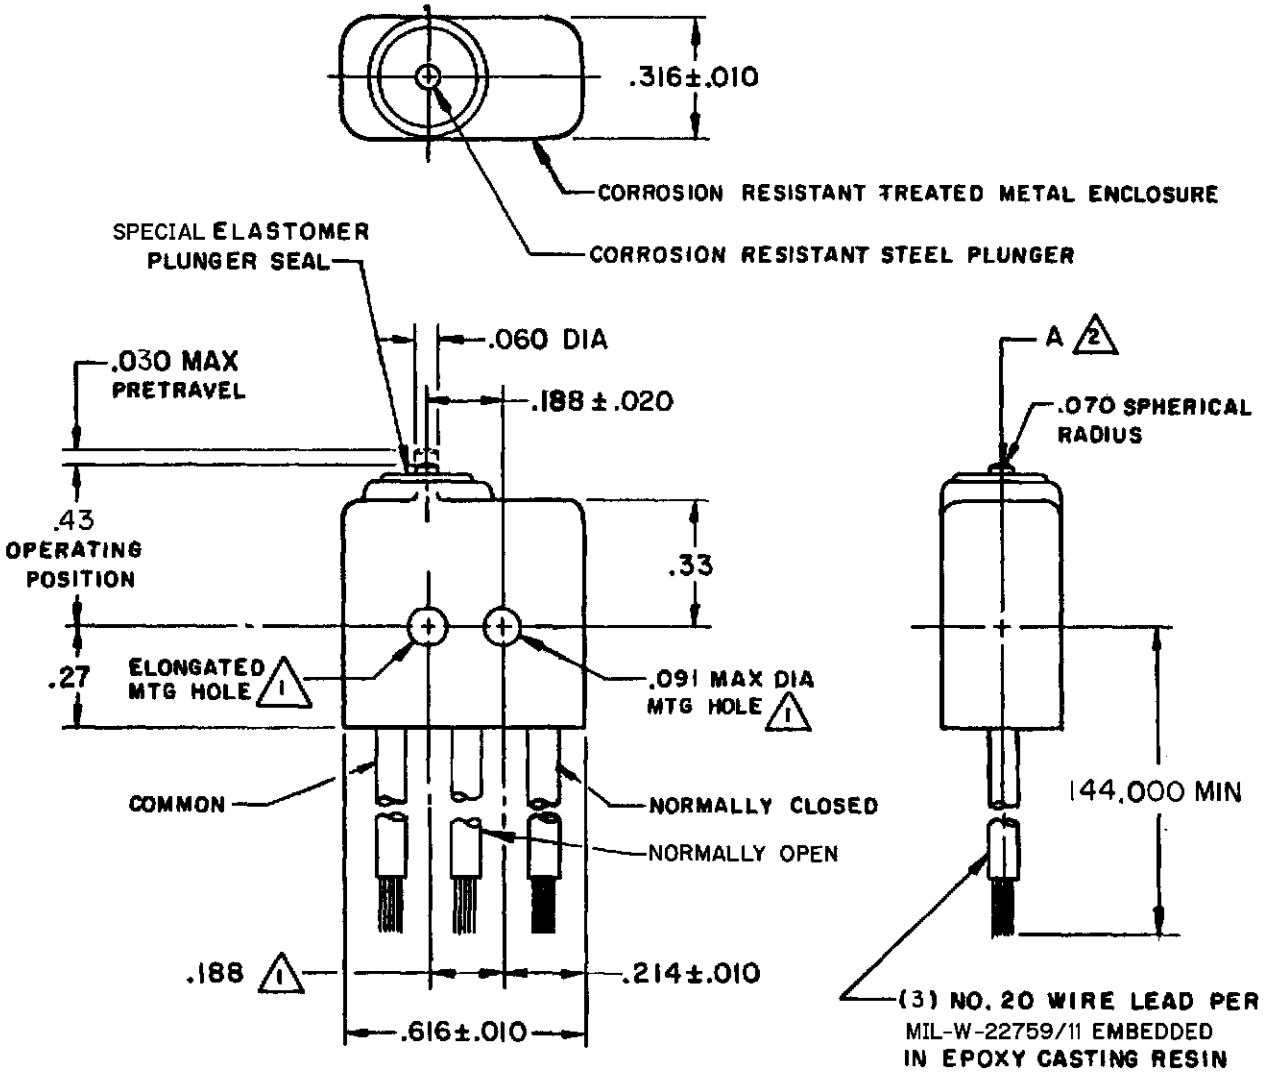

NOTES

1. MOUNTING HOLES WILL ACCEPT .087 MAX DIA PINS OR SCREWS ON .188±.002 CENTERS
2. ACTUATION IN LINE WITH ARROW "A" IS RECOMMENDED
3. WEIGHT OF SWITCH ONLY IS .16 OZ MAX. WEIGHT OF SWITCH WITH WIRE LEADS IS 3.7 OZ MAX
4 - FOR USE IN TEMPERATURE RANGE FROM -65°F TO +300°F

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS	
OPERATING FORCE	9 OZ MAX
RELEASE FORCE	2 OZ MIN
PRETRAVEL	.004 MIN
DIFFERENTIAL TRAVEL	.005 MAX
OVERTRAVEL	.004 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

28 VOLTS DC RATING

INDUCTIVE	SEA LEVEL	4 AMP
	50,000 FT	2.5 AMP
RESISTIVE	SEA LEVEL	7 AMP
	50,000 FT	7 AMP

SCALE — DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT 3

CATALOG LISTING 14XE1-12 PAGE 1 OF 1
ISSUE 2 M
REPLACES
RELEASE NO. PR-13596
CHECK
REVISIONS
A C094274 DLM 16 MAR 99
CHECK
16 MAR 99
JAF
CHECK
16 MAR 99
DRAWN DLM 16 MAR 99
FORMTEK