

MICRO SWITCH
a Honeywell Division



FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

16HM5

CATALOG LISTING
 16HM5
 PAGE 1 OF 1
 RELEASE NO. PR-21325
 REPLACES
 ISSUE 2
 CHECK
 REVISIONS
 A 0020288
 BNA
 22MAR06
 CHECK
 22MAR06
 AS
 CHECK
 4 OCT 94
 DRAWN
 DDM/CAD

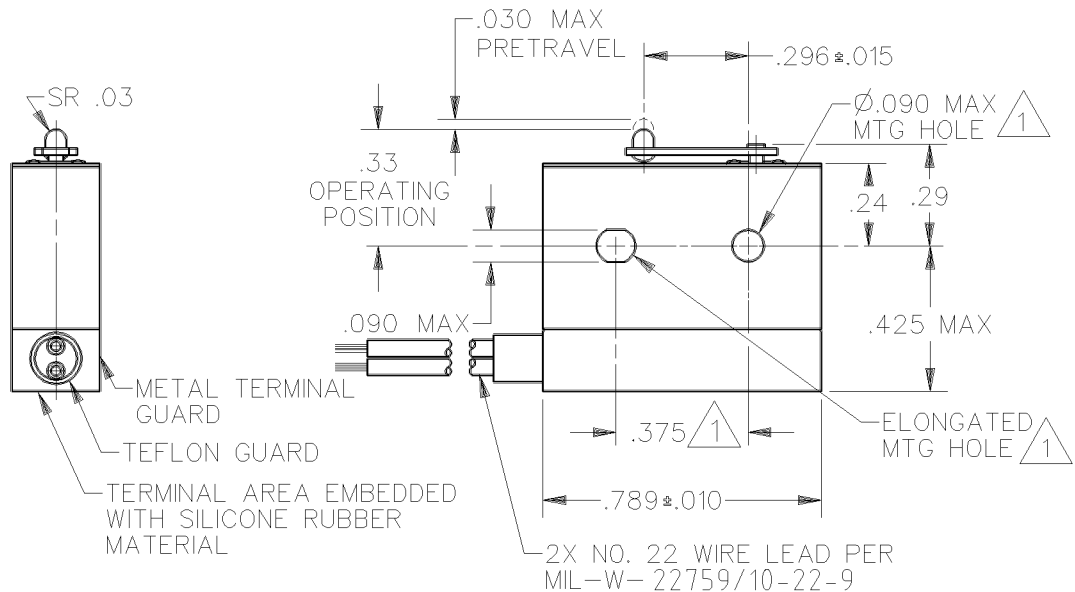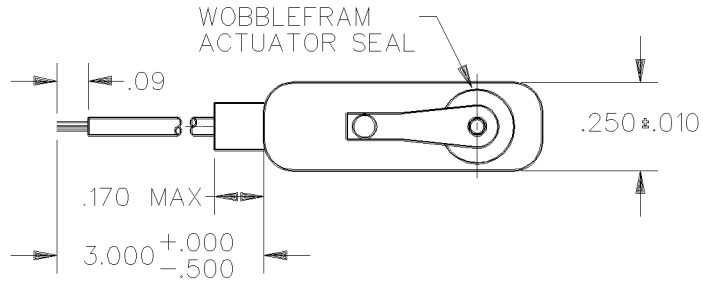


NOTES

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF $\phi .087$ MAX ON $.375 \pm .002$ CENTERS
- 2 - FOR USE IN TEMPERATURE RANGE -85°F TO $+500^{\circ}\text{F}$ (DOWN TO -300°F IF WIRE LEADS ARE NOT FLEXED)
- 3 - HERMETICALLY SEALED (METAL-TO-METAL, GLASS-TO-METAL)
- 4 - ALL EXPOSED PARTS ARE OF CORROSION RESISTANT MATERIALS
- 5 WEIGHT OF SWITCH ONLY IS 0.22 OZ MAX. WEIGHT OF CONDUCTOR GROUP ONLY IS 0.14 OZ MAX PER FOOT
- 6 - DO NOT APPLY MORE THAN 1 1/2 INCH-LBS OF TORQUE WHEN TIGHTENING MOUNTING SCREWS

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA			SCALE 2:1	DO NOT SCALE PRINT
	CONTACT ARRANGEMENT S P N O				
OPERATING FORCE — — — 7 OZ MAX	LINE VOLTAGE	INDUCTIVE LOAD	RESISTIVE LOAD	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
RELEASE FORCE — — — — 1 OZ MIN				ONE PLACE (.0) ±.030	
DIFFERENTIAL TRAVEL --- .0003-.0040	28 VDC	1 AMP	3 AMP	TWO PLACE (.00) ±.015	
OVERTRAVEL — — — — .003 MIN				THREE PLACE (.000) ±.005	
	115 VAC (400 CYCLE)	1 AMP	1 AMP	ANGLES ±	
				WEIGHT /5	