MICRO SWITCH
a Honeywell Division
FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING
1SE105

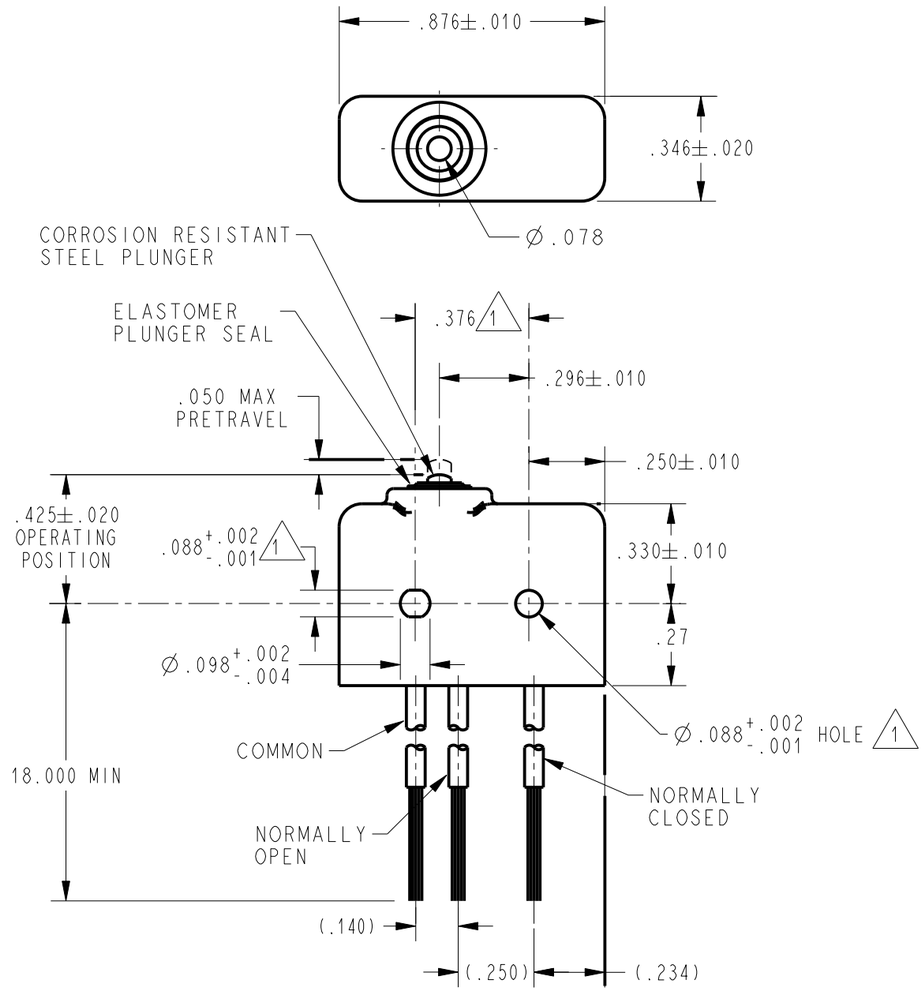

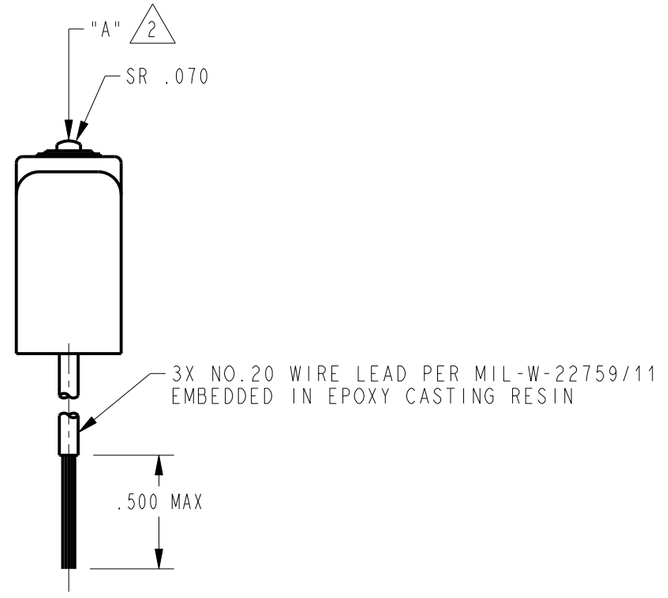

CHARACTERISTICS	
OPERATING FORCE	5-17 OZ
RELEASE FORCE	4 OZ MIN
RELEASE TRAVEL	.004 MIN
DIFFERENTIAL TRAVEL	.004 MAX
OVERTRAVEL	.003 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT

S P D T

250 VAC ---------- 5 AMPS

30 VOLTS DC RATING

INDUCTIVE	SEA LEVEL	3 AMPS
	50,000 FT	2.5 AMPS
RESISTIVE	SEA LEVEL	5 AMPS
	50,000 FT	5 AMPS
MAXIMUM INRUSH		24 AMPS

THIRD ANGLE PROJECTION

SCALE 2:1

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT 3

NOTES
1. MOUNTING HOLES WILL ACCEPT Ø.087 MAX PINS OR SCREWS ON .375±.002 CENTERS
2. ACTUATION IN LINE WITH ARROW "A" IS RECOMMENDED
3. WEIGHT OF SWITCH IS ONLY .26 OZ MAX. WEIGHT OF SWITCH WITH WIRE LEADS IS .70 OZ MAX

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

1SE105 | CATALOG LISTING | PAGE 1 OF 1 | RELEASE NO. PR-19682 | REPLACES -

ISSUE 4

REVISIONS
A 0000759 GLH 22JUL03

	DRAWN	CHECK	CHECK	CHECK	SAV	CHECK
PTC/CAD 2D	GLH	22JUL03		22JUL03		