

# MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY  
FREDERICK, ILLINOIS

FED. MFR. CODE 91929

## SWITCH-BASIC

CATALOG LISTING  
**2SE156-3**

2SE156-3

M

DRAWING NUMBER

X

ISSUE 4

REPLACES

RELEASE NO. SR 11485

CHECK

REVISIONS

A	03-34213	JAL	25 SEPT 74
B	44646	CO	2 DEC 78
C	0057041A	CJH	21 MAR 85

20 FEB 64

EB

CHECK

20 FEB 64


DAW

CHECK

JPH 19 FEB 64

FO-50378

DRAWN

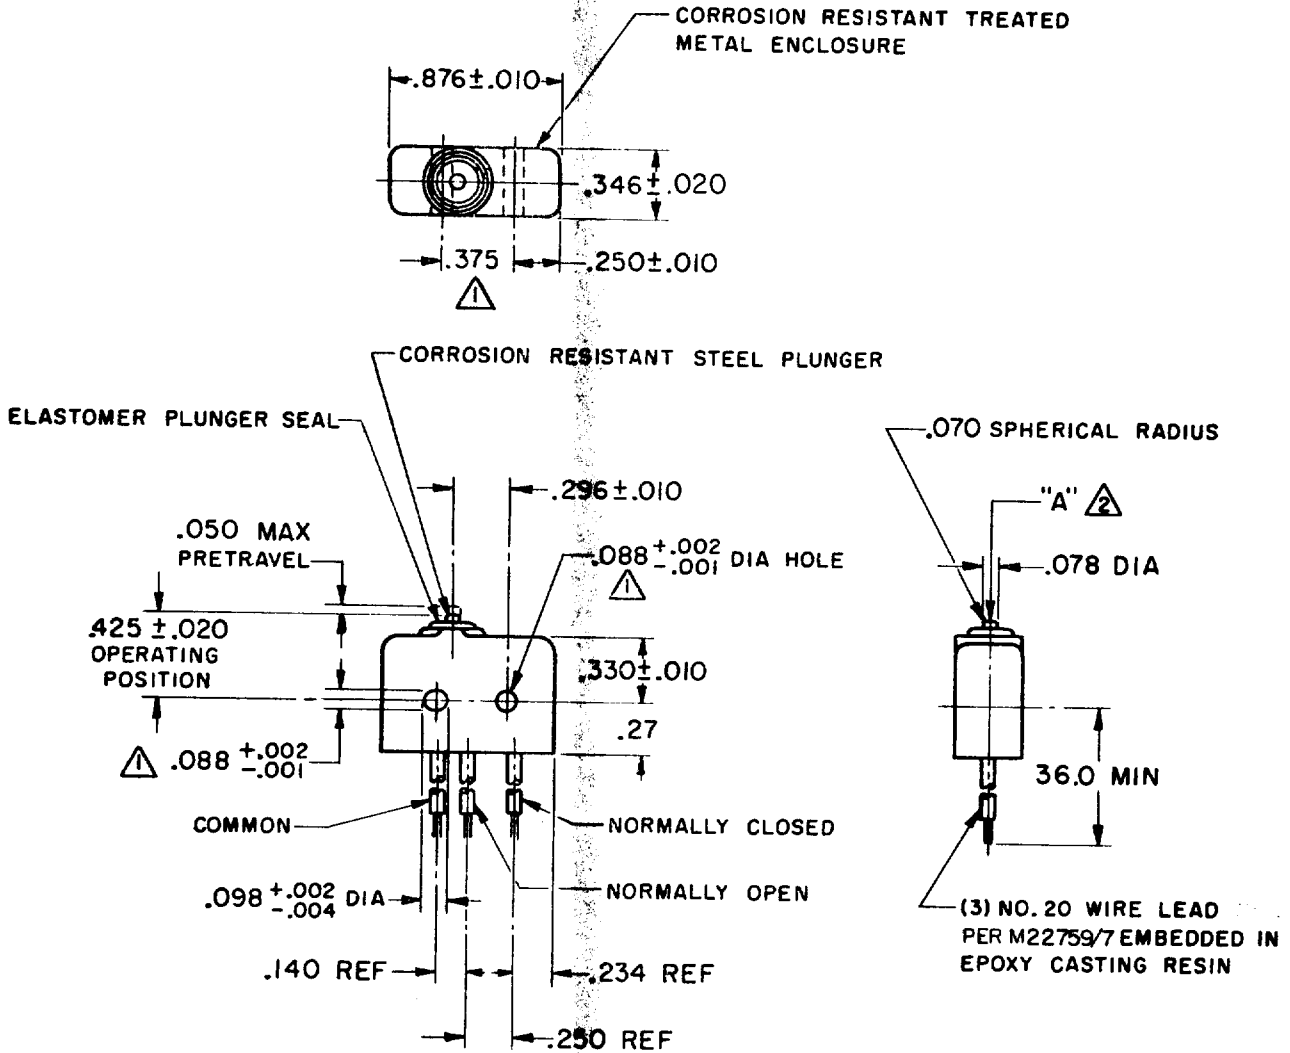

**NOTE -**

- ▲ MOUNTING HOLES WILL ACCEPT .087 MAX DIA PINS OR SCREWS ON .375 ±.002 CENTERS
- ▲ ACTUATION IN LINE WITH ARROW "A" IS RECOMMENDED
- ▲ WEIGHT OF SWITCH ONLY IS .26 OZ MAX. WEIGHT OF SWITCH WITH WIRE LEADS IS 1.38 OZ MAX

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

**CHARACTERISTICS**

OPERATING FORCE	5 - 17 OZ
RELEASE FORCE	4 OZ MIN
RELEASE TRAVEL	.004 MIN
DIFFERENTIAL TRAVEL	.004 MAX
OVERTRAVEL	.003 MIN

**ELECTRICAL DATA**

CONTACT ARRANGEMENT	
S P D T	
250 VAC ----- 5 AMP	
30 VOLTS DC RATING	
INDUCTIVE	SEA LEVEL ----- 3 AMP
	50,000 FT ----- 2.5 AMP
RESISTIVE	SEA LEVEL ----- 5 AMP
	50,000 FT ----- 5 AMP
MAXIMUM INRUSH	----- 24 AMP

**SCALE FULL**

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED  
DIMENSIONS ARE IN INCHES

**TOLERANCES ARE:**

ONE PLACE (.0)	±.030
TWO PLACE (.00)	±.015
THREE PLACE (.000)	±.008
ANGLES	±

WEIGHT ▲