

MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING
2SE323

CATALOG LISTING
2SE323

PAGE 1 OF 1

ISSUE
M
2

REVISIONS
A PR-23523
S A V
25 JUN 98

CHECK
J A F 25 JUN 98


DDM/CAD
DRAWN
S A V 25 JUN 98

RELEASE NO. PR-23523 REPLACES

CHECK


CHECK

CHECK

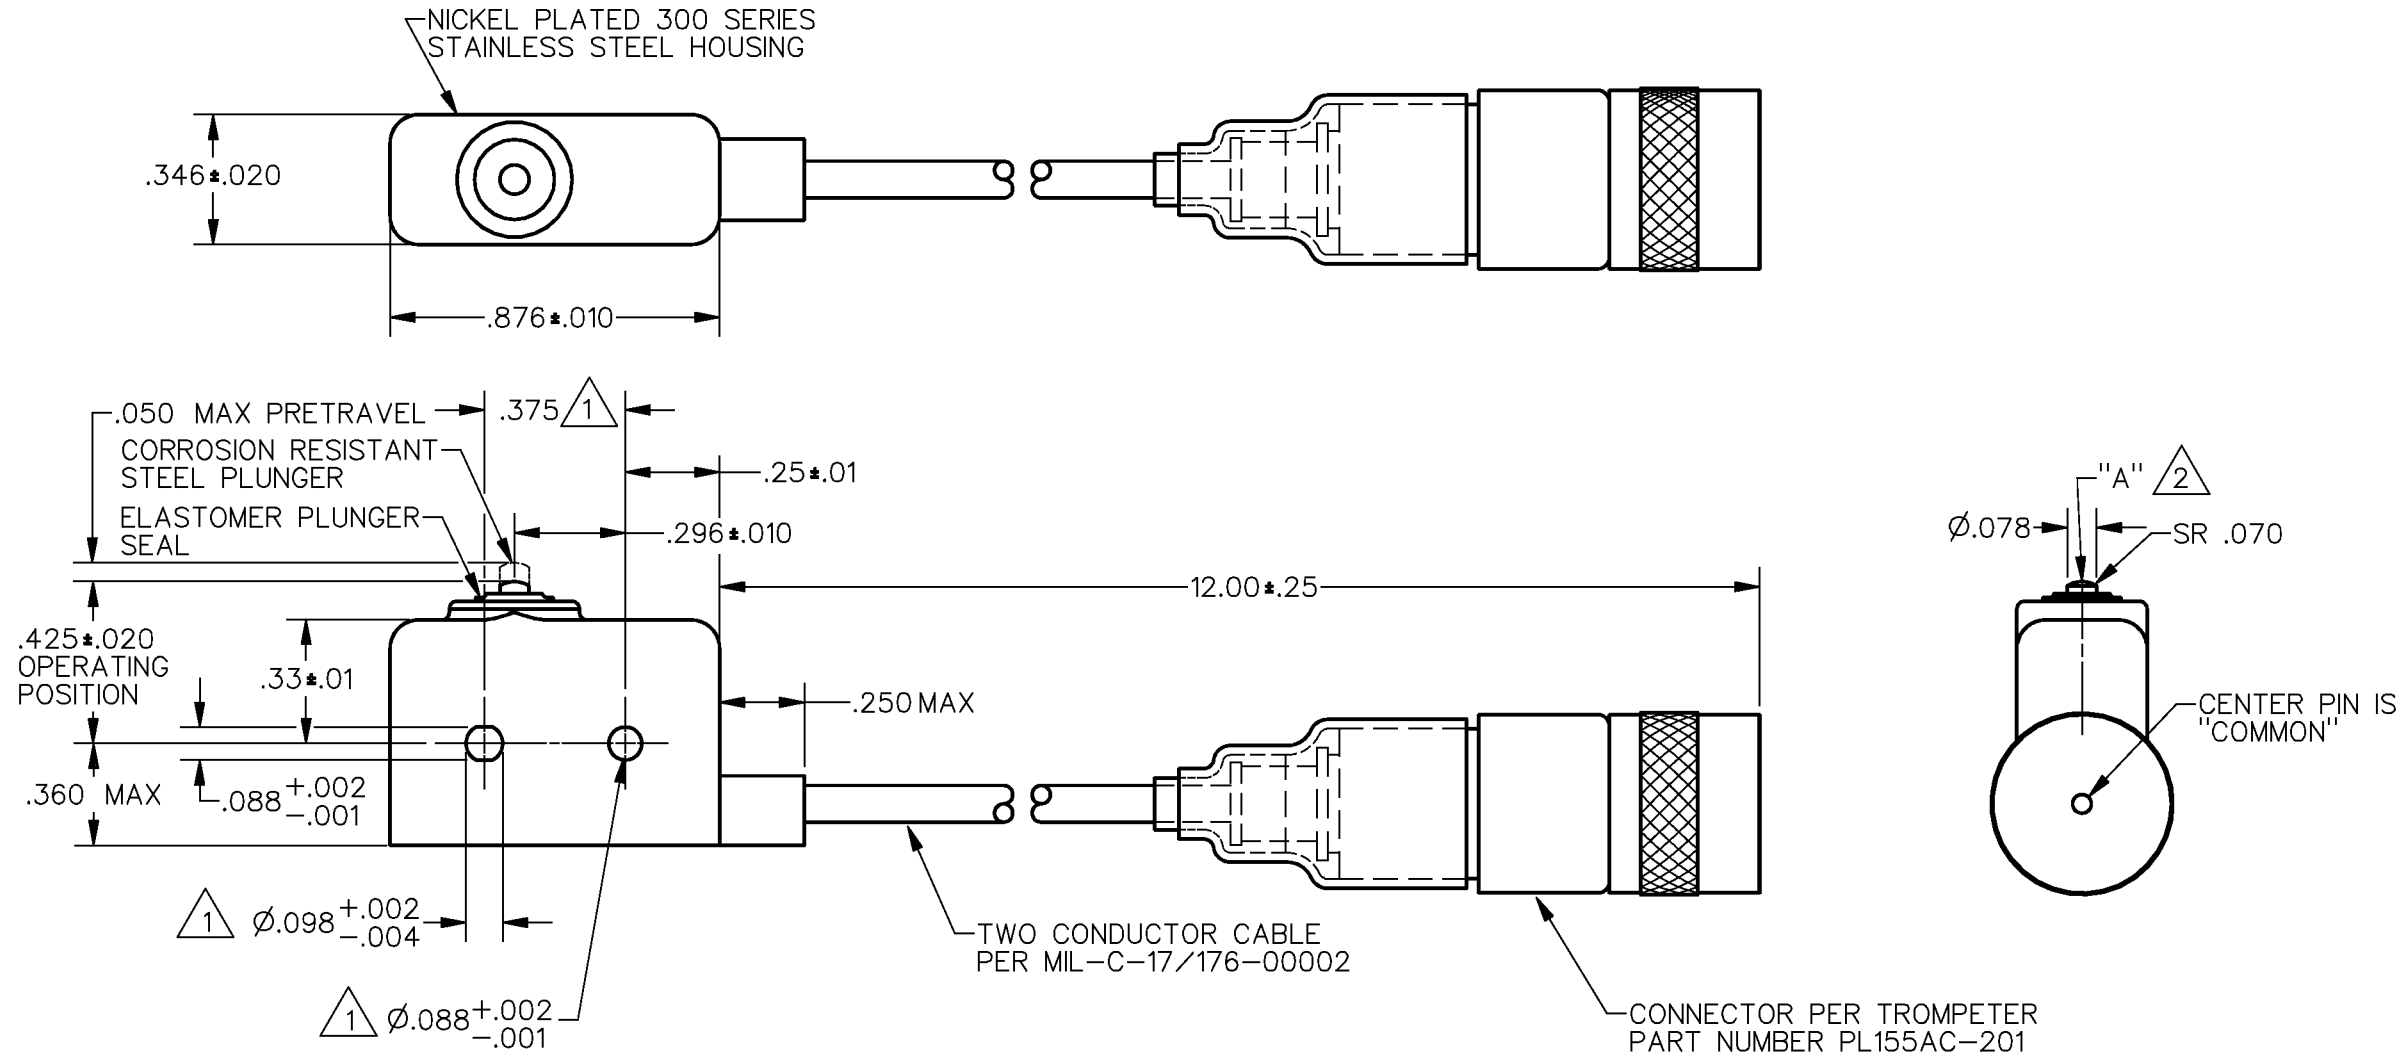

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

THIRD ANGLE PROJECTION



| CHARACTERISTICS | ELECTRICAL DATA |
|------------------------------------|---------------------------------------|
| OPERATING FORCE----- 5 - 17 OZ | CONTACT ARRANGEMENT S P N C |
| RELEASE FORCE ----- 4 OZ MIN | 10 VDC ----- 0.5 MA |
| RELEASE TRAVEL----- .004 MIN | 30 VOLTS DC RATING |
| DIFFERENTIAL TRAVEL ----- .004 MAX | INDUCTIVE -----SEA LEVEL ---- 1/2 AMP |
| OVERTRAVEL----- .003 MIN | 50,000 FT ---- 1/2 AMP |
| | RESISTIVE -----SEA LEVEL ---- 1 AMP |
| | 50,000 FT ---- 1 AMP |
| | MAXIMUM INRUSH ----- 2 AMP |

| SCALE 2:1 | |
|--|--------------|
| DO NOT SCALE PRINT | |
| UNLESS OTHERWISE SPECIFIED TOLERANCES ARE | |
| ONE PLACE (.0) | ± .030 |
| TWO PLACE (.00) | ± .015 |
| THREE PLACE (.000) | ± .005 |
| ANGLES | ± |
| WEIGHT | 50 GRAMS MAX |

NOTES

- Δ 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF ϕ .087 MAX ON .375 ± .002 CENTERS
- Δ 2 ACTUATION IN LINE WITH ARROW "A" IS RECOMMENDED
- 3 - LEADWIRE SHIELDING GROUNDED TO HOUSING
- 4 - BASIC SWITCH HAS 24K SOLID GOLD CONTACT MATERIAL
- 5 - FOR USE IN TEMPERATURE RANGE: -65°F TO +221°F

ANSI Y14.5M-1982 APPLIES