

MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
MINNEAPOLIS, MINN. 55412


FED. MFR. CODE 91929

SWITCH-BASIC

CATALOG LISTING

2SE89

2SE89
 PAGE 1 OF 1
M
 DRAWING NUMBER
 ISSUE 15
 REVISIONS
 A CO16449 NBF 6 APR 62
 B 1085 DWG 0026841 SMA 25 FEB 70
 C RE-INST PR17097 TSK 14 FEB 69
 D C094282 DLM 3 MAR 99
 DRAWN BY MBF
 CHECKED BY DAW
 DATE 6 APRIL 62
 FORMTEK FO-50378

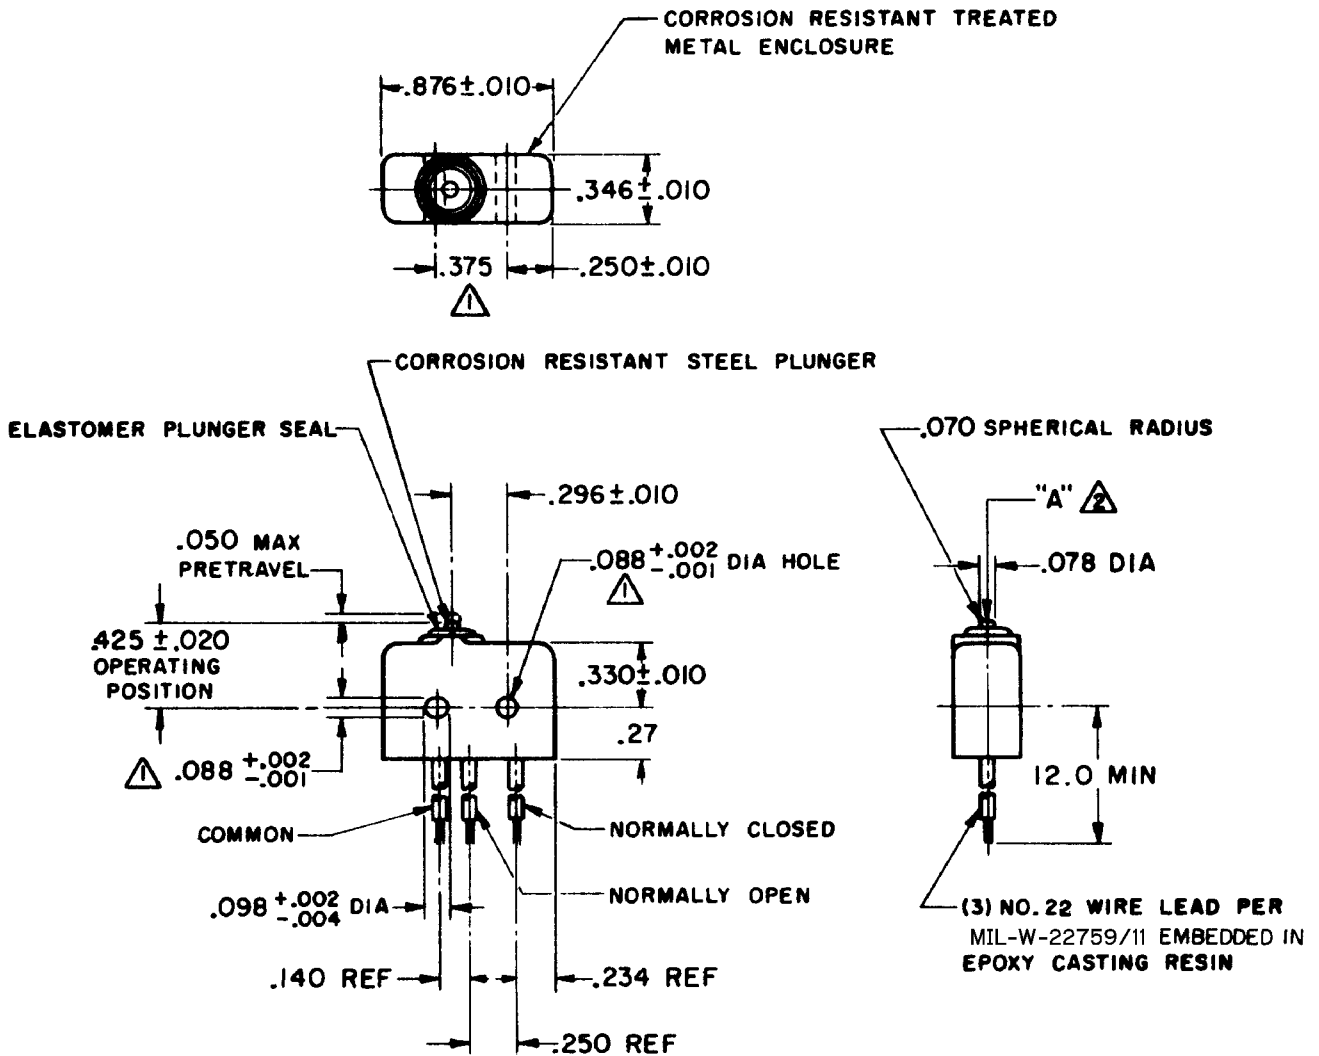

- NOTE -**
- ▲ MOUNTING HOLES WILL ACCEPT .087 MAX DIA PINS OR SCREWS ON .375 ± .002 CENTERS
 - ▲ ACTUATION IN LINE WITH ARROW "A" IS RECOMMENDED
 - ▲ WEIGHT OF SWITCH ONLY IS .26 OZ MAX. WEIGHT OF SWITCH WITH WIRE LEADS IS .48 OZ MAX

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS		ELECTRICAL DATA		SCALE FULL
OPERATING FORCE ----- 5-17 OZ		CONTACT ARRANGEMENT S P D T		DO NOT SCALE PRINT
RELEASE FORCE ----- 4 OZ MIN	250 VAC ----- 5 AMP	30 VOLTS DC RATING		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.005 ANGLES ±
RELEASE TRAVEL ----- .004 MIN	INDUCTIVE ----- SEA LEVEL ----- 3 AMP	50,000 FT ----- 2.5 AMP		
DIFFERENTIAL TRAVEL ----- .004 MAX	RESISTIVE ----- SEA LEVEL ----- 5 AMP	50,000 FT ----- 5 AMP		
OVERTRAVEL ----- .003 MIN	MAXIMUM INRUSH ----- 24 AMP			
				WEIGHT ▲ 3