MICRO SWITCH

FREEPORT ILLINOIS. U.S.A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING
BZ-2RW80722555105-A2

PRODUCT CODE: AQC9700

WHEN SEARCHING FOR THIS CATALOG LISTING WITHIN HONEYWELL'S INTERNAL SAP SYSTEM, THE LISTING MUST BE ENTERED WITHOUT DASHES (BZ2RW80722555105A2) DUE TO CHARACTER LIMITATIONS IMPOSED BY THE SYSTEM

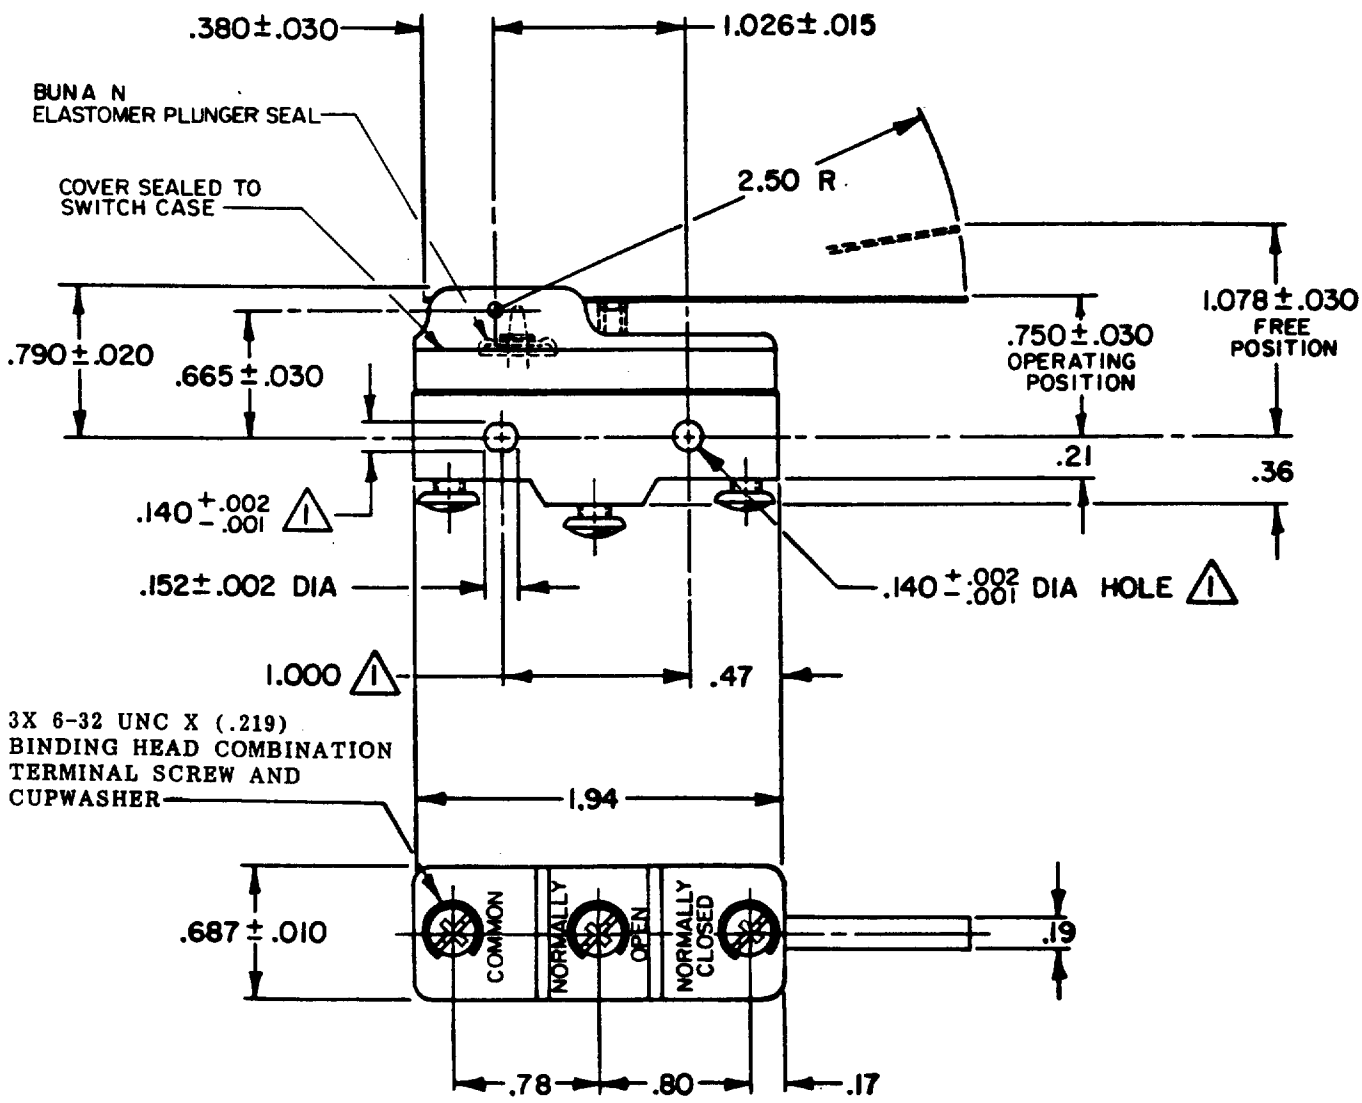

NOTES
1 - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000±.002 CENTERS
2 - SEALED CONSTRUCTION PROVIDES SPLASH RESISTANCE
3 - CONTACT MATERIAL - GOLD ALLOY

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS

OPERATING FORCE — — 2 1/2 OZ MAX

RELEASE FORCE — — — 1/2 OZ MIN

DIFFERENTIAL TRAVEL — —.007 - .050

OVERTRAVEL — — — — — .219 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L22 1A 125 VAC

L288
L307
L315 1A 250V ~ T85 25E3

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

	DIM. mm	TOL. mm/m	DIM. in	TOL. in/ft
NO PLACES	X	1/.04		
ONE PLACE	X.X	0.4/.015	X.X	0.5/.02
TWO PLACES	X.XX	0.15/.005	X.XX	0.25/.015
THREE PLACES			X.XXX	0.13/.005
ANGLES				

DESIGN UNITS — IN METRIC ☐ — US CUSTOMARY ☒

WEIGHT

REVISIONS

A	C067209	JAP 3 MAY 90
B	CO-73287-J	JAL 22 NOV 93
C	C093346	DLT 19 AUG 98
D	0016786	SPK 23NOV05
E	0046794	KNR 11DEC08

ISSUE	DRAWING NUMBER	RELEASE NO.	REPLACES
6	M BZ-2RW80722555105-A2 PAGE 1 OF 1	PR-10187	X72349-BZ

DRAWN	CHECK	CHECK	CHECK	CHECK	CHECK
T M M 13 MAY 81	RS 11 DEC 08	RJ 23NOV05	C E B 18 MAY 81		

RASTER
FO-52848-A