MICRO SWITCH
FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL INC.
FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING
WZ-3RW8221555514T-S

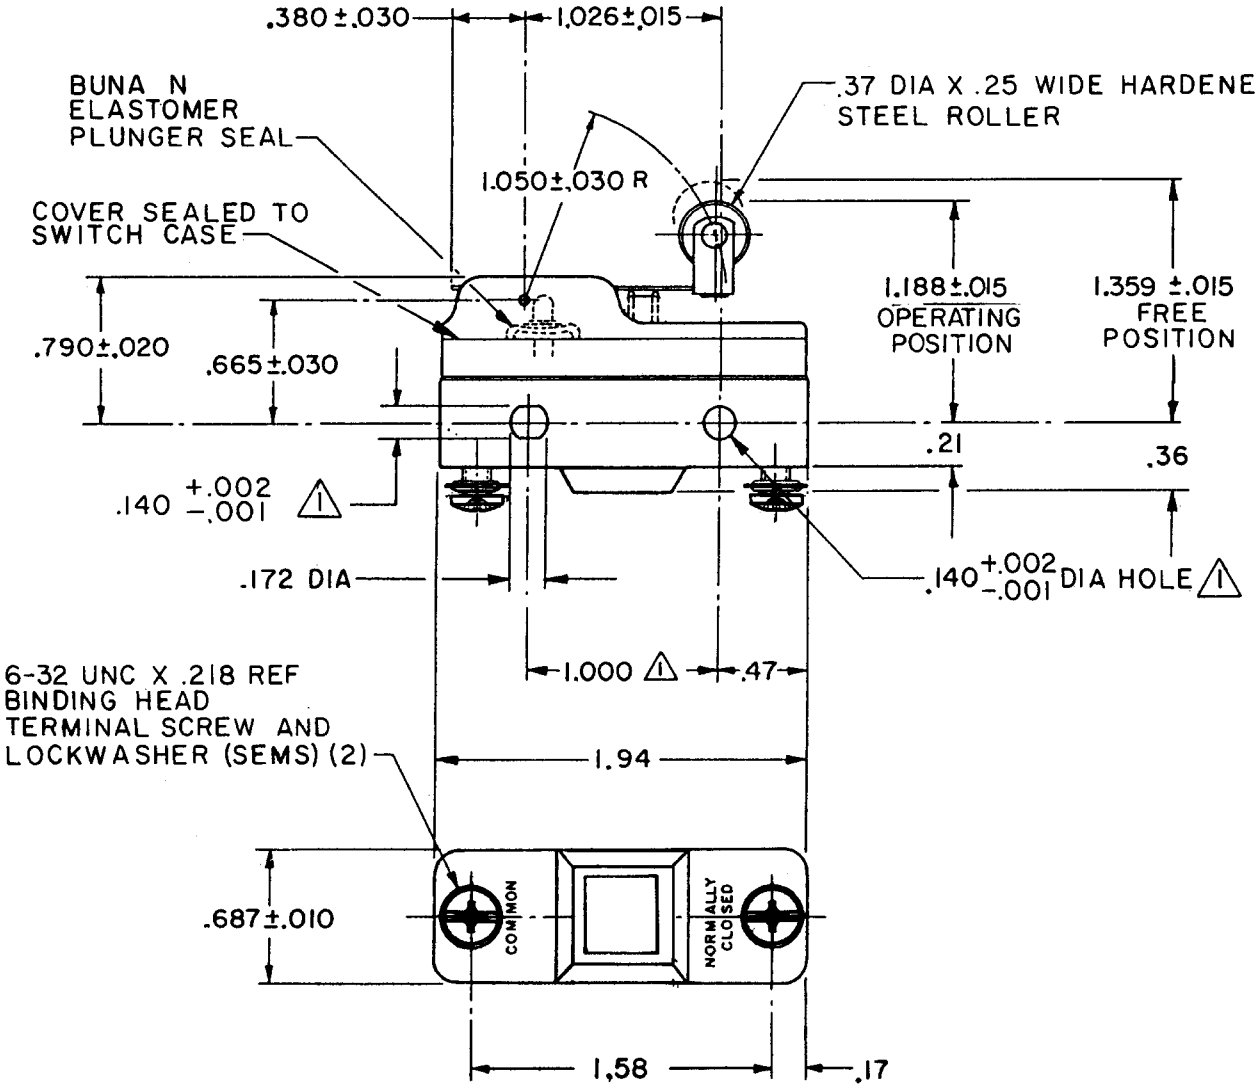

NOTE
1 - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000±.002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS

OPERATING FORCE — — 10 OZ MAX

RELEASE FORCE — — 1 1/2 OZ MIN

DIFFERENTIAL TRAVEL — .007–.030

OVERTRAVEL — — — — .094 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P N C

L9
10A 125, 250 OR 480 VAC
1/2 A 125 VDC, 1/4 A 250 VDC

L288

SCALE FULL — DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT

M WZ-3RW8221555514T-S PAGE 1 OF 1
RELEASE NO. PR-17934 REPLACES
DRAWING NUMBER
ISSUE 6

REVISIONS

A	C067209	J A P 2 MAY 90
B	CO-69351-D	JWB 18 JUL 91
C	CO-77591	DAW 22 JUN 94
D	CO 79125	SAD 30 NOV 94
E	C093346	DLT 17 AUG 98

CHECK | CHECK | CHECK | JAP 13 JAN 90 | CHECK | BAB 10 JAN 90 DRAWN

FORMTEK FO-52848-B