


CATALOG LISTING	ISSUE	2
	PAGE 1 OF 1	1

REPLACES -

RELEASE NO. 203932

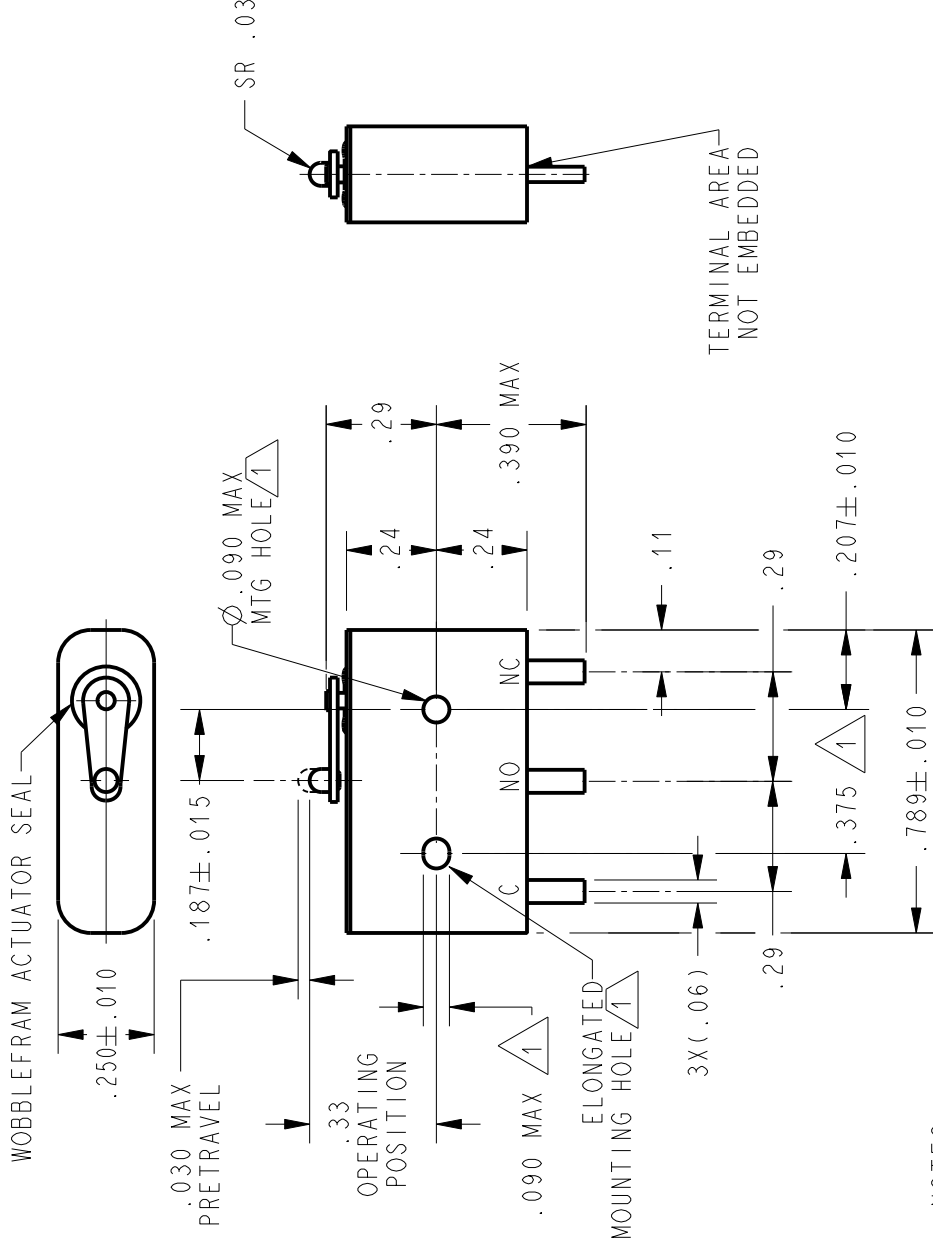

NOTES

- 1 - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF $\varnothing .087$ MAX ON $.375 \pm .002$ CENTERS
- 2 - FOR USE IN TEMPERATURE RANGE -300°F TO $+500^{\circ}\text{F}$
- 3 - HERMETICALLY SEALED (METAL-TO-METAL, GLASS-TO-METAL)
- 4 - ALL EXPOSED PARTS ARE OF CORROSION RESISTANT MATERIALS
- 5 - TERMINALS ARE TINNED FOR SOLDERING
- 6 - DO NOT: APPLY MORE THAN 1 1/2 INCH-LBS OF TORQUE WHEN TIGHTENING MOUNTING SCREWS
- 7 - GOLD ALLOY MOVABLE CONTACTS AND GOLD ALLOY STATIONARY CONTACTS
- 8 - DRY NITROGEN FILL GAS

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS		ELECTRICAL DATA	
OPERATING FORCE	----- .11.0 OZ MAX	CONTACT ARRANGEMENT	S P D T
DIFFERENTIAL TRAVEL	----- .004 MAX	28 VOLTS DC RATING	
RELEASE FORCE	----- 1.5 OZ MIN	INDUCTIVE -- SEA LEVEL - 1/4 AMP	
OVERTRAVEL	----- .006 MIN	RESISTIVE -- SEA LEVEL - 1/2 AMP	
		DIELECTRIC STRENGTH	
		500 VRMS - 500 μA MAX LEAKAGE	
		SCALE	2 : 1
		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	DO NOT SCALE PRINT
		ONE PLACE (.0)	+ .030
		TWO PLACE (.00)	+ .015
		THREE PLACE (.000)	+ .005
		ANGLES	+
		WEIGHT	.014 LB MAX



PTC/CAD 2D
DRAWN

13SEP01

13SEP01

CHECK SAV

13SEP01

CHECK AK

APR 04

CHECK AK

APR 04

CHECK

2

ISSUE

CATALOG LISTING

19HM6-CB

PAGE 1 OF 1

REPLACES -

RELEASE NO. 203932

FED. MFG. CODE 91929

MICRO SWITCH

a Honeywell Division

SWITCH-BASIC

CATALOG LISTING

19HM6-CB