





# Heyco® Nylon PCB Supports - Blind, Key Slot & Rivet Mount

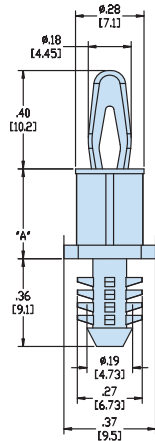


BAYONET SNAP FIT 10,2 / BLIND FIR TREE

**HBS5**

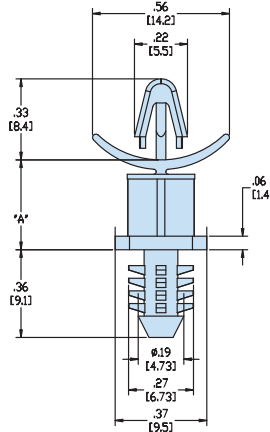


ARROWHEAD SNAP LOCK / BLIND FIR TREE

**HBS6**

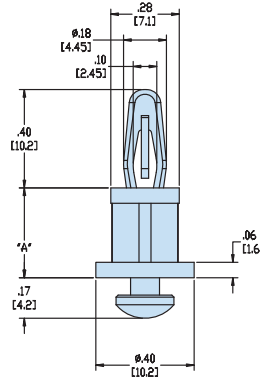

BAYONET SNAP LOCK 10,2 / KEY SLOT BUTTON

**HKSLBN - Key Slot**




BAYONET SNAP LOCK 10,2 / RIVET

**HRLSP - Rivet**

	Minimum Thickness		Mounting Hole Diameter		Minimum Thickness		Mounting Hole Diameter		Maximum Thickness		Mounting Slot Width		Maximum Thickness		Mounting Hole Diameter	
	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.
<b>PCB</b>	.062	1,6	.157	4,0	.078	2,0	.157	4,0	.062	1,6	.157	4,0	.062	1,6	.157	4,0
<b>Chassis</b>	.250	6,4	.250	6,4	.250	6,4	.250	6,4	.062	1,6	see diagram		see table		.165	4,2

A	PART NO. Natural	DESCRIPTION	PART NO. Natural	DESCRIPTION	PART NO. Natural	DESCRIPTION	PART NO. Natural	DESCRIPTION
.125							<b>10611</b>	HKSLBN-02
.187	<b>10587</b>	HBS5-03						
.250	<b>10588</b>	HBS5-04	<b>10596</b>	HBS6-04	<b>10612</b>	HKSLBN-04		
.375	<b>10589</b>	HBS5-06	<b>10597</b>	HBS6-06	<b>10613</b>	HKSLBN-06	<b>10603</b>	HRLSP-06
.437	<b>10590</b>	HBS5-07					<b>10604</b>	HRLSP-07
.500	<b>10591</b>	HBS5-08	<b>10598</b>	HBS6-08	<b>10614</b>	HKSLBN-08	<b>10605</b>	HRLSP-08
.625	<b>10592</b>	HBS5-10	<b>10599</b>	HBS6-10			<b>10606</b>	HRLSP-10
.750	<b>10593</b>	HBS5-12	<b>10600</b>	HBS6-12			<b>10607</b>	HRLSP-12
.875	<b>10594</b>	HBS5-14	<b>10601</b>	HBS6-14			<b>10608</b>	HRLSP-14
1.000							<b>10609</b>	HRLSP-16

Standard color natural. For special order parts in UL 94V-0 natural material, add the suffix “F” to Part No.



**Rivet Table for HRLSP**

PART NO.	PANEL THICKNESS	
	in.	mm.
<b>Black</b>		
<b>9058</b>	.03 - .06	0,7 - 1,6
<b>9060</b>	.06 - .11	1,6 - 2,7
<b>9062</b>	.11 - .15	2,7 - 3,7
<b>9064</b>	.15 - .19	3,7 - 4,7
<b>9068</b>	.22 - .26	5,7 - 6,7

Rivet applied from Chassis side.

Material: Nylon 6/6  
 Flammability Rating: 94V-2  
 Temperature Range: .4°F (-18°C) to 185°F (85°C)

*Quick Specs*