
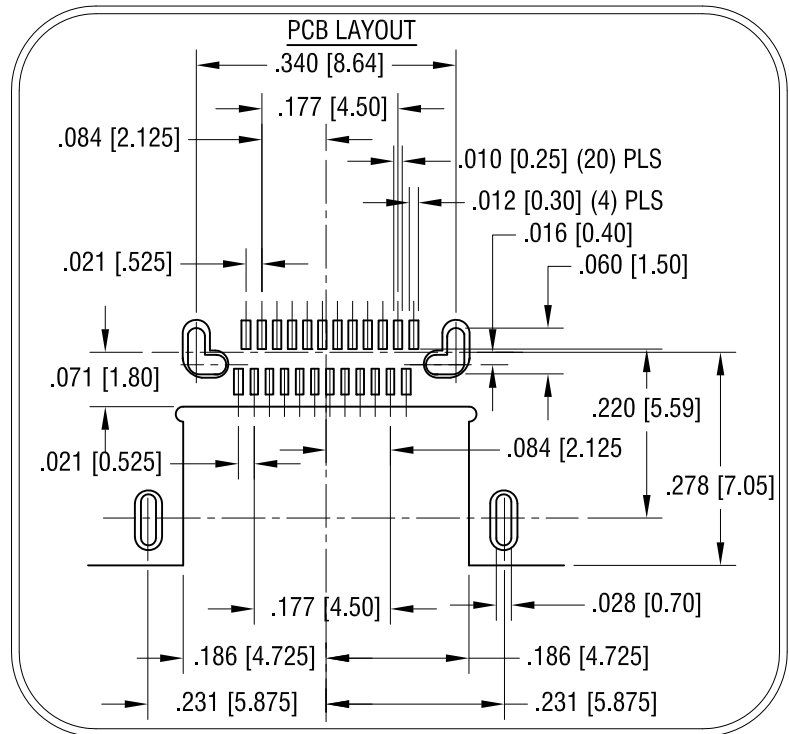
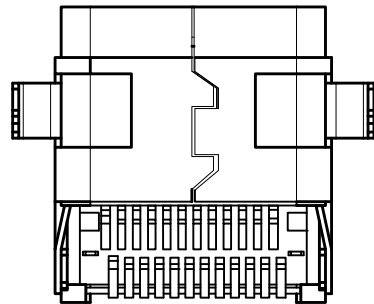



THIS DOCUMENT IS THE PROPERTY OF
KEYSTONE ELECTRONICS CORP. AND
SHALL NOT BE REPRODUCED, DISTRIBUTED
OR USED AS A BASIS FOR MANUFACTURE
WITHOUT PRIOR WRITTEN PERMISSION
FROM KEYSTONE ELECTRONICS CORP.

ACTUAL SIZE

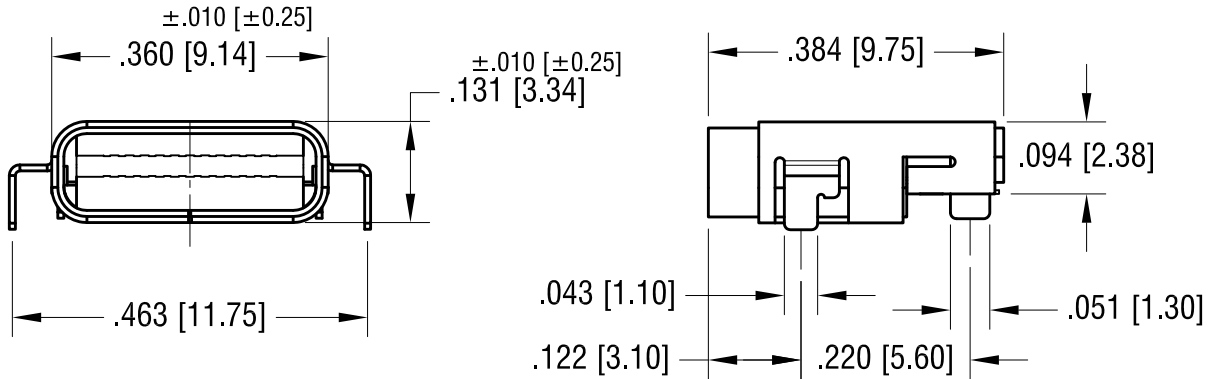

NOTE:

1. SHELL: MAT'L- STAINLESS STEEL
FINISH: NICKEL PLATE
2. CONTACT: MAT'L .005 [0.12] THK BRASS
GOLD PLATE
3. HOUSING: LCP, CLASS FILLED
4. OPERATING TEMPERATURE -55°C TO +85°C

5. CONTACT RESISTANCE:.

- INITIAL: 20 milli OHMS MAX.
 INSULATION RESISTANCE- 100 Mega OHMS MIN.
 DIELECTRIC STRENGTH: 100 Vac Rms 60Hz. 1Min.

KEYSTONE ELECTRONICS CORP.

www.keyelco.com • ASTORIA, N.Y. 11105-2017 • Tel (718) 956-8900

PART NAME

USB 3.1 TYPE-C RECEPTACLE- SMT TYPE

MATERIAL

AS NOTED

FINISH

AS NOTED

DRN BY

NT

DATE

4.13.15

APP'D

LN

SCALE

4X

TOLERANCES

INCH [MM]

DECIMAL $\pm .005 [\pm 0.13]$

ANGULAR $\pm 1^\circ$

UNLESS OTHERWISE SPECIFIED

CODE

C

DWG NO.

953

DATE

DESCRIPTION

REV.