

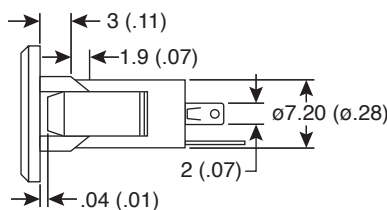




2 Conductor Mini Mono Jack 3.5ø - 2


161-164SP-EX

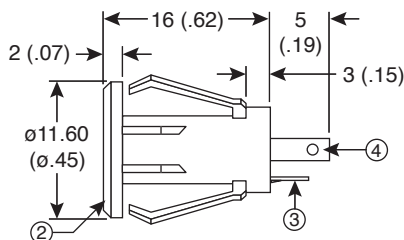

2 Conductor Mini Mono Jack 3.5ø - 2



Mounting Hole Dimension



Thickness of mounting board:
 $t=1\sim 1.80$
 $(t=.04\sim .027)$

Part	Material	Finish
Contact B	BSR t=0.3	Ni
Contact A	FAB-EH t=0.25	Ni
Body	PA 66	
Metal	BSBM	Au

Dimensions: mm (In.)

SPECIFICATIONS	
Dielectric strength	500VAC for one minute
Contact Resistance:	50mΩ max.
Insulation Resistance:	100MΩ min. @ 500VDC

Date Last Revised: 12-6-05

Available from Mouser Electronics
 1-800-346-6873
 www.mouser.com

KC-300936

161-164SP-EX