


# 4 Conductor Sub-Miniature Jack

161-6900-EX



4 Conductor Sub-Miniature Jack

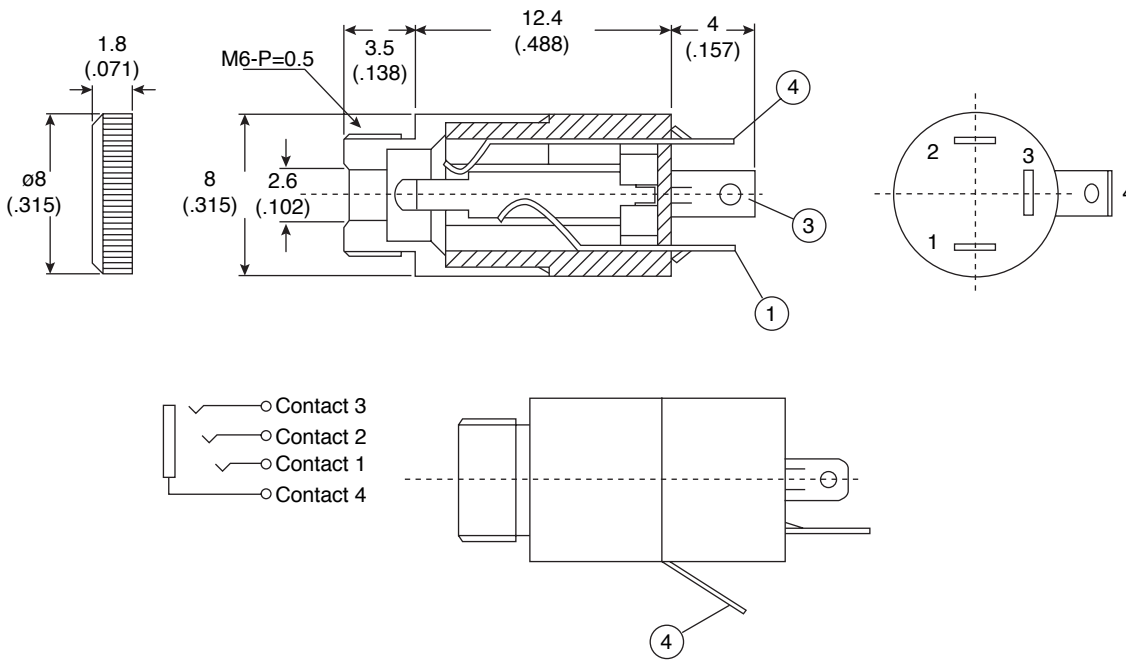

## DIMENSIONS mm (In.)

SPECIFICATIONS	
<b>Dielectric strength:</b>	500V AC for one minute
<b>Insulation resistance:</b>	100MΩ min. at 500V DC
<b>Contact resistance:</b>	500mΩ max.
<b>Body:</b>	PBT G 30%
<b>Contacts:</b>	nickel plated brass
RoHS Compliant by Exemption	

Date Last Revised: 12-8-05

**Available from Mouser Electronics**  
**1-800-346-6873**  
**www.mouser.com**

KC-300955

161-6900-EX